


Plume management kit

The plume kit enables the relocation of the flue outlet of a standard horizontal flue system to another position and is available as an optional extra.



- ❖ Ensure the maximum length of 3 m (externally) and 7 m (internally) is not exceeded
- ❖ The maximum length is reduced by 1 m when using a further 87° bend or 2 x 45° bends
- ❖ Deduct 3 m from the maximum possible standard concentric horizontal flue length and add the standard plume kit maximum length to give maximum length of entire flue system, ie. 6 m - 3 m + 2 m = 5 m maximum

The standard plume kit comprises of the following parts:

- ❖ 87° connection to horizontal terminal
- ❖ 1 m pipe extension
- ❖ 87° flue outlet elbow with bird mesh
- ❖ Fixing clamps

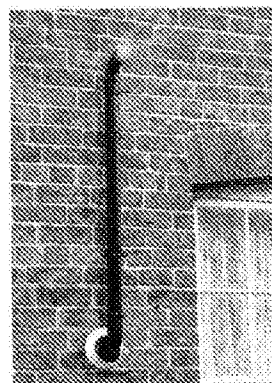

Installed to prevent nuisance plumbing across the window

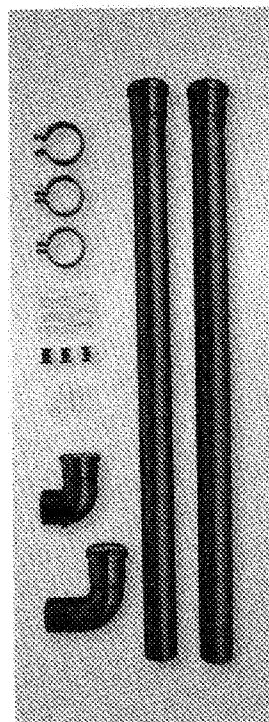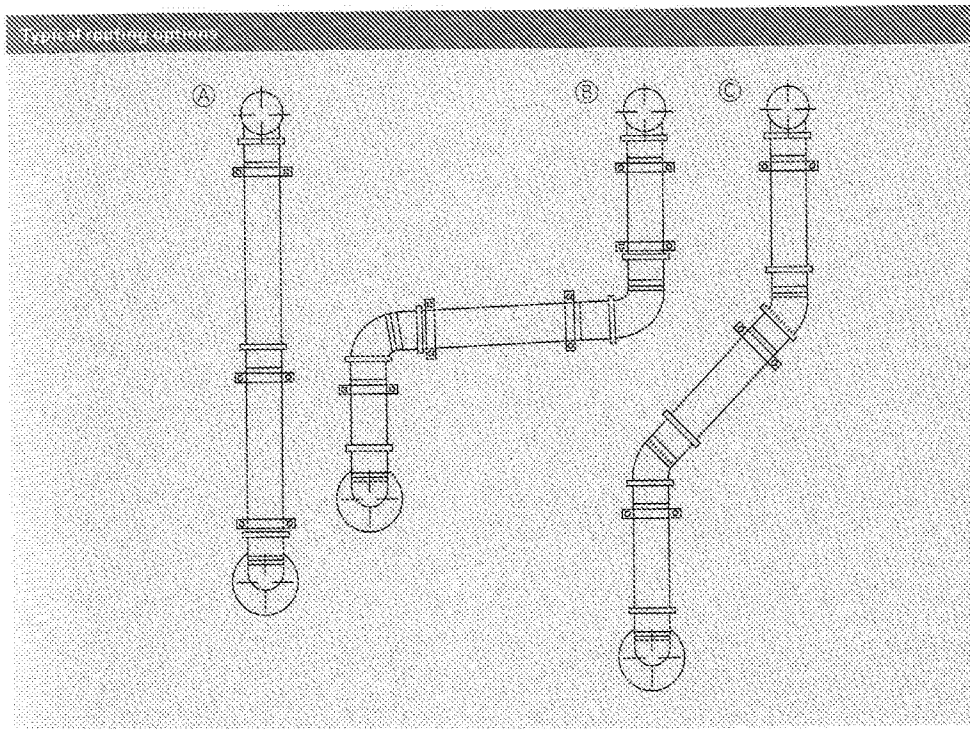

Kit contents

Item	Part no.
A Plume kit standard delivery 2 m max. length	7373238
B Plume kit standard delivery additional options	
2 x 87° bends	7373267
1 pipe 1 m long	7373268
C Plume kit standard delivery additional option	
2 x 45° bends	7373266
1 pipe 1 m long	7373268
Fixing clamps	7246572