


1.0 GROUND CONDITIONS: The customer should ensure that the ground conditions are suitable for the proposed installation detail. Engineering advice may be necessary.

2.0 WATERTIGHT JOINTS: Where a secure watertight joint is required between the pipework and the SuDS Swale Inlet unit, a suitable proprietary sealant should be used.

3.0 SURFACE PROTECTION: The installer should ensure that the adjacent ground level is higher than the SuDS Swale Inlet unit to avoid damage to the unit during installation or mowing activities.

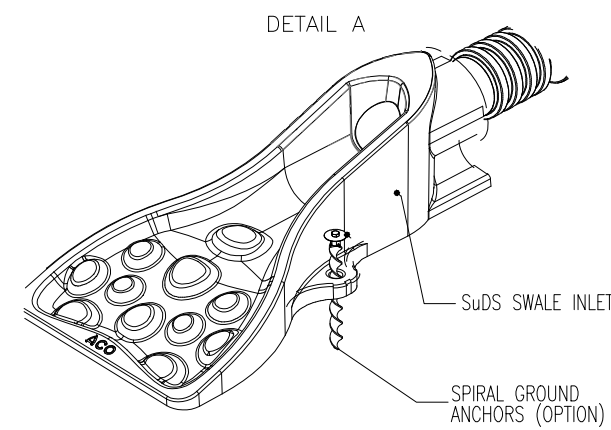

Client		MJA CONSULTING CIVIL AND STRUCTURAL ENGINEERS Monarch House, Barton Lane, Abingdon, Oxon, OX14 3NB Tel: 01235 555173 Fax: 01235 523226			
Project					
Title		Scale	Date	Drawing No.	Rev
Attenuation Details		AsShown@A2	Sep'17	5655:70	E
		Checked WSR	Drawn DT		