



ENVIROCHEM

Analytical Laboratories Ltd

12 The Gardens, Broadcut, Fareham
Hampshire. PO16 8SS

Fibre Counting Report



CLIENT: Blaze Construction

SITE ADDRESS: West End Nursery, Roundstone Lane, Angmering, Littlehampton, BN16
4AX

Our Ref: J143518 - FC12

Your Ref: N/A

SAMPLING PROTOCOL: Reassurance

SAMPLED BY: M Wagstaff

ANALYSED BY (if different):

DATE OF SAMPLING: 24/05/2018

DATE OF ANALYSIS (if different):

Filter No.	Pump	Head	Location	Time on	Time off	Flow (litres/min)			Volume (V) litres	Grats (n)	Fibres (N)	Calculation fibres/ml	Reported result fibres/ml
						Flow (start)	Flow (finish)	Flow (used)					
FC-7	50	MW3	Location 7; front of asbestos mound	10.34	11.34	8.0	8.0	8.0	480	200	3	0.002	<0.01
FC-8	ENV41	MW4	Location 8; front of in fill hole	10.35	11.35	8.0	8.0	8.0	480	200	2.5	0.001	<0.01
FC-10	ENV21	MW1	Location 9; next to asbestos waste skip	13.58	14.58	8.0	8.0	8.0	480	200	1.5	0.001	<0.01
FC-11	RY2	MW2	Location 10; within exclusion zone, opposite warehouses	13.59	14.59	8.0	8.0	8.0	480	200	2	0.001	<0.01
FC-12	50	MW3	Location 11; within exclusion zone, opposite warehouses	13.59	14.59	8.0	8.0	8.0	480	200	2	0.001	<0.01

1. Unless otherwise stated, the detection limit is 0.01 fibres/ml.

3. Comments, observations and opinions are outside the scope of UKAS accreditation.

5. For clearance sampling, this report must be read in conjunction with the certificate of reoccupation.

2. Samples collected by the client are evaluated using information provided by the client.

4. Fibres were counted on membrane filter(s) in accordance with the HSE Guidance Note HSG 248.

Equipment Numbers:

Microscope: Meiji 10

Stage Micrometer: WSM 13

Tally Counter: S/US

Barometer: BTC 26

Thermometer: BTC 26

Flow Meter: FM22

Environment:

Temperature (°C): 21

Pressure (mb): 1015

Correction Factor (F): -

Diam. of dust deposit (D) (mm): 22.5

Test Slide (5 bands): Yes/No

W/B Grat diameter (µm): 100

Blank Filter

Head: 5

Graticules:

Fibres:

Place of Analysis:

Lab

On Site

Mob Lab RF11 PVK

Comments

Reassurance air monitoring during movement of asbestos earth from mound to hole within exclusion zone. See map for sampling locations. Continuous rainfall throughout FC-10 - FC12. Results: satisfactory

SIGNATURE

(on behalf of Envirochem by an authorised signatory)

ENVIROCHEM/FORMS/WORKSHEETS/02/ISSUE07/NOV06

PRINT NAME: M Wagstaff



ENVIROCHEM

Analytical Laboratories Ltd

12 The Gardens, Broadcut, Fareham
Hampshire. PO16 8SS

Fibre Counting Report



CLIENT: Blaze Construction

SITE ADDRESS: West End Nursery, Roundstone Lane, Angmering, Littlehampton, BN16
4AX

Our Ref: J143518 - FC12

Your Ref:

SAMPLING PROTOCOL: Personal

SAMPLED BY: M Wagstaff

ANALYSED BY (if different):

DATE OF SAMPLING: 24/05/2018

DATE OF ANALYSIS (if different):

Filter No.	Pump	Head	Location	Time on	Time off	Flow (litres/min)			Volume (V) litres	Grats (n)	Fibres (N)	Calculation fibres/ml	Reported result fibres/ml
						Flow (start)	Flow (finish)	Flow (used)					
FC-9	0236	MW5	On operative Andy Ryder, in roller cab	11.58	13.13	3.0	3.0	3.0	225	100	2	0.005	<0.04

1. Unless otherwise stated, the detection limit is 0.01 fibres/ml.

3. Comments, observations and opinions are outside the scope of UKAS accreditation.

5. For clearance sampling, this report must be read in conjunction with the certificate of reoccupation.

2. Samples collected by the client are evaluated using information provided by the client.

4. Fibres were counted on membrane filter(s) in accordance with the HSE Guidance Note HSG 248.

Equipment Numbers:

Microscope: Meiji 10

Barometer: BTC 25

Stage Micrometer: WSM 13

Thermometer: BTC 25

Tally Counter: 8/US

Flow Meter: FM22

Environment:

Temperature (°C): 20

Pressure (mb): 1014

Correction Factor (F): -

Diam. of dust deposit (D) (mm): 22.5

Test Slide (5 bands): Yes/No

W/B Grate diameter (µm): 100

Blank Filter

Head: MW5

Graticules: -

Fibres: -

Place of Analysis:

Lab RF11 PVK

On Site

Mob Lab

Comments Personal air testing carried out during the asbestos muck away of contaminated mound to hole. Operative operating a roller, leveling out contaminated soil within designated in fill hole.

SIGNATURE:

(on behalf of Envirochem by an authorised signatory)

ENVIROCHEM/FORMS/WORKSHEETS/02/ISSUE07/NOV06

PRINT NAME: M Wagstaff



ENVIROCHEM

Analytical Laboratories Ltd

12 The Gardens
Broadcut, Fareham
Hampshire. PO16 8SS

Ref No: J143518 FC12

Personal Monitoring Observation Form


Type & Scale of work:	Remediation ground works of former nursery		
Purpose of monitoring: (select all that apply)			
Checking effectiveness of methods	☒	Providing data for personal exposure records	☒
		Confirming appropriate RPE being worn	☒
General control measures in use: (select all that apply)			
Enclosure (under negative pressure)	☐	Partial enclosure	☐
Gel/Foam	☐	Shadow vacuum	☐
Other (Please specify):		Decontamination unit, exclusion zone	
Injection ☐			
Spraying ☐			
Sampling Details:			
Operative's Name/job title: Andy Ryder, roller driver			
Type of RPE worn: N/A			
Length of time Operative is / has been exposed: Approximately 4.5 hours			
Asbestos Product(s) being removed including detail of fixings, size, surface treatment and tools used during works and dust suppression methods being used by operative:			
Asbestos materials identified within the soil matrix			
General Description of activities being undertaken during sampling:			
Movement of asbestos containing earth material to a designated in fill hole. Earth is loaded onto a dumper by a digger and transported within an exclusion zone.			
Is the asbestos in good or bad condition (as per the method statements description): Degraded			
Other factors which may affect the result (eg approximate size of the enclosure, external location, etc):			
External location, rainfall during sampling			
Time weighted average (4 Hour TWA) = $\frac{(F1 \times T1) + (F2 \times T2) + \dots + (Fn \times Tn)}{4}$			
Not required			
Where F = concentration f/ml			
T = Time for that exposure, hours and minutes, 1 hr 30 mins = 1.5			
Notes: The sampling period must be sufficient to ensure it is fully representative of the work. Sampling periods should be for 4 hours to access the control limit or for the duration of a specific task for shorter duration activities. A minimum sample time of 10 minutes is required to assess the Short Term Exposure Limit. In general, the client is to specify their requirements depending on previous personal air sampling carried out. All information was collected from the method statement or / and the site contact and this information is deemed as accurate / correct for the purpose of this report.			

Analyst: M Wagstaff

Signature

ENVIROCHEM

ARUN DISTRICT COUNCIL

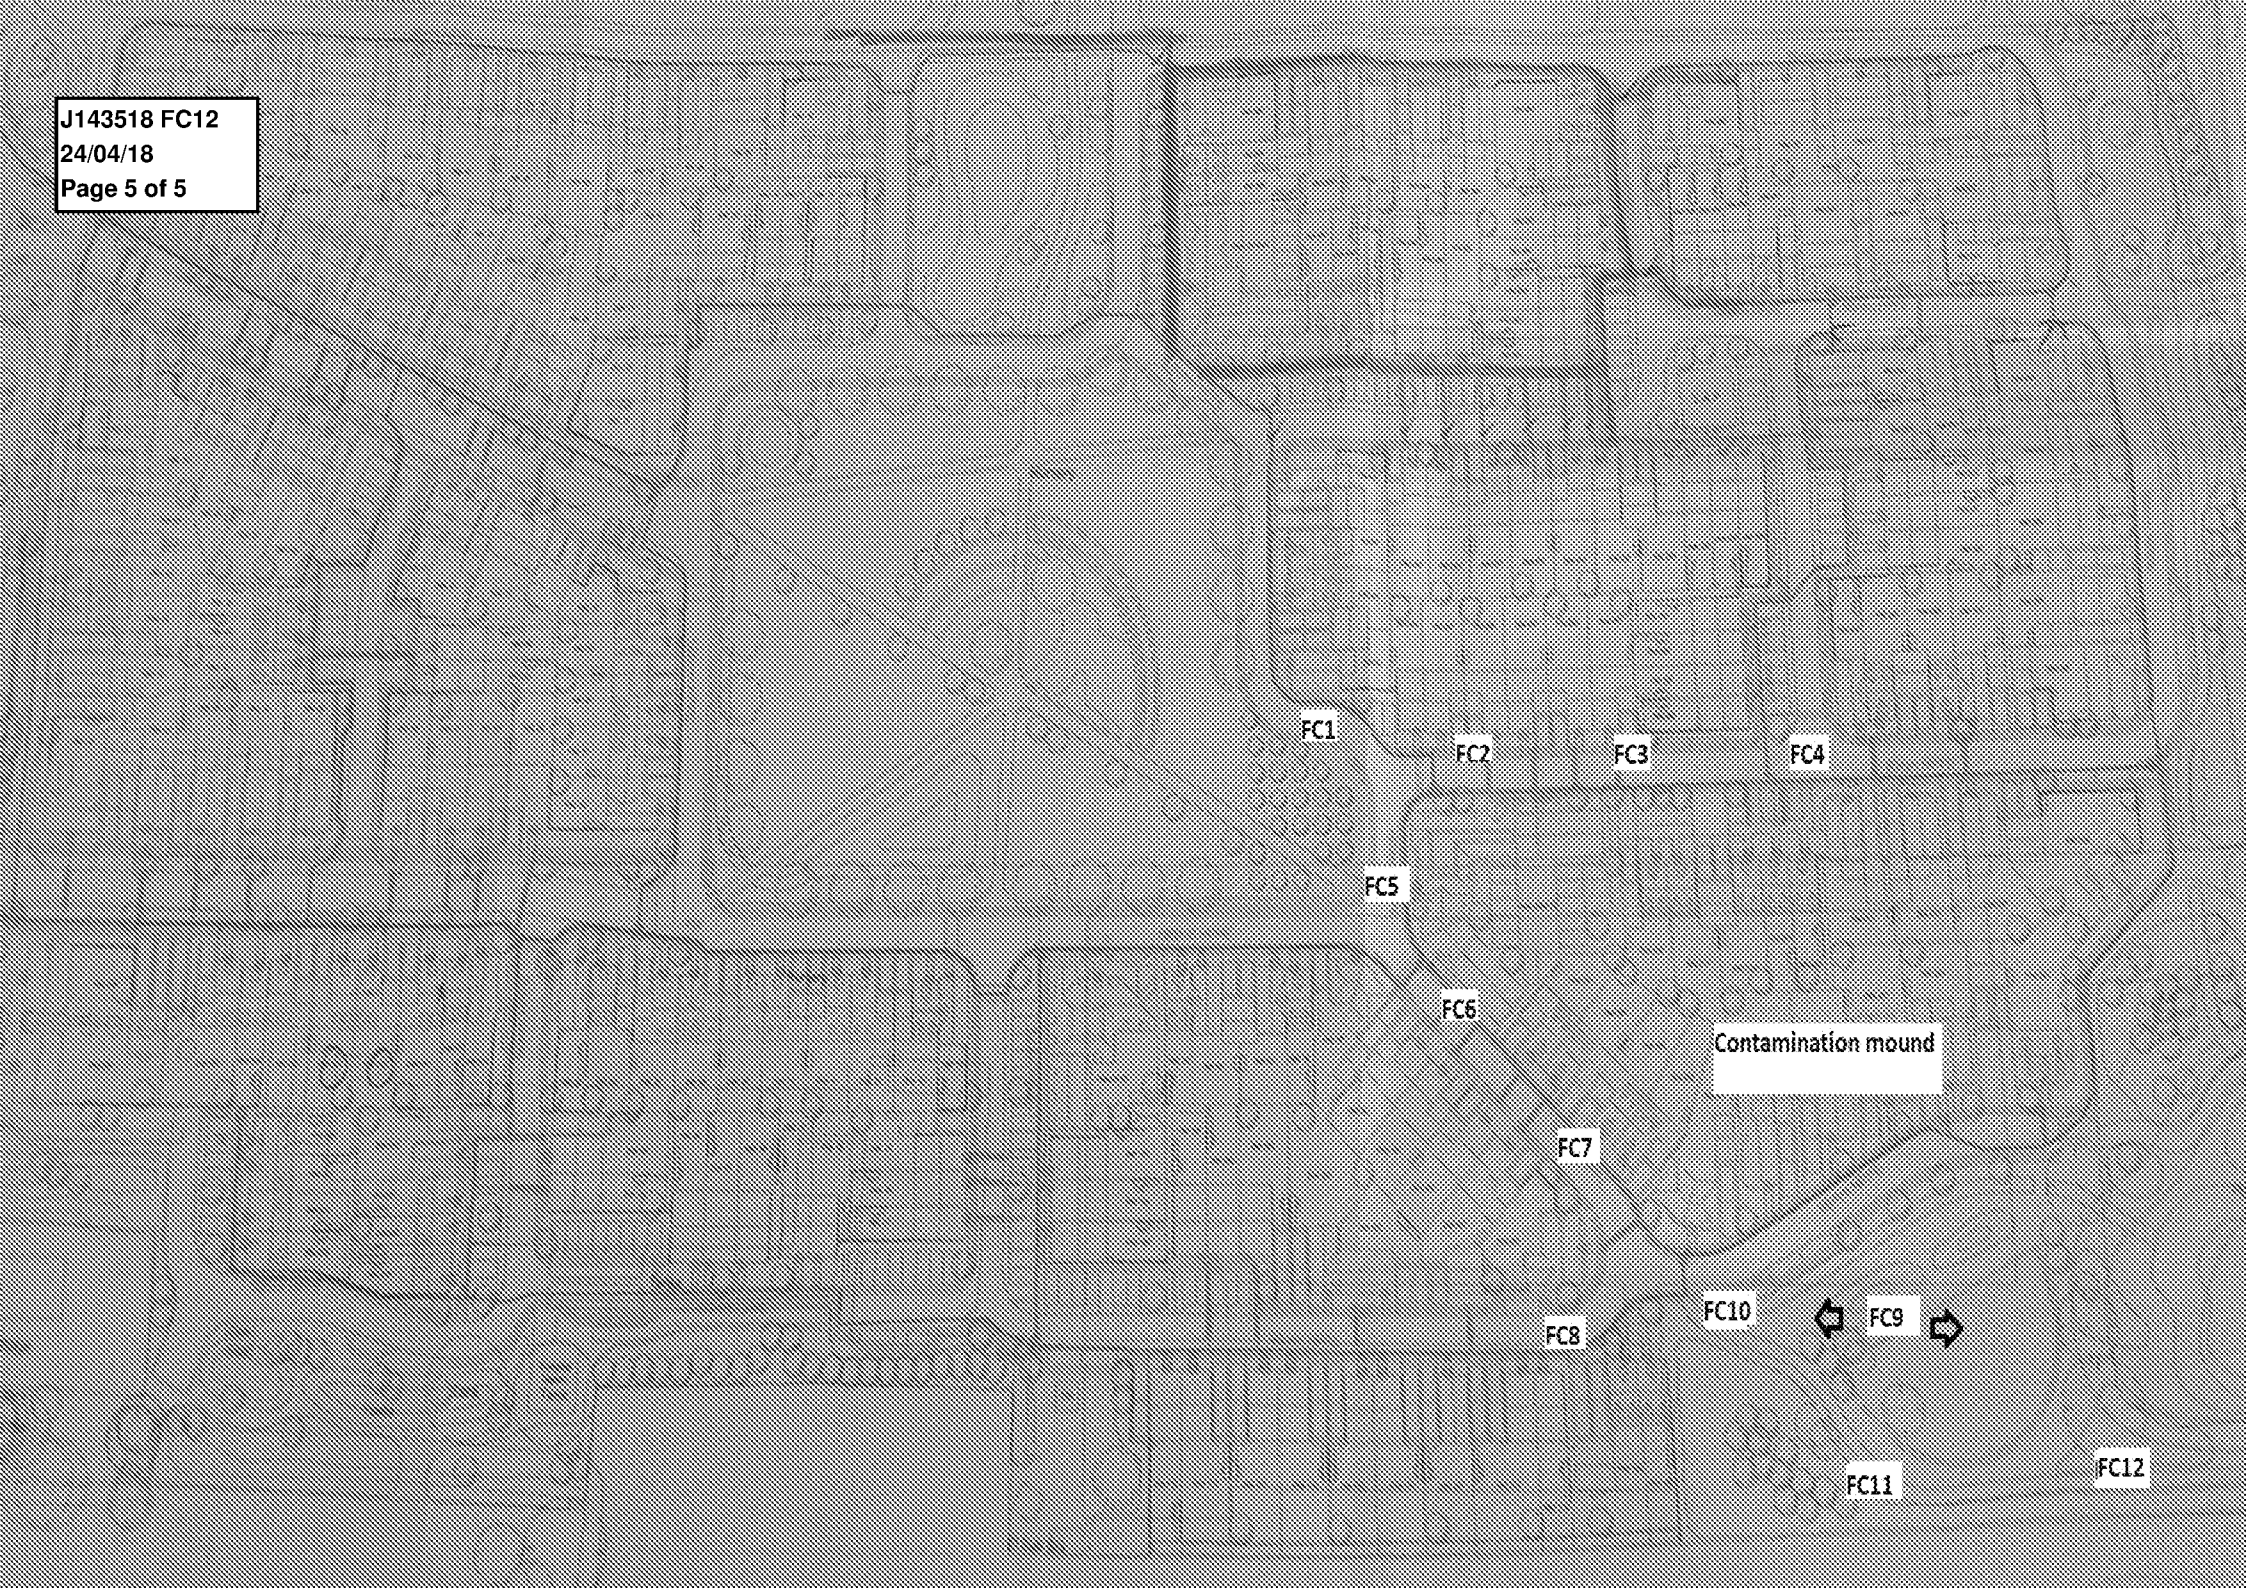

FC1

FC2

FC3

FC4

FC5

FC6

Contamination mound

FC7

FC8

FC10

FC9



FC11

FC12




ENVIROCHEM

Analytical Laboratories Ltd

12 The Gardens, Broadcut, Fareham
Hampshire. PO16 8SS

Fibre Counting Report



CLIENT: Blaze Construction

SITE ADDRESS: West End Nursery, Roundstone Lane, Angmering, Littlehampton, BN16 4AX

Our Ref: J143519 - FC12

Your Ref: N/A

SAMPLING PROTOCOL: Reassurance

SAMPLED BY: M Wagstaff

ANALYSED BY (if different):

DATE OF SAMPLING: 25/05/2018

DATE OF ANALYSIS (if different):

Filter No.	Pump	Head	Location	Time on	Time off	Flow (litres/min)			Volume (V) litres	Grats (n)	Fibres (N)	Calculation fibres/ml	Reported result fibres/ml
						Flow (start)	Flow (finish)	Flow (used)					
FC-1	ENV21	MW1	Location 1; on site road, near staff car park	09.02	10.02	8.0	8.0	8.0	480	200	2	0.001	<0.01
FC-2	RY2	MW2	Location 2; along side asbestos mound	09.02	10.02	8.0	8.0	8.0	480	200	1.5	0.001	<0.01
FC-3	50	MW3	Location 3; along side asbestos mound	09.04	10.04	8.0	8.0	8.0	480	200	3.5	0.002	<0.01
FC-4	ENV41	MW4	Location 4; along side asbestos mound	09.05	10.05	8.0	8.0	8.0	480	200	2	0.001	<0.01
FC-5	ENV21	MW1	Location 5; front of asbestos mound, near recycling area	10.31	11.31	8.0	8.0	8.0	480	200	3.5	0.002	<0.01
FC-6	RY2	MW2	Location 6; front of asbestos mound	10.32	11.32	8.0	8.0	8.0	480	200	2	0.001	<0.01

1. Unless otherwise stated, the detection limit is 0.01 fibres/ml.

3. Comments, observations and opinions are outside the scope of UKAS accreditation.

5. For clearance sampling, this report must be read in conjunction with the certificate of reoccupation.

2. Samples collected by the client are evaluated using information provided by the client.

4. Fibres were counted on membrane filter(s) in accordance with the HSE Guidance Note HSG 248.

Equipment Numbers:

Microscope: Meiji 10

Barometer: BTC 26

Stage Micrometer: WSM 13

Thermometer: BTC 26

Tally Counter: S/US

Flow Meter: FM22

Environment:

Temperature (°C): 16

Pressure (mb): 1016

Correction Factor (F): -

Diam. of dust deposit (D) (mm): 22.5

Test Slide (5 bands): Yes/No

W/B Grat diameter (µm): 100

Blank Filter

Head: 5

Graticules:

Fibres:

Place of Analysis:

Lab

On Site

Mob Lab RF11 PVK

Comments


Reassurance air monitoring during movement of asbestos earth from mound to hole within exclusion zone. Site located near to housing estate. See map for sampling locations. Results: satisfactory

SIGNATURE:

(on behalf of Envirochem)

ENVIROCHEM/FORMS/WORKSHEETS/02/ISSUE07/NOV06

PRINT NAME: M Wagstaff



ENVIROCHEM

Analytical Laboratories Ltd

12 The Gardens, Broadcut, Fareham
Hampshire. PO16 8SS

Fibre Counting Report



CLIENT: Blaze Construction

SITE ADDRESS: West End Nursery, Roundstone Lane, Angmering, Littlehampton, BN16 4AX

Our Ref: J143519 - FC12

Your Ref: N/A

SAMPLING PROTOCOL: Reassurance

SAMPLED BY: M Wagstaff

ANALYSED BY (if different):

DATE OF SAMPLING: 25/05/2018

DATE OF ANALYSIS (if different):

Filter No.	Pump	Head	Location	Time on	Time off	Flow (litres/min)			Volume (V) litres	Grats (n)	Fibres (N)	Calculation fibres/ml	Reported result fibres/ml
						Flow (start)	Flow (finish)	Flow (used)					
FC-7	50	MW3	Location 7; front of asbestos mound	10.34	11.34	8.0	8.0	8.0	480	200	0.5	0.001	<0.01
FC-8	ENV41	MW4	Location 8; front of in fill hole	10.34	11.34	8.0	8.0	8.0	480	200	1	0.001	<0.01
FC-10	ENV21	MW1	Location 9; next to asbestos waste skip	12.01	13.01	8.0	8.0	8.0	480	200	2	0.001	<0.01
FC-11	RY2	MW2	Location 10; within exclusion zone, opposite warehouses	12.02	13.02	8.0	8.0	8.0	480	200	3	0.002	<0.01
FC-12	50	MW3	Location 11; within exclusion zone, opposite warehouses	12.02	13.02	8.0	8.0	8.0	480	200	2	0.001	<0.01

1. Unless otherwise stated, the detection limit is 0.01 fibres/ml.

3. Comments, observations and opinions are outside the scope of UKAS accreditation.

5. For clearance sampling, this report must be read in conjunction with the certificate of reoccupation.

2. Samples collected by the client are evaluated using information provided by the client.

4. Fibres were counted on membrane filter(s) in accordance with the HSE Guidance Note HSG 248.

Equipment Numbers:

Microscope: Meiji 10

Barometer: BTC 26

Stage Micrometer: WSM 13

Thermometer: BTC 26

Tally Counter: S/US

Flow Meter: FM22

Environment:

Temperature (°C): 19

Pressure (mb): 1015

Correction Factor (F): -

Blank Filter

Head: 5

Graticules:

Fibres:

Diam. of dust deposit (D) (mm): 22.5

Test Slide (5 bands): Yes/No

W/B Grat diameter (µm): 100

Place of Analysis:

Lab

On Site

Mob Lab RF11 PVK

Comments


Reassurance air monitoring during movement of asbestos earth from mound to hole within exclusion zone. See map for sampling locations.. Results: satisfactory

SIGNATURE:

(on behalf of Envirochem by an authorised signatory)

ENVIROCHEM/FORMS/WORKSHEETS/02/ISSUE07/NOV06

PRINT NAME: M Wagstaff



ENVIROCHEM

Analytical Laboratories Ltd

12 The Gardens, Broadcut, Fareham
Hampshire. PO16 8SS

Fibre Counting Report



CLIENT: Blaze Construction

SITE ADDRESS: West End Nursery, Roundstone Lane, Angmering, Littlehampton, BN16
4AX

Our Ref: J143519 - FC12

Your Ref:

SAMPLING PROTOCOL: Personal

SAMPLED BY: M Wagstaff

ANALYSED BY (if different):

DATE OF SAMPLING: 25/05/2018

DATE OF ANALYSIS (if different):

Filter No.	Pump	Head	Location	Time on	Time off	Flow (litres/min)			Volume (V) litres	Grats (n)	Fibres (N)	Calculation fibres/ml	Reported result fibres/ml
						Flow (start)	Flow (finish)	Flow (used)					
FC-9	0236	MW5	On operative Andy Ryder, in roller cab	11.59	13.10	3.0	3.0	3.0	213	100	2.5	0.006	<0.04

1. Unless otherwise stated, the detection limit is 0.01 fibres/ml.

3. Comments, observations and opinions are outside the scope of UKAS accreditation.

5. For clearance sampling, this report must be read in conjunction with the certificate of reoccupation.

2. Samples collected by the client are evaluated using information provided by the client.

4. Fibres were counted on membrane filter(s) in accordance with the HSE Guidance Note HSG 248.

Equipment Numbers:

Microscope: Meiji 10

Barometer: BTC 25

Stage Micrometer: WSM 13

Thermometer: BTC 25

Tally Counter: BTC 25

Environment:

Temperature (°C): 18

Pressure (mb): 1014

Correction Factor (F): -

Blank Filter

Head: MW5

Graticules: -

Fibres: -

Place of Analysis:

Lab RF11 PVK

On Site

Mob Lab

Comments:

muck away of contaminated mound to hole. Operative operating a roller, leveling out contaminated soil within designated in fill hole.

SIGNATURE
(on behalf of)
ENVIROCHEM

PRINT NAME: M Wagstaff



ENVIROCHEM

Analytical Laboratories Ltd

12 The Gardens
Broadcut, Fareham
Hampshire. PO16 8SS


Ref No: J143519 FC12

Personal Monitoring Observation Form

Type & Scale of work:	Remediation ground works of former nursery		
Purpose of monitoring: (select all that apply)			
Checking effectiveness of methods	☒	Providing data for personal exposure records	☒
		Confirming appropriate RPE being worn	☒
General control measures in use: (select all that apply)			
Enclosure (under negative pressure)	☐	Partial enclosure	☐
Gel/Foam	☐	Shadow vacuum	☐
Other (Please specify):		Decontamination unit, exclusion zone	
Injection ☐			
Spraying ☐			
Sampling Details:			
Operative's Name/job title:	Andy Ryder, roller driver		
Type of RPE worn:	N/A		
Length of time Operative is / has been exposed:	Approximately 4.5 hours		
Asbestos Product(s) being removed including detail of fixings, size, surface treatment and tools used during works and dust suppression methods being used by operative:			
Asbestos materials identified within the soil matrix			
General Description of activities being undertaken during sampling:			
Movement of asbestos containing earth material to a designated in fill hole. Earth is loaded onto a dumper by a digger and transported within an exclusion zone.			
Is the asbestos in good or bad condition (as per the method statements description):			
Degraded			
Other factors which may affect the result (eg approximate size of the enclosure, external location, etc):			
External location, rainfall during sampling			
Time weighted average (4 Hour TWA) = $\frac{(F1 \times T1) + (F2 \times T2) + \dots + (Fn \times Tn)}{4}$			
Not required			
Where F = concentration f/ml			
T = Time for that exposure, hours and minutes, 1 hr 30 mins = 1.5			
Notes: The sampling period must be sufficient to ensure it is fully representative of the work. Sampling periods should be for 4 hours to access the control limit or for the duration of a specific task for shorter duration activities. A minimum sample time of 10 minutes is required to assess the Short Term Exposure Limit. In general, the client is to specify their requirements depending on previous personal air sampling carried out. All information was collected from the method statement or / and the site contact and this information is deemed as accurate / correct for the purpose of this report.			

Analyst: M Wagstaff

Signature:

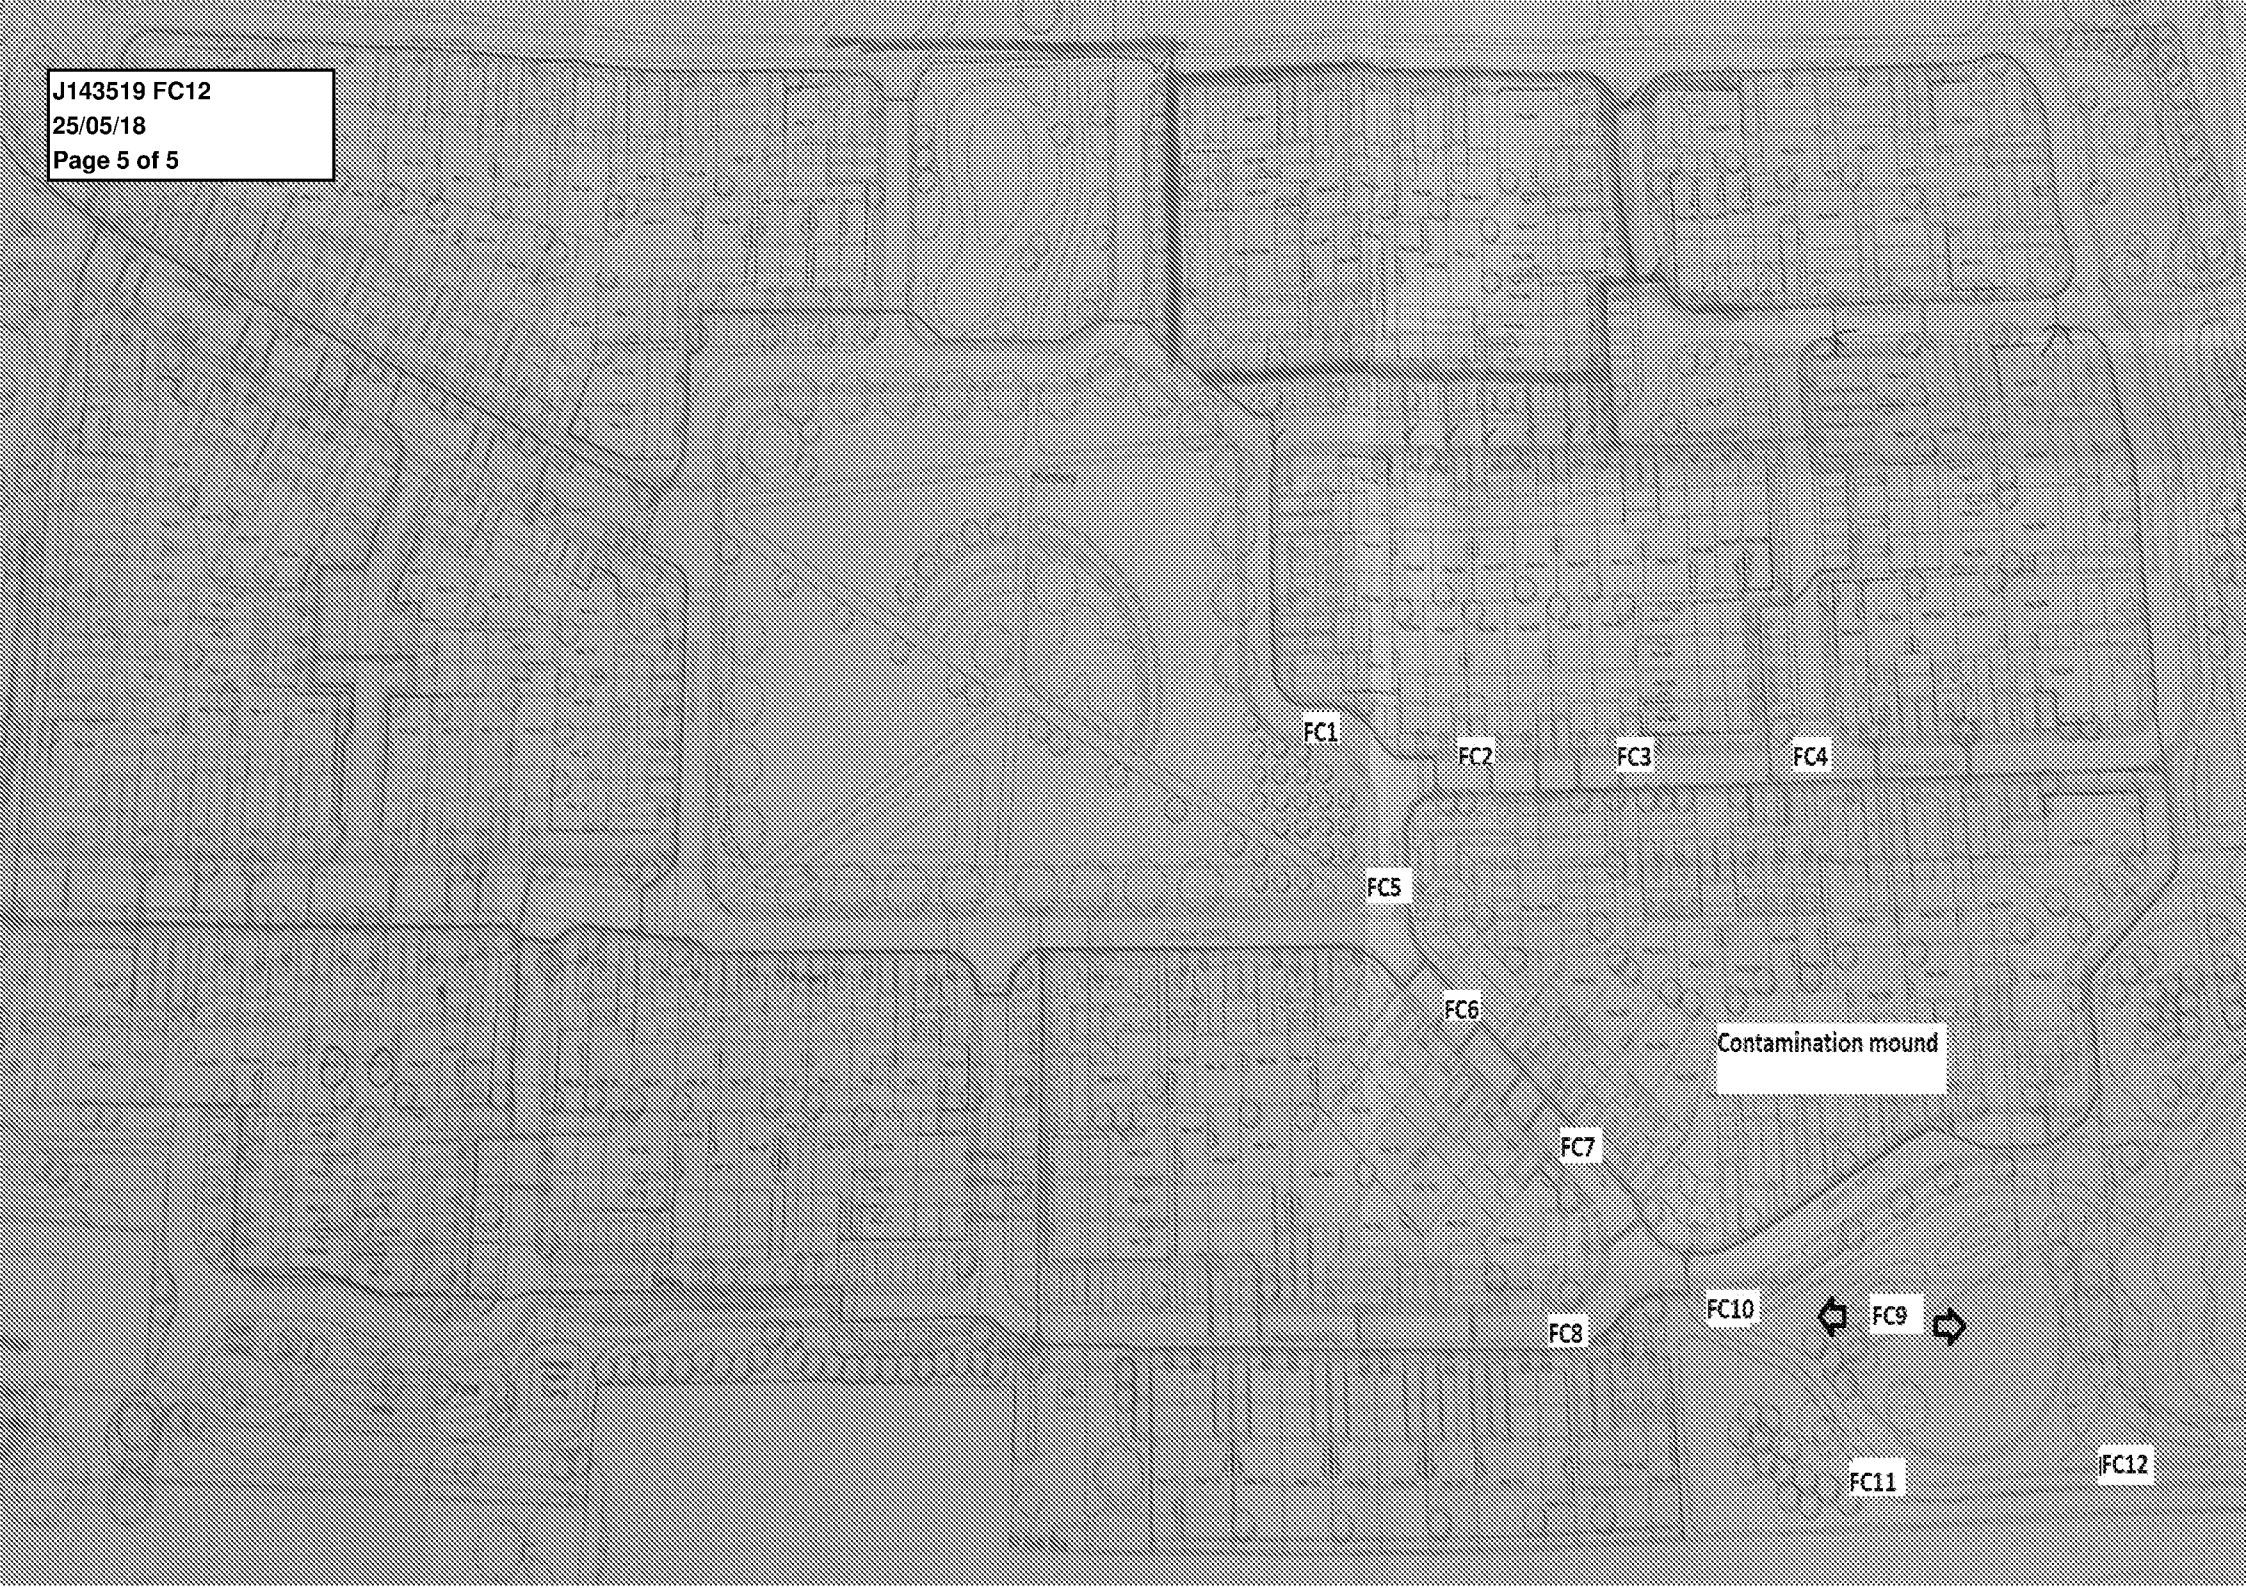

FC1

FC2

FC3

FC4

FC5

FC6

FC7

FC8

FC10

FC9



FC11

FC12

Contamination mound




ENVIROCHEM

Analytical Laboratories Ltd

12 The Gardens, Broadcut, Fareham
Hampshire. PO16 8SS

Fibre Counting Report



CLIENT: Blaze Construction

SITE ADDRESS: West End Nursery, Roundstone Lane, Angmering, Westhampton, BN16
4AX

Our Ref: J145331 - FC12

Your Ref: N/A

SAMPLING PROTOCOL: Reassurance

SAMPLED BY: M Wagstaff

ANALYSED BY (if different):

DATE OF SAMPLING: 26/05/2018

DATE OF ANALYSIS (if different):

Filter No.	Pump	Head	Location	Time on	Time off	Flow (litres/min)			Volume (V) litres	Grats (n)	Fibres (N)	Calculation fibres/ml	Reported result fibres/ml
						Flow (start)	Flow (finish)	Flow (used)					
FC-1	ENV21	MW1	Location 1; next to site welfare and main site road	09.14	09.44	16.0	16.0	16.0	480	200	2.5	0.001	<0.01
FC-2	RY2	MW2	Location 2; along side asbestos mound	09.14	09.44	16.0	16.0	16.0	480	200	2	0.001	<0.01
FC-3	50	MW3	Location 3; along side asbestos mound	09.16	09.46	16.0	16.0	16.0	480	200	1	0.001	<0.01
FC-4	ENV41	MW4	Location 4; along side asbestos mound	09.17	09.47	16.0	6.0	16.0	480	200	3.5	0.002	<0.01
FC-5	61	MW5	Location 5; along side asbestos mound	09.17	09.47	16.0	16.0	16.0	480	200	4	0.002	<0.01
FC-6	RY2	MW2	Location 6;	10.04	10.34	16.0	16.0	16.0	480	200	1.5	0.001	<0.01

1. Unless otherwise stated, the detection limit is 0.01 fibres/ml.

3. Comments, observations and opinions are outside the scope of UKAS accreditation.

5. For clearance sampling, this report must be read in conjunction with the certificate of reoccupation.

2. Samples collected by the client are evaluated using information provided by the client.

4. Fibres were counted on membrane filter(s) in accordance with the HSE Guidance Note HSG 248.

Equipment Numbers:

Microscope: Meiji 10

Barometer: BTC 26

Stage Micrometer: WSM 13

Thermometer: BTC 26

Tally Counter: S/US

Flow Meter: FM22

Environment:

Temperature (°C): 18

Pressure (mb): 1015

Correction Factor (F): -

Diam. of dust deposit (D) (mm): 22.5

Test Slide (5 bands): Yes/No

W/B Grate diameter (µm): 100

Blank Filter

Head: 5

Graticules:

Fibres:

Place of Analysis:

Lab

On Site

Mob Lab RF11 PVK

Comments

Reassurance air monitoring during on going ground works. Site located near to housing estate. See map for sampling locations. Results: satisfactory

SIGNATURE:

(on behalf of Envirochem by an authorised signatory)

ENVIROCHEM/FORMS/WORKSHEETS/02/ISSUE07/NOV06

PRINT NAME: M Wagstaff



ENVIROCHEM

Analytical Laboratories Ltd

12 The Gardens, Broadcut, Fareham
Hampshire. PO16 8SS

Fibre Counting Report



CLIENT: Blaze Construction

SITE ADDRESS: West End Nursery, Roundstone Lane, Angmering, Littlehampton, BN16
4AX

Our Ref: J145331 - FC12

Your Ref: N/A

SAMPLING PROTOCOL: Reassurance

SAMPLED BY: M Wagstaff

ANALYSED BY (if different):

DATE OF SAMPLING: 26/05/2018

DATE OF ANALYSIS (if different):

Filter No.	Pump	Head	Location	Time on	Time off	Flow (litres/min)			Volume (V) litres	Grats (n)	Fibres (N)	Calculation fibres/ml	Reported result fibres/ml
						Flow (start)	Flow (finish)	Flow (used)					
FC-7	RY2	MW2	Location 7; Front of asbestos mound, along road	10.04	10.34	16.0	16.0	16.0	480	200	2	0.001	<0.01
FC-8	50	MW3	Location 8; Front of asbestos mound, along road	10.05	10.35	16.0	16.0	16.0	480	200	2	0.001	<0.01
FC-9	ENV41	MW4	Location 9; Front of asbestos mound, along road	10.06	10.36	16.0	16.0	16.0	480	200	3	0.002	<0.01
FC-10	RY2	MW2	Location 10; Next to asbestos waste skip	10.47	11.17	16.0	16.0	16.0	480	200	2.5	0.001	<0.01
FC-11	50	MW3	Location 11; within exclusion zone, adjacent warehouses	10.48	11.18	16.0	16.0	16.0	480	200	3	0.002	<0.01
FC-12	ENV41	MW4	Location 12; within exclusion zone, adjacent warehouses	10.48	11.18	16.0	16.0	16.0	480	200	3	0.002	<0.01

1. Unless otherwise stated, the detection limit is 0.01 fibres/ml.

3. Comments, observations and opinions are outside the scope of UKAS accreditation.

5. For clearance sampling, this report must be read in conjunction with the certificate of reoccupation.

2. Samples collected by the client are evaluated using information provided by the client.

4. Fibres were counted on membrane filter(s) in accordance with the HSE Guidance Note HSG 248.

Equipment Numbers:

Microscope: Meiji 10

Barometer: BTC 26

Stage Micrometer: WSM 13

Thermometer: BTC 26

Tally Counter: S/US

Flow Meter: FM22

Environment:

Temperature (°C): 21

Pressure (mb): 1015

Correction Factor (F): -

Diam. of dust deposit (D) (mm): 22.5

Test Slide (5 bands): Yes/No

W/B Grate diameter (µm): 100

Blank Filter

Head: 5

Graticules:

Fibres:

Place of Analysis:

Lab

On Site

Mob Lab RF11 PVK

Comments


Reassurance air monitoring during on going ground works. Site located near to housing estate. See map for sampling locations. Results: satisfactory

SIGNATURE:

(on behalf of Envirochem)

ENVIROCHEM/FORMS/WORKSHEETS/02/ISSUE07/NOV06

PRINT NAME: M Wagstaff

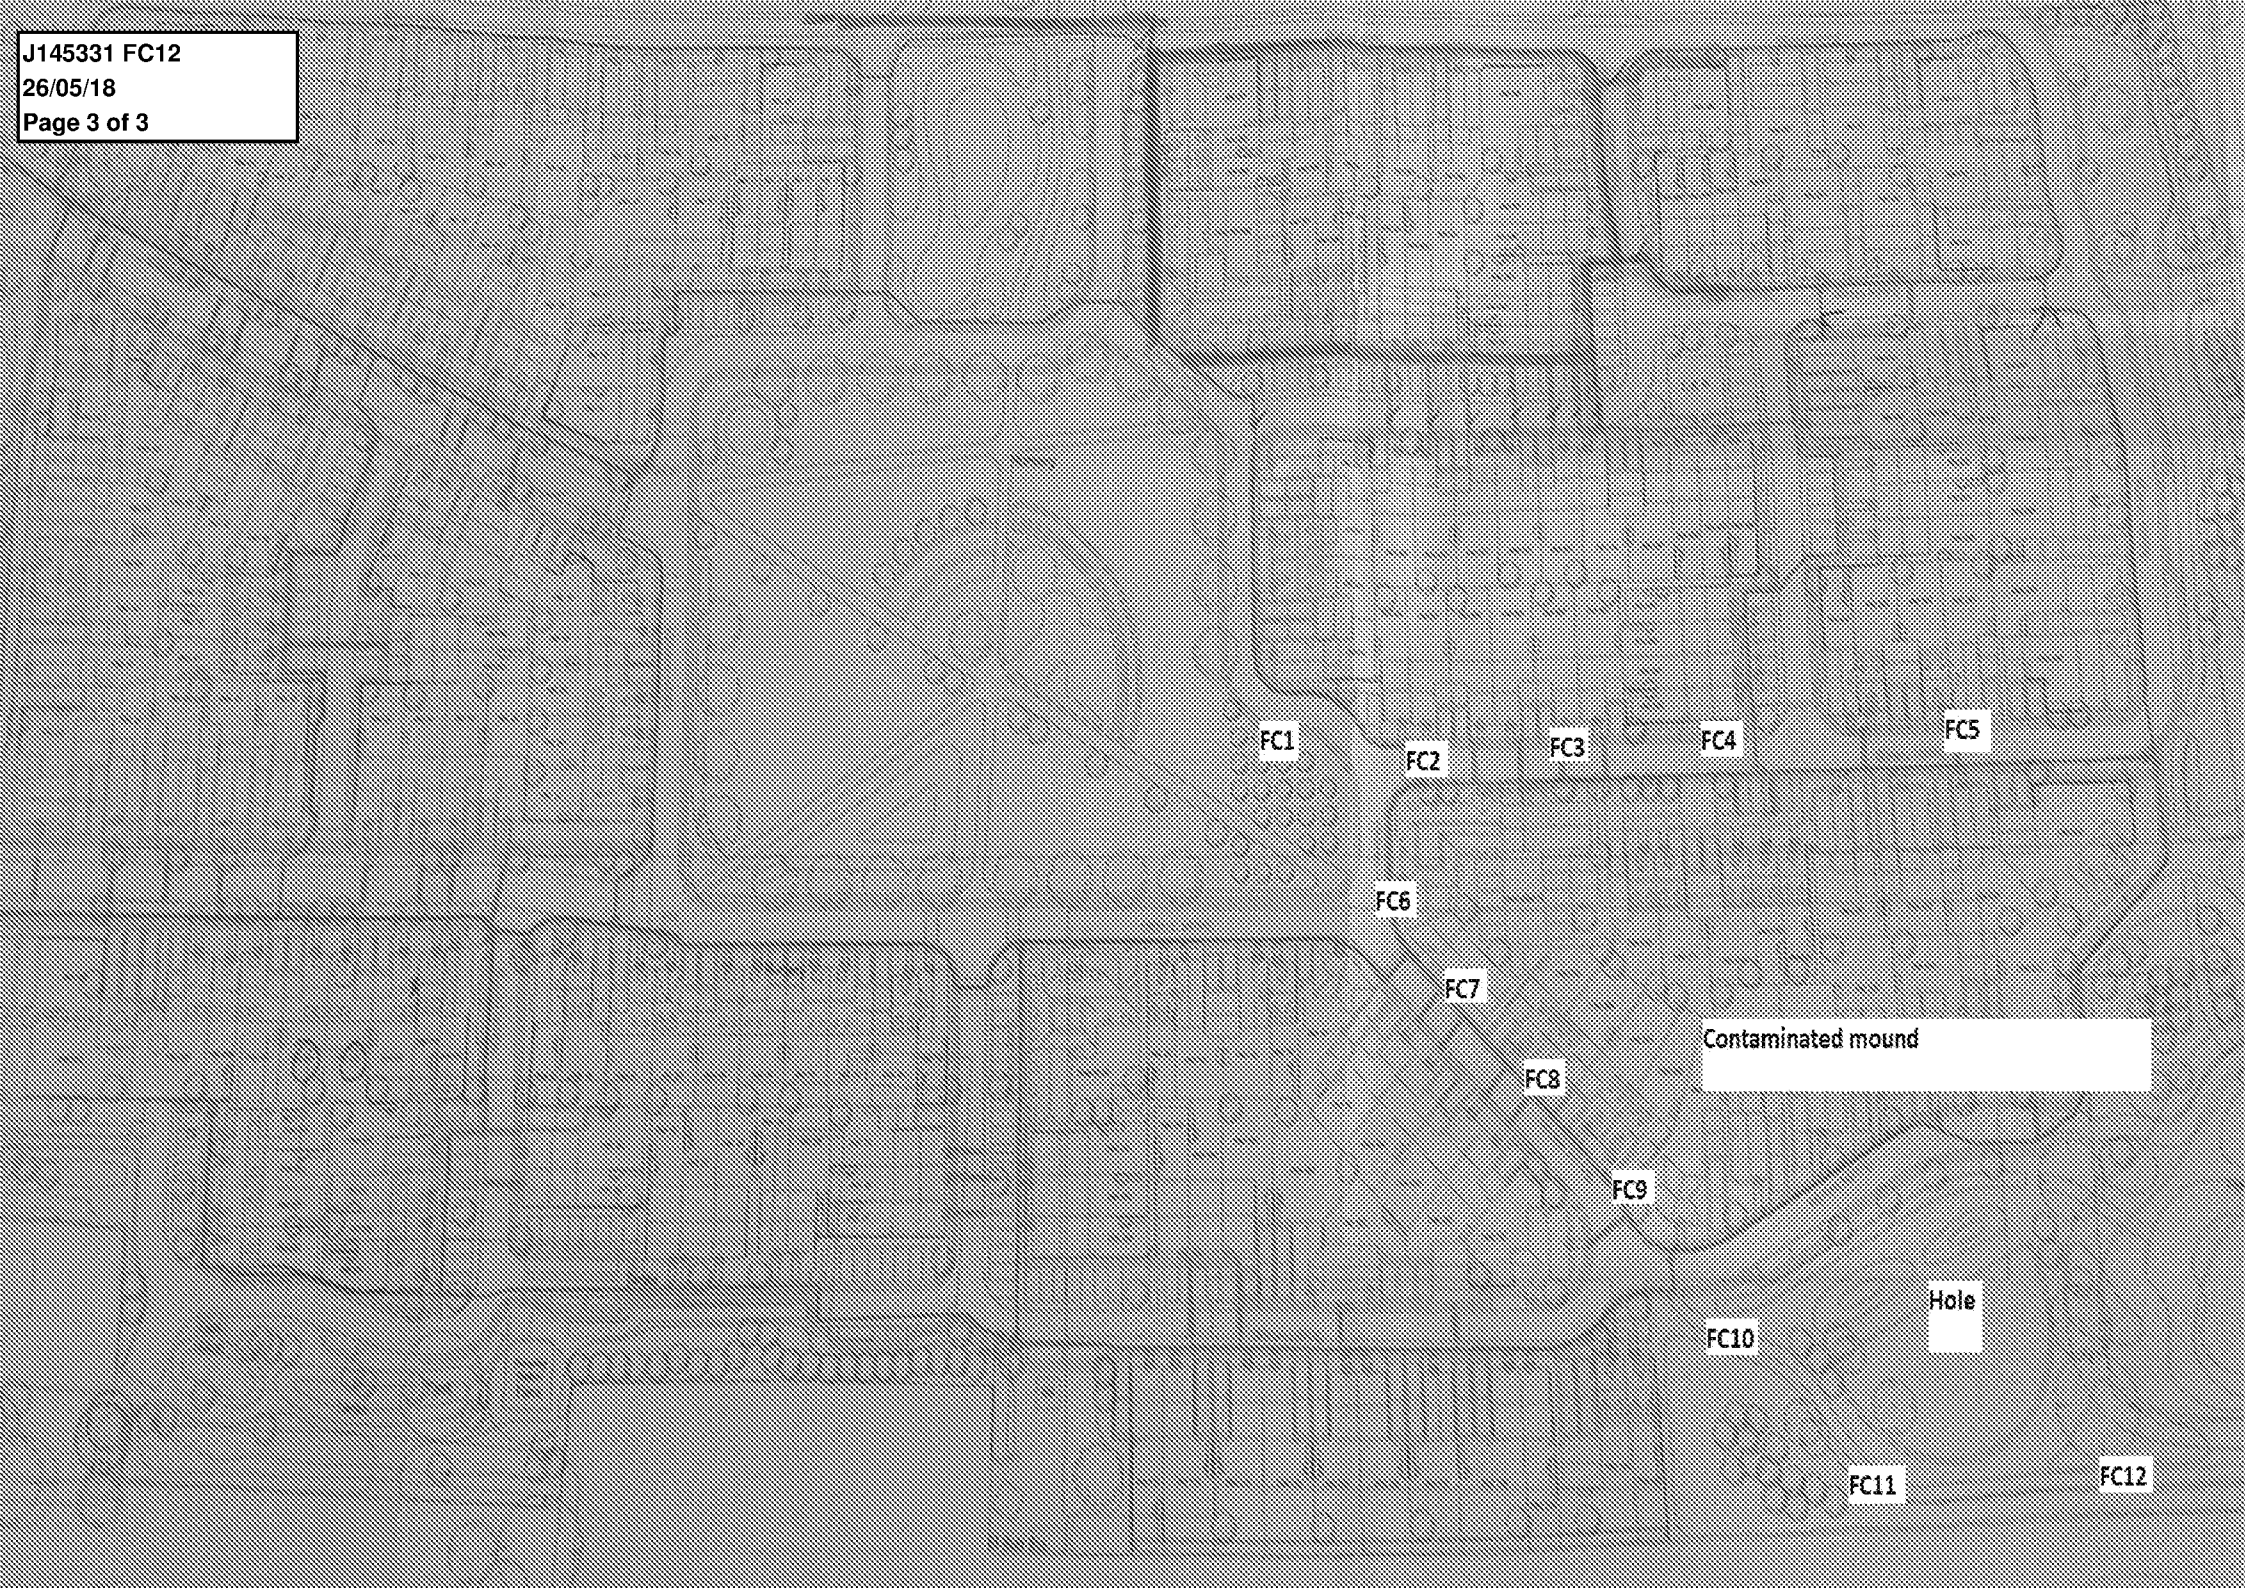

FC1

FC2

FC3

FC4

FC5

FC6

FC7

FC8

FC9

FC10

FC11

FC12

Contaminated mound

Hole




ENVIROCHEM

Analytical Laboratories Ltd

12 The Gardens, Broadcut, Fareham
Hampshire. PO16 8SS

Fibre Counting Report



CLIENT: Blaze Construction

SITE ADDRESS: West End Nursery, Roundstone Lane, Angmering, Littlehampton, BN16
4AX

Our Ref: J143520 - FC12

Your Ref: N/A

SAMPLING PROTOCOL: Reassurance

SAMPLED BY: M Wagstaff

ANALYSED BY (if different):

DATE OF SAMPLING: 29/05/2018

DATE OF ANALYSIS (if different):

Filter No.	Pump	Head	Location	Time on	Time off	Flow (litres/min)			Volume (V) litres	Grats (n)	Fibres (N)	Calculation fibres/ml	Reported result fibres/ml
						Flow (start)	Flow (finish)	Flow (used)					
FC-1	ENV21	MW1	Location 1; on site road, near staff car park	09.12	10.12	8.0	8.0	8.0	480	200	1	0.001	<0.01
FC-2	RY2	MW2	Location 2; along side asbestos mound	09.13	10.13	8.0	8.0	8.0	480	200	0.5	0.001	<0.01
FC-3	50	MW3	Location 3; along side asbestos mound	09.16	10.16	8.0	8.0	8.0	480	200	2	0.001	<0.01
FC-4	ENV41	MW4	Location 4; along side asbestos mound	09.16	10.16	8.0	8.0	8.0	480	200	1	0.001	<0.01
FC-5	ENV21	MW1	Location 5; front of asbestos mound, near recycling area	10.43	11.43	8.0	8.0	8.0	480	200	2	0.001	<0.01
FC-6	RY2	MW2	Location 6; front of asbestos mound	10.44	11.44	8.0	8.0	8.0	480	200	2	0.001	<0.01

1. Unless otherwise stated, the detection limit is 0.01 fibres/ml.

3. Comments, observations and opinions are outside the scope of UKAS accreditation.

5. For clearance sampling, this report must be read in conjunction with the certificate of reoccupation.

2. Samples collected by the client are evaluated using information provided by the client.

4. Fibres were counted on membrane filter(s) in accordance with the HSE Guidance Note HSG 248.

Equipment Numbers:

Microscope: Meiji 10

Stage Micrometer: WSM 13

Tally Counter: S/US

Barometer: BTC 26

Thermometer: BTC 26

Flow Meter: FM22

Environment:

Temperature (°C): 13

Pressure (mb): 1014

Correction Factor (F): -

Diam. of dust deposit (D) (mm): 22.5

Test Slide (5 bands): Yes/No

W/B Grat diameter (µm): 100

Blank Filter

Head: 5

Graticules:

Fibres:

Place of Analysis:

Lab

On Site

Mob Lab RF11 PVK

Comments Reassurance air monitoring during limited ground works due to heavy rainfall. Soil saturated and little to no dust present. See map for sampling locations. Results: satisfactory

SIGNATURE:

(on behalf of Envirochem)

ENVIROCHEM/FORMS/WORKSHEETS/02/ISSUE07/NOV06

PRINT NAME: M Wagstaff



ENVIROCHEM

Analytical Laboratories Ltd

12 The Gardens, Broadcut, Fareham
Hampshire. PO16 8SS

Fibre Counting Report



CLIENT: Blaze Construction

SITE ADDRESS: West End Nursery, Roundstone Lane, Angmering, Littlehampton, BN16
4AX

Our Ref: J143520 - FC12

Your Ref: N/A

SAMPLING PROTOCOL: Reassurance

SAMPLED BY: M Wagstaff

ANALYSED BY (if different):

DATE OF SAMPLING: 29/05/2018

DATE OF ANALYSIS (if different):

Filter No.	Pump	Head	Location	Time on	Time off	Flow (litres/min)			Volume (V) litres	Grats (n)	Fibres (N)	Calculation fibres/ml	Reported result fibres/ml
						Flow (start)	Flow (finish)	Flow (used)					
FC-7	50	MW3	Location 7; Front of asbestos mound, along road	10.46	11.46	16.0	16.0	16.0	480	200	0.5	0.001	<0.01
FC-8	ENV41	MW4	Location 8; Front of asbestos mound, along road	10.46	11.46	16.0	16.0	16.0	480	200	1	0.001	<0.01
FC-9	ENV21	MW1	Location 9; Opposite Haskins store	12.07	13.07	16.0	16.0	16.0	480	200	3.5	0.002	<0.01
FC-10	RY2	MW2	Location 10; Next to asbestos waste skip	12.08	13.08	16.0	16.0	16.0	480	200	2	0.001	<0.01
FC-11	50	MW3	Location 11; within exclusion zone, adjacent warehouses	12.09	13.09	16.0	16.0	16.0	480	200	1.5	0.001	<0.01
FC-12	ENV41	MW4	Location 12; within exclusion zone, adjacent warehouses	12.10	13.10	16.0	16.0	16.0	480	200	1.5	0.001	<0.01

1. Unless otherwise stated, the detection limit is 0.01 fibres/ml.

3. Comments, observations and opinions are outside the scope of UKAS accreditation.

5. For clearance sampling, this report must be read in conjunction with the certificate of reoccupation.

2. Samples collected by the client are evaluated using information provided by the client.

4. Fibres were counted on membrane filter(s) in accordance with the HSE Guidance Note HSG 248.

Equipment Numbers:

Microscope: Meiji 10

Barometer: BTC 26

Stage Micrometer: WSM 13

Thermometer: BTC 26

Tally Counter: S/US

Flow Meter: FM22

Environment:

Temperature (°C): 14

Pressure (mb): 1015

Correction Factor (F): -

Diam. of dust deposit (D) (mm): 22.5

Test Slide (5 bands): Yes/No

W/B Gral diameter (µm): 100

Blank Filter

Head: 5

Graticules:

Fibres:

Place of Analysis:

Lab

On Site

Mob Lab RF11 PVK


Comments: Reassurance air monitoring during limited ground works due to heavy rainfall. Soil saturated and little to no dust present. See map for sampling locations. Results: satisfactory

SIGNATURE:

(on behalf of Envirochem)

ENVIROCHEM/FORMS/WORKSHEETS/02/ISSUE07/NOV06

PRINT NAME: M Wagstaff

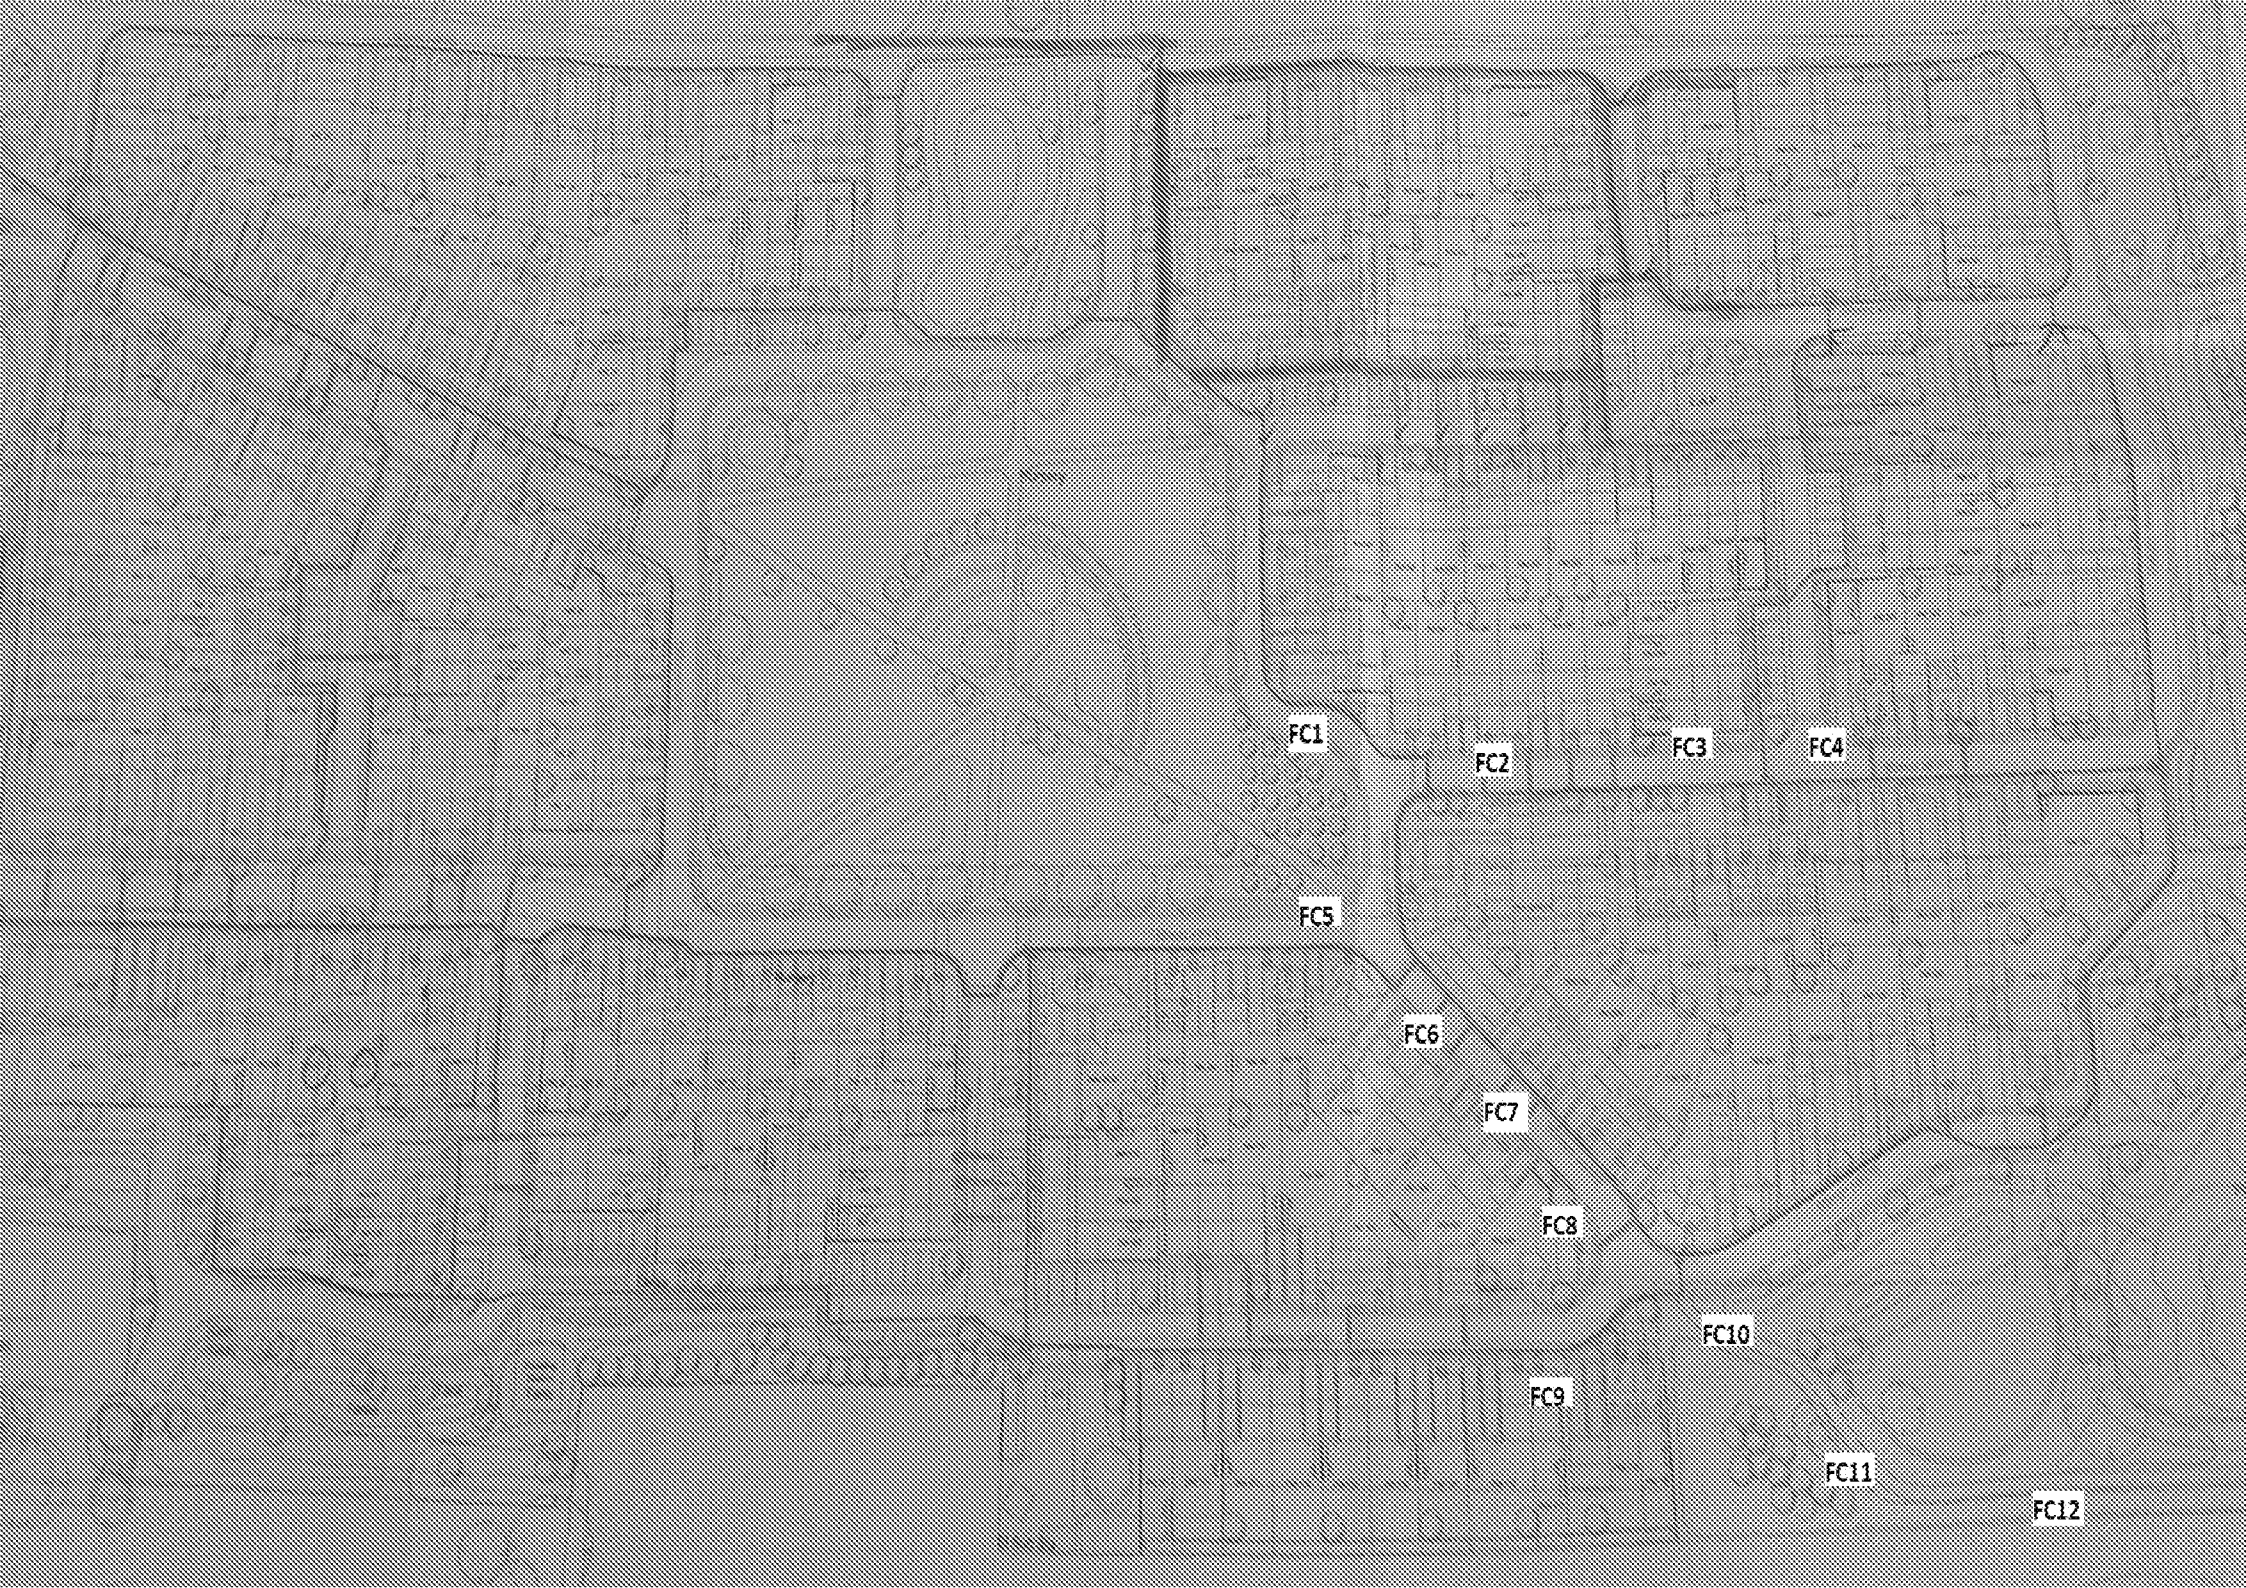

FC1

FC2

FC3

FC4

FC5

FC6

FC7


FC8

FC10

FC9

FC11

FC12




ENVIROCHEM

Analytical Laboratories Ltd

12 The Gardens, Broadcut, Fareham
Hampshire. PO16 8SS

Fibre Counting Report



CLIENT: Blaze Construction

SITE ADDRESS: West End Nursery, Roundstone Lane, Angmering, Littlehampton, BN16 4AX

Our Ref: J143521 - FC12

Your Ref: N/A

SAMPLING PROTOCOL: Reassurance

SAMPLED BY: M Wagstaff

ANALYSED BY (if different):

DATE OF SAMPLING: 30/05/2018

DATE OF ANALYSIS (if different):

Filter No.	Pump	Head	Location	Time on	Time off	Flow (litres/min)			Volume (V) litres	Grats (n)	Fibres (N)	Calculation fibres/ml	Reported result fibres/ml
						Flow (start)	Flow (finish)	Flow (used)					
FC-1	ENV21	MW1	Location 1; on site road, near staff car park	09.03	10.03	8.0	8.0	8.0	480	200	1.5	0.001	<0.01
FC-2	RY2	MW2	Location 2; along side asbestos mound	09.04	10.04	8.0	8.0	8.0	480	200	2.5	0.001	<0.01
FC-3	50	MW3	Location 3; along side asbestos mound	09.06	10.06	8.0	8.0	8.0	480	200	2	0.001	<0.01
FC-4	ENV41	MW4	Location 4; along side asbestos mound	09.06	10.06	8.0	8.0	8.0	480	200	1	0.001	<0.01
FC-5	ENV21	MW1	Location 5; front of asbestos mound, near recycling area	10.30	11.30	8.0	8.0	8.0	480	200	1	0.001	<0.01
FC-6	RY2	MW2	Location 6; front of asbestos mound	10.30	11.30	8.0	8.0	8.0	480	200	1.5	0.001	<0.01

1. Unless otherwise stated, the detection limit is 0.01 fibres/ml.

3. Comments, observations and opinions are outside the scope of UKAS accreditation.

5. For clearance sampling, this report must be read in conjunction with the certificate of reoccupation.

2. Samples collected by the client are evaluated using information provided by the client.

4. Fibres were counted on membrane filter(s) in accordance with the HSE Guidance Note HSG 248.

Equipment Numbers:

Microscope: Meiji 10

Barometer: BTC 26

Stage Micrometer: WSM 13

Thermometer: BTC 26

Tally Counter: S/US

Flow Meter: FM22

Environment:

Temperature (°C): 17

Pressure (mb): 1011

Correction Factor (F): -

Diam. of dust deposit (D) (mm): 22.5

Test Slide (5 bands): Yes/No

W/B Grate diameter (µm): 100

Blank Filter

Head: 5

Graticules:

Fibres:

Place of Analysis:

Lab

On Site

Mob Lab RF11 PVK

Comments

Reassurance air monitoring during ongoing ground works. Soil saturated and little to no dust present. See map for sampling locations. Results: satisfactory

SIGNATURE:

(on behalf of Envirochem)

ENVIROCHEM/FC

PRINT NAME: M Wagstaff

V06