

For traditional buildings



ON WINDOWS
AND FLASHINGS



CONSERVATION ROOF WINDOWS

When planning details that a window of traditional appearance is required, Conservation Roof Windows should be considered. All our Conservation Roof Windows have the technically superior features of a VELUX Roof Window in a traditional black conservation style. And, no matter what type of glazing you choose, you'll have the added benefit of energy efficiency and all the features you'd expect.

- Available in either Centre-Pivot or Top-Hung.
- Black external profiles and glazing bar. RAL colour 9005.
- Recessed installation for slate and tiled roofs.
- Other sizes and glazing options available – please contact VELUX for more details.
- Top-Hung Windows listed below are suitable for emergency escape.

CENTRE-PIVOT




Recessed into slate	20°–90°
Plain tiles	25°–90°
Tiles	15°–90°
Recessed into tiles	20°–90°

TOP-HUNG



Recessed into slate	20°–55°
Plain tiles	25°–55°
Tiles	15°–55°
Recessed into tiles	20°–55°

For roof pitches of 55°–75°, please specify special springs when ordering.



Conservation Roof Windows Prices excluding VAT from 1st Feb 2014

(Other sizes of Conservation Roof Windows are available subject to lead times.)

External frame size (nominal w x h) cm

Code	Description	55x98	55x118	66x118	78x118	78x140	134x98
		CK04	CK06	FK06	MK06	MK08	UK04

Packages Include: GGL Centre-Pivot or GPL Top-Hung Roof Window with glazing bar, flashing, Insulation Collar (BDX) and Underfelt Collar (BFX).

Centre-Pivot Roof Windows, pine. Toughened outer pane (–50). U-value 1.3 W/m²K.

GGL SD5N1	GGL 3550 Roof Window + EDN Recessed Flashing for slate up to 8mm thick (min 20° roof pitch)	£416	£432	£468	£531	£571	£690
GGL SD5P1	GGL 3550 Roof Window + EDP Flashing for plain tiles up to 15mm thick (min 25° roof pitch)	£375	£391	£422	£484	£520	£633
GGL SD5W1	GGL 3550 Roof Window + EDW Flashing for tiles up to 120mm in profile (min 15° roof pitch)	£391	£407	£440	£502	£538	£657
GGL SD5J1	GGL 3550 Roof Window + EDJ Recessed Flashing for tiles up to 90mm in profile (min 20° roof pitch)	£416	£432	£468	£531	£571	£690

Top-Hung Roof Windows, pine. Toughened outer pane (–50). Suitable for emergency escape. U-value 1.3 W/m²K.

GPL SD5N1	GPL 3550 Roof Window + EDN Recessed Flashing for slate up to 8mm thick (min 20° roof pitch)	-	-	-	-	£687	-
GPL SD5P1	GPL 3550 Roof Window + EDP Flashing for plain tiles up to 15mm thick (min 25° roof pitch)	-	-	-	-	£636	-
GPL SD5W1	GPL 3550 Roof Window + EDW Flashing for tiles up to 120mm in profile (min 15° roof pitch)	-	-	-	-	£654	-
GPL SD5J1	GPL 3550 Roof Window + EDJ Recessed Flashing for tiles up to 90mm in profile (min 20° roof pitch)	-	-	-	-	£687	-

	55x78	55x98	78x98	134x98	55x118	66x118	78x118	114x118	78x140	94x140	134x140	94x160
Optional glazing bars for standard windows	CK02	CK04	MK04	UK04	CK06	FK06	MK06	SK06	MK08	PK08	UK08	PK10
2 glazing bars for SK06, UK04 & UK08	ZGA WK02 0024 £20	ZGA WK04 0024 £22	ZGA WK06 0024 £24	ZGA WK08 0024 £26	ZGA WK10 0024 £28							

GGL/GPL Conservation Roof Window



The VELUX Conservation roof window provides all the technically superior features of a VELUX Roof Window in a traditional black conservation style including glazing bar/s. The GGL centre-pivot and GPL top-hung windows are manufactured in high quality natural pine with a clear lacquered pine internal finish.

The Centre-pivot (GGL) is manually operated and is recommended by VELUX for higher reach windows. To watch an illustration of how the window operates click here.



The Top-hung (GPL) is manually operated and is recommended by VELUX for lower level installation and is ideal for shallower roof pitches. It is also suitable for escape purposes. To watch an illustration of how the window operates click here.



GGL/GPL



Features/Benefits

- Ventilation bar with dust and insect filter – *Allows fresh air to enter the room while the window is securely closed*
- Friction springs – *Allows easy operation of window*
- Sash rotates 180° from inside – *Allows easy and convenient cleaning*
- Barrel bolt – *Allows the window to be locked in two positions – At 180° for secure cleaning of the exterior pane internally – At 5° to allow extra ventilation*

Operation

GGL – The window is operated manually using the full width control bar on the ventilation flap along the top of the sash.
GPL – The sash which is top-hung is opened and closed using the bottom handle and can remain open in any position up to 45°.


Glazing options

- (–50) glazing Double glazed, toughened outer pane. Also available in;
- (–60) glazing Double glazed, laminated inner pane, toughened outer pane with Easy-to-clean coating, enhanced noise reduction.
- (–70) glazing Double glazed, laminated inner pane, toughened outer pane.

Cladding

- NCS standard colour (Black), Nearest RAL standard colour: 9005.

Sizes (cm)



Centre-pivot

Tiles 15-90°
Tiles (recessed) 20-90°
Plain tiles 25-90°
Slate (recessed) 20-90°



Top-hung

Tiles 15-55°
Tiles (recessed) 20-55°
Plain tiles 25-55°
Slate (recessed) 20-55°

TOP HUNG - For roof pitches from 55°-75°, please specify special springs when ordering.

Maintenance

The pane should be cleaned with a soft, clean, lint-free cloth or non-abrasive sponge. The rest of the window can be cleaned with ordinary household cleaners. The filter can be removed and either washed or replaced.

For further advice on maintenance please click here.

Guarantee

- 10 year VELUX guarantee on windows and flashing kits.
- 3 year guarantee on blinds, shutters, awnings and electrics.

Click here for further information regarding the VELUX guarantee.

Interior finish option


GGL

- White paint finish.

GPL

- White paint finish.

Best practice installation

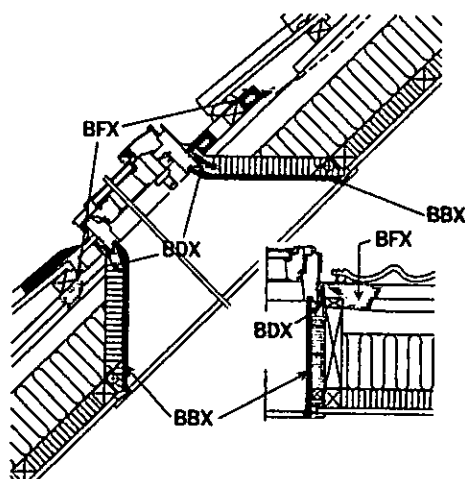

Technical data – GGL/GPL Conservation

Size	Window Options	Exterior Frame WxH	Visible Glass exf	Lining Rebate lrd	Size	Window Options	Exterior Frame WxH	Visible Glass exf	Lining Rebate lrd
CK04	GGL	550 x 978	371 x 783	495 x 919	MK06	GGL	780 x 1178	601 x 983	725 x 1119
CK06	GGL	550 x 1178	371 x 983	495 x 1119	MK08	GGL, GPL	780 x 1398	601 x 1203	725 x 1339
FK06	GGL	660 x 1178	481 x 983	605 x 1119	UK04	GGL	1340 x 978	1161 x 783	1285 x 919

Please refer to GGL and GPL Technical data Sheets for further information.