



Dorking Multi



Ibstock
At the heart of building

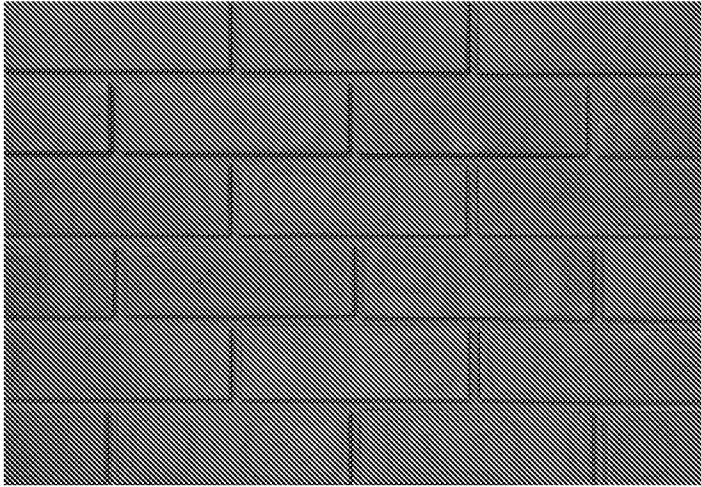

Product Information

Ibstock Code:	4102
Type:	Wirecut
Facing Description:	Sandfaced
Dry Brick Weight (kg):	2.1kg
Pack Quantity:	500
Packaging (standard):	Banded (plastic)
Factory:	South Holmwood

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm):	215x102x65
Size Tolerances Mean & Range:	T2 R1
Configuration:	Vertically Perforated
Voids (%):	30-34
Compressive Strength (N/mm ²):	40
Active Soluble Salts:	S2
Water Absorption (% weight):	12
Durability:	F2
Gross Dry Density (Sound Insulation) (Kg/m ³):	1450
Equivalent Thermal Conductivity "K" value 5% Exposed:	Refer to Ibstock
Initial Rate of Absorption (Suction Rate) (Kg/m ² /min):	Refer to Ibstock
EAN:	5036340000000

02/04/2020