

Order Helpline 01752 692 760

My Account

Contact Us

Roofingsuperstore®
co.uk

Search by name, product code, or brand...

Your basket is empty

Home Lead Flashing Roof Vents Pitched Roofing Flat Roofing Pitched Roof Windows Blinds & Shutters Flat Roof Windows Roofing Sheets Roofing Accessories Loft Insulation Roof Shingles Roofing Tools Fascia & Guttering

NATIONWIDE DELIVERY
Available on all orders

WE'RE HERE TO HELP
Call us now on 01752 692 760

SECURE PAYMENTS
Securely processed by Sagepay

EMAIL NEWSLETTER
Signup for our latest offers

Home Pitched Roof Windows VELUX Windows VELUX Conservation Roof Windows For Plain Tile Installation

VELUX GGL MK06 SD5P2 Conservation Window For 15mm Tiles - 78cm X 118cm

VELUX GGL MK06 SD5P2 Conservation Window for 15mm Tiles - 78cm x 118cm

£450.26 inc vat 1 Add to Basket
£375.22 ex vat

£450.26
inc vat
£375.22
ex vat

Additional Information
Product code: GGL MK06 SD5P2
Brand: VELUX
Estimated delivery: 2-3 Days

[Installation Guide](#)

[Range Brochure](#)

[Installation Guide](#)


[User Guide](#)

[Help](#)

✓ **Lowest Price Guarantee!**

We'll beat any genuine advertised price on this product. Conditions Apply.

Free Delivery on all VELUX® Windows & Flashings

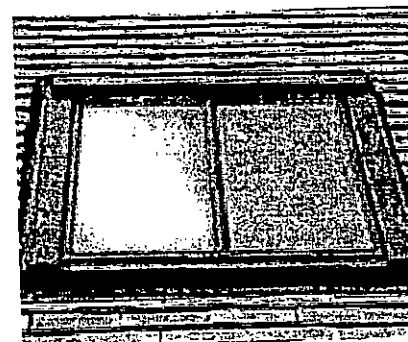

This is a double glazed white painted centre pivot window with laminated glazing and has a u-value of 1.3

Please note this conservation window comes with a glazing bar insulation collar (BD%), an underfelt collar (BF%) and a flashing kit for plain tiles up to 15mm thick (EDP)

New generation features

More daylight : up to 18% larger pane area.

Slim profile : slim profiles and larger pane means more glass and less frame.

Thermo technology : innovative use of high performance insulation material.

More comfort : a more modern and attractive design with excellent ventilation and operation control.

Control bar : new design of the control bar with functionality icons.

Exterior design : improved exterior finish with a softer and more discrete expression.

Click-on covers : fewer screws with the new click-on covers.

Top cover : slimmer top cover.

Centre pivot conservation roof windows

When planning details that a window of traditional appearance is required, conservation roof windows should be considered. All of our conservation roof windows have the technically superior features of a VELUX roof window in a traditional black conservation style.

• Black external profiles and glazing bar - RAL colour 9005.

• Recessed installation for slate roofs.

Lacquered natural pine finish painted white - GGL

• Pine core painted white.

• Excellent value for money and easy to install.

• Made from High quality natural pine.

• Protective triple coat clear lacquer helps to preserve the timber of the window.

• Easy to use top control bar for opening and even ventilation purposes when the window is closed.

• Rotates 180° for easy cleaning.

- - 70 laminated glazing

• 6.4mm laminated inner pane offers additional safety.

• Offers improved noise reduction compared to - -34 and - -59 glazing

• 4mm toughened outer pane with low-E coating.

Plain tile flashings for profiles up to 15mm thick - EDP

VELUX provide a range of flashing options to suit your roof material.

• For standard installation heights install the brackets at the top and bottom of the frame at the red line level.

• Flashings for installing one roof window in plain tiles - max length of 340mm.

• Maximum profile of 15mm.

• Roof pitch between 25 and 90°.

Properties

• 10 year guarantee on windows and flashings.

• Suitable for roof pitches between 25 and 90°.

• BBA certified

VELUX FLASHING
required for this window

[View Options](#)

Frequently bought together...



Flint Lighter

£3.82 inc vat
£3.18 ex vat

1 Add »



VELUX GGL
CK04 SD5P2
Conservation
Window for

£350.40 inc vat
£282.00 ex vat

1 Add »



VELUX GGL
CK02 3070 Pine
Centre Pivot
Window

£191.84 inc vat
£159.87 ex vat

1 Add »



Universal Roller
Blind For Roof
Windows - 55cm
x 78cm - Boige

£32.58 inc vat
£27.15 ex vat

1 Add »



Tyzack Gauging
Trowel

£20.59 inc vat
£17.16 ex vat

1 Add »



VELUX TWF 0K14
2010 Flexible Sun
Tunnel for Tiles -
14" Diameter

£238.09 inc vat
£198.41 ex vat

1 Add »