

NATIVE TREE PLANTING Strategic and Public Open Space Areas

Species	Form	Grth cm	Height cm	Root condition	Quantity
Acer campestre	EHS	14-16	425-600	65/65 L	24
Alnus glutinosa	EHS	14-16	425-600	65/65 L	15
Betula pendula	EHS	14-16	425-600	65/65 L	17
Betula pubescens	EHS	14-16	425-600	65/65 L	16
Carpinus betulus	EHS	14-16	425-600	65/65 L	19
Fagus sylvatica	EHS	14-16	425-600	65/65 L	15
Malus domestica	EHS	14-16	425-600	65/65 L	6
Prunus domestica	EHS	14-16	425-600	65/65 L	4
Populus tremula	EHS	14-16	425-600	65/65 L	16
Tilia cordata	EHS	14-16	425-600	65/65 L	10
Quercus robur	EHS	14-16	425-600	65/65 L	15
Sorbus aucuparia	EHS	14-16	425-600	65/65 L	11

ORNAMENTAL TREE PLANTING Side Roads, On Plot and Car Parking Areas

Species	Form	Grth cm	Height cm	Root condition	Quantity
Carpinus betulus 'Frans Fontaine'	EHS	14-16	425-600	65/65 L	15
Tilia cordata 'Greenspire'	EHS	14-16	425-600	65/65 L	24
Sorbus commata 'Embley'	EHS	14-16	425-600	65/65 L	20

NATIVE HEDGING

Species	Height/ spread cm	Post size (LxW)	Habit	Min no. of bushes	No. / m2
Carpinus betulus	60-80	2L	Feathered	4	5lin m
Fagus sylvatica	60-80	2L	Feathered	4	5lin m
Ligustrum vulgare	60-80	2L	Feathered	4	4lin m

NATIVE STRUCTURE MIX @ 1M CTRS

Species	Root Condition	Age + Size Transpl	Height cm	Quantity Area 5	Quantity Area 6	Total Quantity
Acer campestre (15%)	Bagged	2x	150-175	42	42	84
Crataegus monogyna (20%)	Bagged	1+1	40-60	56	56	112
Corylus avellana (20%)	Bagged	1+1	40-60	42	42	84
Malus domestica (15%)	Bagged	1+2	100-125	28	28	56
Prunus spinosa (10%)	Bagged	1+1	40-60	28	28	56
Sambucus nigra (10%)	Bagged	1+1	40-60	28	28	56

NATIVE HEDGE TRANSPLANTS at 7 per linear metre, triple staggered row

Species	Root Condition	Age + Size Transpl	Height cm	Quantity Area 1	Quantity Area 2	Quantity Area 3	Quantity Area 4	Total Quantity
Acer campestre (20%)	Bagged	1+1	40-60	666	242	244	123	1275
Crataegus monogyna (30%)	Bagged	1+1	40-60	969	363	367	194	1913
Corylus avellana (10%)	Bagged	1+1	40-60	333	121	122	61	637
Cornus sanguineum (10%)	Bagged	1+1	40-60	333	121	122	61	637
Eunymus europaeus (10%)	Bagged	1+1	40-60	333	121	122	61	637
Ilex aquifolium (10%)	3L	-	40-60	333	121	122	61	637
Prunus spinosa (10%)	Bagged	1+1	40-60	333	121	122	61	637

SHRUB PLANTING for the RHS Plants for Pollinators Lists

Species	Height/ spread cm	Post size (LxW)	Habit	Min no. of bushes	No. / m2
Berberis 'Amstelveen'	20-30	2L	Bushy	3	3
Bergenia cordifolia	15-20	3L	-	-	5
'Purpurea'	30-40	3L	Bushy	5	5
Buxus sempervirens 'Faulkner'	20-30	2L	Bushy	3	3
Berberis thunbergii	20-30	2L	Bushy	3	3
strepurpurea 'Nana'	20-30	3L	Bushy	4	3
Cistus corbantoensis	40-60	3L	Branched	3	1.5
Cornus alba 'Elegantissima'	40-60	3L	Branched	4	1.5
Cornus alba 'Kesselringi'	20-30	2L	-	-	5
Cornus alba 'Elegantissima'	40-60	3L	Branched	3	1.5
Carex oshimensis 'Evergold'	20-30	2L	-	-	5
Cotoneaster 'Skogholm'	30-40	3L	Spreading	3	3
Cistus 'Silver Pink'	30-40	3L	Bushy	4	3
Cornus sanguinea 'Midwinter Fire'	40-60	3L	Branched	3	4
Cholisia ternata	30-40	3L	Bushy	7	1.5
Eleagnus x ebbingei	60-80	3L	Bushy	3	1.5
Euonymus 'Emerald' n' Cold	20-30	3L	Bushy	7	5
Eunymus 'Emerald Gaiety'	20-30	3L	Bushy	7	5
Geranium 'Johnsons Blue'	20-30	2L	-	-	5
Hebe albicans 'Red Edge'	20-30	3L	Bushy	5	3
Hebe rakaiensis	20-30	3L	Bushy	5	3
Hypericum 'Hidcote'	30-40	3L	Bushy	5	2
Hebe 'Mrs Winder'	20-30	3L	Bushy	7	3
Heuchera 'Sugar Frosting'	20-30	2L	-	-	5
Lavandula 'Hidcote'	20-30	3L	Bushy	5	5
Lonicera 'Maygreen'	30-40	2L	Bushy	3	3
Malva 'Agropolis'	30-40	3L	Bushy	3	2.5
Clearia haastii	30-40	3L	Bushy	2	3
Osmanthus burkwoodii	30-40	3L	Bushy	5	1.5
Potentilla 'Albotoeswood'	30-40	3L	Bushy	4	2.5
Potentilla 'Elizabeth'	30-40	4L	Bushy	6	2.5
Potentilla 'Red Ace'	30-40	3L	Bushy	4	2.5
Prunus 'Cito Luken'	30-40	3L	Bushy	4	2
Photinia x Fraseri 'Red Robin'	40-60	3L	Branched	6	1.5
Rosa 'Kent'	30-40	3L	Bushy	4	3
Rosa 'Herfordshire'	30-40	3L	Bushy	3	3
Rubus 'Betty Ashburner'	30-40	3L	Branched	5	3
Spiraea 'Anthony Waterer'	30-40	3L	Branched	5	3
Spiraea 'Goldflame'	20-30	2L	Bushy	5	3
Symphoricarpos 'Hancock'	40-60	3L	Branched	2	2
Sarcococca hookeriana	30-40	3L	Bushy	3	3
Skimmia 'Kew White'	30-40	3L	Bushy	3	3
Skimmia japonica 'Rubella'	30-40	3L	Bushy	3	3
Senecio 'Sunshine'	30-40	3L	Bushy	4	2
Viburnum davidii	30-40	3L	Bushy	3	3
Viburnum tinus 'Eve Price'	30-40	3L	Bushy	7	1.5

POND EDGE (planted randomly - up to 0.5m above settled water level)

Species	Root condition	Nc. / m2	Area A	Area B	Area C	Area D	Area E	Area F	Area G	Total
Calltha palustris	P9/0.5lt	3	5	6	4	8	8	8	4	43
Carex acutiformis	P9/0.5lt	3	5	6	4	8	8	8	4	43
Filipendula ulmaria	P9/0.5lt	3	5	6	4	8	8	8	4	43
Myosotis scorpioides	P9/0.5lt	3	5	6	4	8	8	8	4	43

AQUATIC MARGINALS (planted randomly - to 0.3m below settled water level)

Species	Root condition	Nc. / m2	Area A	Area B	Area C	Area D	Area E	Area F	Area G	Total
Allitriche stagnalis	P9/0.5lt	2	4	5	3	7	7	7	3	36
Hydrocharis morsus ranae	P9/0.5lt	2	4	5	3	7	7	7	3	36
Ranunculus aquatilis	P9/0.5lt	2	4	5	3	7	7	7	3	36
Stratiotes aloides	P9/0.5lt	2	4	5	3	7	7	7	3	36

Amenity Grass Areas

Emorsgate EL1 Flowering Lawn Mix sown at 4gms/m2

Wild Flowers

%	Latin name	Common name
4	Galium verum	Lady's Bedstraw
0.5	Leontodon hispidus	Rough Hawkbit
1	Leucanthemum vulgare	Oxeye Daisy
3	Lotus corniculatus	Birdfoot Trefoil
3	Primula veris	Cowslip
4	Prunella vulgaris	Selfheal
3.5	Ranunculus acris	Meadow Buttercup
0.3	Trifolium pratense	Wild Red Clover

Grasses

%	Latin name	Common name
8	Agrostis capillaris	Common Bent
40	Cynosurus cristatus	Crested Dogtail
28	Festuca rubra	Slender-creeping Red-fescue
4	Phleum bertolonii	Smaller Cats-tail

80

Grassland Mixture - Adjacent Native Hedgerow Planting Areas

Emorsgate EH1 Hedgerow Mixture sown at 4gms/m2

Wild Flowers

%	Latin name	Common name
0.5	Achillea millefolium	Yarrow
1	Agrimonia eupatoria	Agrimony
1.5	Alliaria petiolata	Garic Mustard
0.5	Centaurea nigra	Common Knapweed
2	Galium album - (Galium mollugo)	Hedge Bedstraw
2.2	Geum urbanum	Wood Aven
0.3	Hypericum perforatum	Perforate St John's Wort
1.5	Leucanthemum vulgare	Oxeye Daisy
0.5	Plantago lanceolata	Ribwort Plantain
0.5	Primula veris	Cowslip
2	Prunella vulgaris	Selfheal
2	Silene dioica	Red Campion
0.5	Silene vulgaris	Bladder Campion
1	Stachys sylvatica	Hedge Woundwort
1	Tortilis japonica	Upright Hedge-parasley
0.5	Tragopogon pratensis	Goat's-beard
1.5	Vicia cracca	Tufted Vetch

Grasses

%	Latin name	Common name
10	Agrostis capillaris	Common Bent
1	Anthoxanthum odoratum	Sweet Vernal-grass (w)
6	Brachypodium sylvaticum	False Brome (w)
35	Cynosurus cristatus	Crested Dogtail
2	Deschampsia cespitosa	Tufted Hair-grass (w)
26	Festuca rubra	Slender-creeping Red-fescue

80

Grassland Mixture - Adjacent SuDs Basins and Swales

Emorsgate EP1 Pond Edge Mix sown at 1.5gms/m2

Wildflower

%	Latin name	English name
0.5	Achillea ptarmica	Sneezewort
1.6	Alisma plantago-aquatica	Water plantain
2.5	Angelica sylvestris	Wild angelica
0.5	Eupatorium cannabinum	Hemp agrimony
3.0	Filipendula ulmaria	Meadowweet
1.2	Geum rivale	Water avens
0.5	Hypericum tetragetrum	Square-stalked St Johns wort
3.0	Iris pseudacorus	Yellow iris
1.2	Lotus pedunculatus	Greater birdsfoot trefoil
1.2	Lychnis flos-aquil	Ragged robin
1.0	Lycopus europaeus	Gipsywort
0.5	Lythrum salicaria	Purple loosestrife
0.3	Pulicaria dysenterica	Fliebane
0.5	Scutellaria galericulata	Skullcap
1.0	Thalidrum flavum	Common meadow rue
1.5	Vicia cracca	Tufted vetch

Grassland Mixture - Strategic Open Space Area to East (Floodplain)

Emorsgate EMS Special General-Purpose Meadow Mixture sown at 4gms/m2

Wild Flowers




%	Latin name	Common name
0.5	Achillea millefolium	Yarrow
0.5	Centaurea nigra	Common Knapweed
1.8	Centaurea scabiosa	Greater Knapweed
0.6	Daucus carota	Wild Carrot
0.5	Filipendula ulmaria	Hedge Bedstraw
1	Galium album - (Galium mollugo)	Wood Aven
1	Galium verum	Field Scabious
1	Knautia anensis	Rough Hawkbit
0.2	Leontodon hispidus	Oxeye Daisy
1	Leucanthemum vulgare	Birdfoot Trefoil
0.5	Lotus corniculatus	Hoary Plantain
0.2	Plantago media	Salad Burnet
1.5	Potierum sanguisorba - (Sanguisorba minor)	Cowslip
0.6	Primula veris	Meadow Buttercup
1	Prunella vulgaris	Ranunculus Buttercup
2.5	Ranunculus acris	Yellow Rattle
1	Ranunculus bulbosus	Common Sorel
0.4	Rhinanthus minor	Red Campion
1.5	Rumex acetosa	Bladder Campion
1	Silene dioica	Tufted Vetch
20	Silene vulgaris	
4	Vicia cracca	

Grasses



%	Latin name	Common name
8	Agrostis capillaris	Common Bent
40	Cynosurus cristatus	Crested Dogtail
28	Festuca rubra	Slender-creeping Red-fescue
4	Phleum bertolonii	Smaller Cats-tail

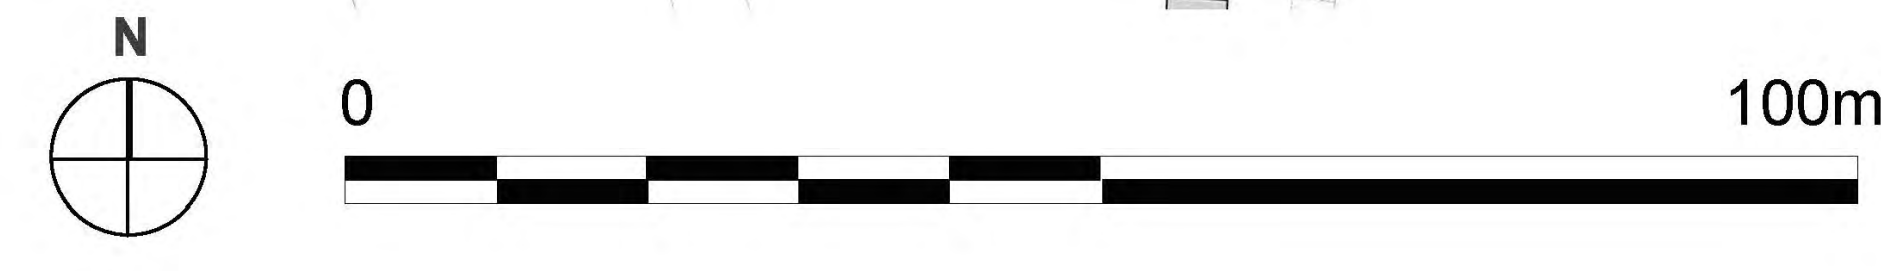
KEY

Soft Landscaping

-  Existing Trees/Vegetation Retained
-  Proposed Tree Planting
-  Proposed Native Structure Mix Planting
-  Proposed Mixed Native Hedge Transplants
-  Proposed Single Species Native Hedge
-  Proposed Shrub Planting - On plot hardy, mixed shrub planting, including species from RHS Plants for Pollinators
-  Proposed Amenity and Rear Garden Grass - Hardy flowering lawn mixture for amenity areas and turf for rear gardens
-  Proposed Grassland - Native wildflower mixes and grassland mixes, for adjacent Suds features and aligning new buffer planting and open space area to east
-  Proposed Grassland - Damp Tolerant Native wildflower mixes and grassland mixes for Suds features
-  Proposed Lawn Mixture - Flowering Lawn Mixture
-  Proposed Marginal Planting - Aquatic marginals planted 0.5m above and below anticipated water line

Hard Landscaping

-  Proposed Highway Access and Paths - Tarmac path with conservation kerb edging
-  Proposed Shared Surface, Driveways and Parking - 'Burnt Ochre' Tegula Priora Block Paving' stretcher bond
-  Proposed Shared Surface, Driveways and Parking - 'Harvest' Tegula Priora Block Paving' stretcher bond
-  Proposed Transitions Paving - 'Pennant Grey' Tegula Priora Block Paving' stretcher bond
-  Proposed Paving - Front garden paths, Textured 'Buff' 450x450mm
-  Proposed 2m wide Path - Brendon gravel with timber edging
-  Proposed 3m wide leisure cycle/footway- Brendon gravel with timber edging
-  Proposed Bench
-  Proposed Play Area - Grass Safety Surfacing
-  Proposed 0.5m High Cleft Natural Style Treated Timber Knee Rail
-  BS: 5837: 2012 Root Protection Area
-  Existing Water Main with 3m buffer either side
-  Existing Foul Sewer with 3m buffer either side
-  Proposed Drainage Pipes



Revision	Description	Date
	First issue	20/1/20
A	Second issue	14/12/20
B	Third issue	3/5/21
C	Fourth issue	6/7/21
D	Fifth issue	2/8/21
E	Sixth issue	21/10/21
F	Seventh issue	24/1/22
G	Eighth issue	14/02/22
H	Ninth issue	18/8/22
I	Tenth issue	10/10/22

NATIVE TREE PLANTING Strategic and Public Open Space Areas						
Species	Form	Girth cm	Height cm	Root condition	Quantity	
Acer campestre	EHS	14-16	425-600	65/65 L	24	
Alnus glutinosa	EHS	14-16	425-600	65/65 L	15	
Betula pendula	EHS	14-16	425-600	65/65 L	17	
Betula pubescens	EHS	14-16	425-600	65/65 L	16	
Carpinus betulus	EHS	14-16	425-600	65/65 L	19	
Fagus sylvatica	EHS	14-16	425-600	65/65 L	15	
Malus domestica	EHS	14-16	425-600	65/65 L	8	
Prunus domestica	EHS	14-16	425-600	65/65 L	4	
Populus tremula	EHS	14-16	425-600	65/65 L	10	
Tilia cordata	EHS	14-16	425-600	65/65 L	24	
Quercus robur	EHS	14-16	425-600	65/65 L	15	
Sorbus aucuparia	EHS	14-16	425-600	65/65 L	11	

ORNAMENTAL TREE PLANTING Side Roads, On Plot and Car Parking Areas						
Species	Form	Girth cm	Height cm	Root condition	Quantity	
Carpinus betulus 'Frans Fontaine'	EHS	14-16	425-600	65/65 L	15	
Tilia cordata 'Greenspire'	EHS	14-16	425-600	65/65 L	24	
Sorbus commixta 'Embley'	EHS	14-16	425-600	65/65 L	20	

NATIVE HEDGING						
Species	Height / spread cm	Pot size (Ltr)	Habit	Min no. of breaks	No. / m2	
Carpinus betulus	60-80	2L	Feathered	4	5/lin m	
Fagus sylvatica	60-80	2L	Feathered	-	5/lin m	
Ligustrum vulgare	60-80	2L	Feathered	-	4/lin m	

NATIVE STRUCTURE MIX @ 1M CTRS						
Species	Root Condition	Age + Transpl	Height cm	Quantity Area 5	Quantity Area 6	Total Quantity
Acer campestre (15%)	Bagged	2x	150-175	42	42	84
Crataegus monogyna (20%)	Bagged	1+1	40-60	56	56	112
Corylus avellana (20%)	Bagged	1+1	40-60	56	56	112
Cornus sanguineum (15%)	Bagged	1+1	40-60	42	42	84
Malus sylvestris (10%)	Bagged	1+2	100-125	28	28	56
Prunus spinosa (10%)	Bagged	1+1	40-60	28	28	56
Sambucus nigra (10%)	Bagged	1+1	40-60	28	28	56

NATIVE HEDGE TRANSPLANTS at 7 per linear metre, triple staggered row						
Species	Root Condition	Age + Transpl	Height cm	Quantity Area 1	Quantity Area 2	Total Quantity
Acer campestre (20%)	Bagged	1+1	40-60	999	363	1362
Crataegus monogyna (30%)	Bagged	1+1	40-60	999	363	1362
Corylus avellana (10%)	Bagged	1+1	40-60	333	121	454
Cornus sanguineum (10%)	Bagged	1+1	40-60	333	121	454
Euonymus europaeus (10%)	Bagged	1+1	40-60	333	121	454
Ilex aquifolium (10%)	3L	-	40-60	333	121	454
Prunus spinosa (10%)	Bagged	1+1	40-60	333	121	454

SHRUB PLANTING - Species for the RHS Plants for Pollinators Lists						
Species	Height / spread cm	Pot size (Ltr)	Habit	Min no. of breaks	No. / m2	
Berberis 'Amstelveen'	20-30	2L	Bushy	3	3	
Bergenia cordifolia	15-20	3L	-	-	5	
Parthenocissus	30-40	3L	Bushy	5	5	
Buxus sempervirens 'Faulstich'	20-30	3L	Bushy	3	3	
Berberis thunbergii atropurpurea 'Nana'	20-30	3L	Bushy	3	3	
Cistus corbataensis	30-40	3L	Bushy	4	3	
Cornus alba 'Elegantissima'	40-60	3L	Branched	3	1.5	
Cornus alba 'Kesselringii'	40-60	3L	Branched	4	1.5	
Carex oshimensis 'Evergold'	20-30	2L	-	-	5	
Cotoneaster 'Siegfried'	30-40	3L	Spreading	3	3	
Cistus 'Silver Pink'	30-40	3L	Bushy	4	3	
Cornus sanguinea 'Midwinter Fire'	40-60	3L	Branched	3	4	
Choisya ternata	30-40	3L	Bushy	7	1.5	
Elaeagnus x ebbingei	60-80	3L	Bushy	3	1.5	
Euonymus 'Emerald n' Gold'	20-30	3L	Bushy	7	5	
Euonymus 'Emerald Galaxy'	20-30	3L	Bushy	7	5	
Geranium 'Johnsons Blue'	20-30	2L	-	-	5	
Hebe albertiana 'Red Edge'	20-30	3L	Bushy	5	3	
Hebe sakianensis	20-30	3L	Bushy	5	3	
Hypericum 'Hidcote'	30-40	3L	Bushy	5	2	
Hebe 'Mrs Winder'	20-30	3L	Bushy	7	3	
Hebe 'Mrs Winder'	20-30	2L	Bushy	7	3	
Lavandula 'Hidcote'	20-30	3L	Bushy	5	5	
Lonicera 'Maygreen'	30-40	2L	Bushy	3	3	
Malva 'Apricot'	30-40	3L	Bushy	3	2.5	
Olearia hastata	30-40	3L	Bushy	2	3	
Osmanthus burkwoodii	30-40	3L	Bushy	5	1.5	
Potentilla 'Abbotswood'	30-40	3L	Bushy	4	2.5	
Potentilla 'Elizabeth'	30-40	4L	Bushy	6	2.5	
Potentilla 'Red Ace'	30-40	3L	Bushy	4	2.5	
Prunus 'Oto Luyken'	30-40	3L	Bushy	3	2	
Photinia x Fraseri 'Red Robin'	40-60	3L	Branched	6	1.5	
Rosa 'Kent'	30-40	3L	Bushy	4	3	
Rosa 'Herfordshire'	30-40	3L	Bushy	3	3	
Rubus 'Betty Ashburner'	30-40	3L	Branched	5	3	
Spiraea 'Anthony Waterer'	30-40	3L	Branched	5	3	
Spiraea 'Goldflame'	20-30	2L	Bushy	5	3	
Symphoricarpos 'Hancock'	40-60	3L	Branched	2	2	
Sarcococa hookeriana	30-40	3L	Bushy	3	3	
Skimmia 'Kew White'	30-40	3L	Bushy	3	3	
Skimmia japonica 'Rubella'	30-40	3L	Bushy	3	3	
Senecio 'Sunshine'	30-40	3L	Bushy	4	2	
Viburnum davidii	30-40	3L	Bushy	3	3	
Viburnum tinus 'Eve Price'	30-40	3L	Bushy	7	1.5	

POND EDGE (planted randomly - up to 0.5m above settled water level)										
Species	Root condition	No. / m2	Area A	Area B	Area C	Area D	Area E	Area F	Area G	Total
Callitriche palustris	P9/0.5L	3	5	6	4	8	8	8	4	43
Carex acutiformis	P9/0.5L	3	5	6	4	8	8	8	4	43
Filipendula ulmaria	P9/0.5L	3	5	6	4	8	8	8	4	43
Myosotis scorpioides	P9/0.5L	3	5	6	4	8	8	8	4	43

AQUATIC MARGINALS (planted randomly - to 0.3m below settled water level)										
Species	Root condition	No. / m2	Area A	Area B	Area C	Area D	Area E	Area F	Area G	Total
Allitriche stagnalis	P9/0.5L	2	4	5	3	7	7	7	3	36
Hydrocharis morsus ranae	P9/0.5L	2	4	5	3	7	7	7	3	36
Ranunculus aquatilis	P9/0.5L	2	4	5	3	7	7	7	3	36
Stratiotes aloides	P9/0.5L	2	4	5	3	7	7	7	3	36

Amenity Grass Areas
Emorsgate EL1 Flowering Lawn Mix sown at 4gms/m2

Wild Flowers			Common name		
%	Latin name		%	Latin name	
4	Gallium verum		4	Gallium verum	
0.5	Leontodon hispidus		0.5	Leontodon hispidus	
1	Leucanthemum vulgare		1	Leucanthemum vulgare	
3.7	Lotus corniculatus		3.7	Lotus corniculatus	
3	Primula veris		3	Primula veris	
4	Prunella vulgaris		4	Prunella vulgaris	
3.5	Ranunculus acris		3.5	Ranunculus acris	
0.3	Trifolium pratense		0.3	Trifolium pratense	
20			20		
Grasses			Common name		
%	Latin name		%	Latin name	
8	Agrostis capillaris		8	Agrostis capillaris	
40	Cynosurus cristatus		40	Cynosurus cristatus	
28	Festuca rubra		28	Festuca rubra	
4	Pheum bertolonii		4	Pheum bertolonii	
80			80		

Grassland Mixture - Adjacent Native Hedgerow Planting Areas
Emorsgate EH1 Hedgerow Mixture sown at 4gms/m2

Wild Flowers			Common name		
%	Latin name		%	Latin name	
0.5	Achillea millefolium		0.5	Achillea millefolium	
1	Agrostis eupatori		1	Agrostis eupatori	
1.5	Alliaria petiolata		1.5	Alliaria petiolata	
0.3	Centaurea nigra		0.3	Centaurea nigra	
2.2	Gallium album - (Gallium mollugo)		2.2	Gallium album - (Gallium mollugo)	
0.3	Geum urbanum		0.3	Geum urbanum	
1.5	Hypericum perforatum		1.5	Hypericum perforatum	
0.5	Plantago lanceolata		0.5	Plantago lanceolata	
0.5	Primula veris		0.5	Primula veris	
2	Prunella vulgaris		2	Prunella vulgaris	
2	Silene dioica		2	Silene dioica	
0.5	Stachys sylvatica		0.5	Stachys sylvatica	
1	Torilis japonica		1	Torilis japonica	
1.5	Tragopogon pratensis		1.5	Tragopogon pratensis	
28	Vicia cracca		28	Vicia cracca	
Grasses			Common name		
%	Latin name		%	Latin name	
10	Agrostis capillaris		10	Agrostis capillaris	
1	Anthoxanthum odoratum		1	Anthoxanthum odoratum	
6	Brachypodium sylvaticum		6	Brachypodium sylvaticum	
35	Cynosurus cristatus		35	Cynosurus cristatus	
2	Deschampsia cespitosa		2	Deschampsia cespitosa	
26	Festuca rubra		26	Festuca rubra	
80			80		

Grassland Mixture - Adjacent SuDs Basins and Swales
Emorsgate EP1 Pond Edge Mix sown at 1.5gms/m2

Wildflower			English name		
%	Latin name		%	Latin name	
0.5	Achillea ptarmica		0.5	Achillea ptarmica	
1.8	Alliaria plantago-aquatica		1.8	Alliaria plantago-aquatica	
2.5	Angelica sylvestris		2.5	Angelica sylvestris	
0.5	Eupatorium cannabinum		0.5	Eupatorium cannabinum	
3.0	Filipendula ulmaria		3.0	Filipendula ulmaria	
1.2	Geum rivale		1.2	Geum rivale	
0.5	Hypericum tetrapetrum		0.5	Hypericum tetrapetrum	
3.0	Irish pseudocornus		3.0	Irish pseudocornus	
1.2	Lotus pedunculatus		1.2	Lotus pedunculatus	
1.2	Lycchnis flos-cuculi		1.2	Lycchnis flos-cuculi	
1.0	Lycopus europaeus		1.0	Lycopus europaeus	
0.5	Lythrum salicaria		0.5	Lythrum salicaria	
0.3	Pulicaria dysenterica		0.3	Pulicaria dysenterica	
0.5	Scutellaria galericulata		0.5	Scutellaria galericulata	
1.0	Thalictrum flavum		1.0	Thalictrum flavum	
1.5	Vicia cracca		1.5	Vicia cracca	

ssland Mixture - Strategic Open Space Area to East (Floodplain)
orgate EMS Special General-Purpose Meadow Mixture sown at 4gms/m2

Wild Flowers			Common name		
%	Latin name		%	Latin name	
0.5	Achillea millefolium		0.5	Achillea millefolium	
1	Agrostis capillaris		1	Agrostis capillaris	
1.5	Alliaria petiolata		1.5	Alliaria petiolata	
0.3	Centaurea nigra		0.3	Centaurea nigra	
2.2	Gallium album - (Gallium mollugo)		2.2	Gallium album - (Gallium mollugo)	
0.3	Geum urbanum		0.3	Geum urbanum	
1.5	Hypericum perforatum		1.5	Hypericum perforatum	
0.5	Plantago lanceolata		0.5	Plantago lanceolata	
0.5	Primula veris		0.5	Primula veris	
2	Prunella vulgaris		2	Prunella vulgaris	
2	Silene dioica		2	Silene dioica	
0.5	Stachys sylvatica		0.5	Stachys sylvatica	
1	Torilis japonica		1	Torilis japonica	
1.5	Tragopogon pratensis		1.5	Tragopogon pratensis	
28	Vicia cracca		28	Vicia cracca	
Grasses			Common name		
%	Latin name		%	Latin name	
10	Agrostis capillaris		10	Agrostis capillaris	
1	Anthoxanthum odoratum		1	Anthoxanthum odoratum	
6	Brachypodium sylvaticum		6	Brachypodium sylvaticum	
35	Cynosurus cristatus		35	Cynosurus cristatus	
2	Deschampsia cespitosa		2	Deschampsia cespitosa	
26	Festuca rubra		26	Festuca rubra	
80			80		

Grassland Mixture - Strategic Open Space Area to East (Floodplain)
orgate EMS Special General-Purpose Meadow Mixture sown at 4gms/m2

Wildflower			English name		
%	Latin name		%	Latin name	
0.5	Achillea ptarmica		0.5	Achillea ptarmica	
1.8	Alliaria plantago-aquatica		1.8	Alliaria plantago-aquatica	
2.5	Angelica sylvestris		2.5	Angelica sylvestris	
0.5	Eupatorium cannabinum		0.5	Eupatorium cannabinum	
3.0	Filipendula ulmaria		3.0	Filipendula ulmaria	
1.2	Geum rivale		1.2	Geum rivale	
0.5	Hypericum tetrapetrum		0.5	Hypericum tetrapetrum	
3.0	Irish pseudocornus		3.0	Irish pseudocornus	
1.2	Lotus pedunculatus		1.2	Lotus pedunculatus	
1.2	Lycchnis flos-cuculi		1.2	Lycchnis flos-cuculi	
1.0	Lycopus europaeus		1.0	Lycopus europaeus	
0.5	Lythrum salicaria		0.5	Lythrum salicaria	
0.3	Pulicaria dysenterica		0.3	Pulicaria dysenterica	
0.5	Scutellaria galericulata		0.5	Scutellaria galericulata	
1.0	Thalictrum flavum		1.0	Thalictrum flavum	
1.5	Vicia cracca		1.5	Vicia cracca	

KEY

Proposed Native Tree Planting

Proposed Field Maple - 24
(Acer campestre)

Proposed Alder Tree - 15
(Alnus glutinosa)

Proposed Birch Tree