


DESCRIPTION:-

Profile combination & drainage positions

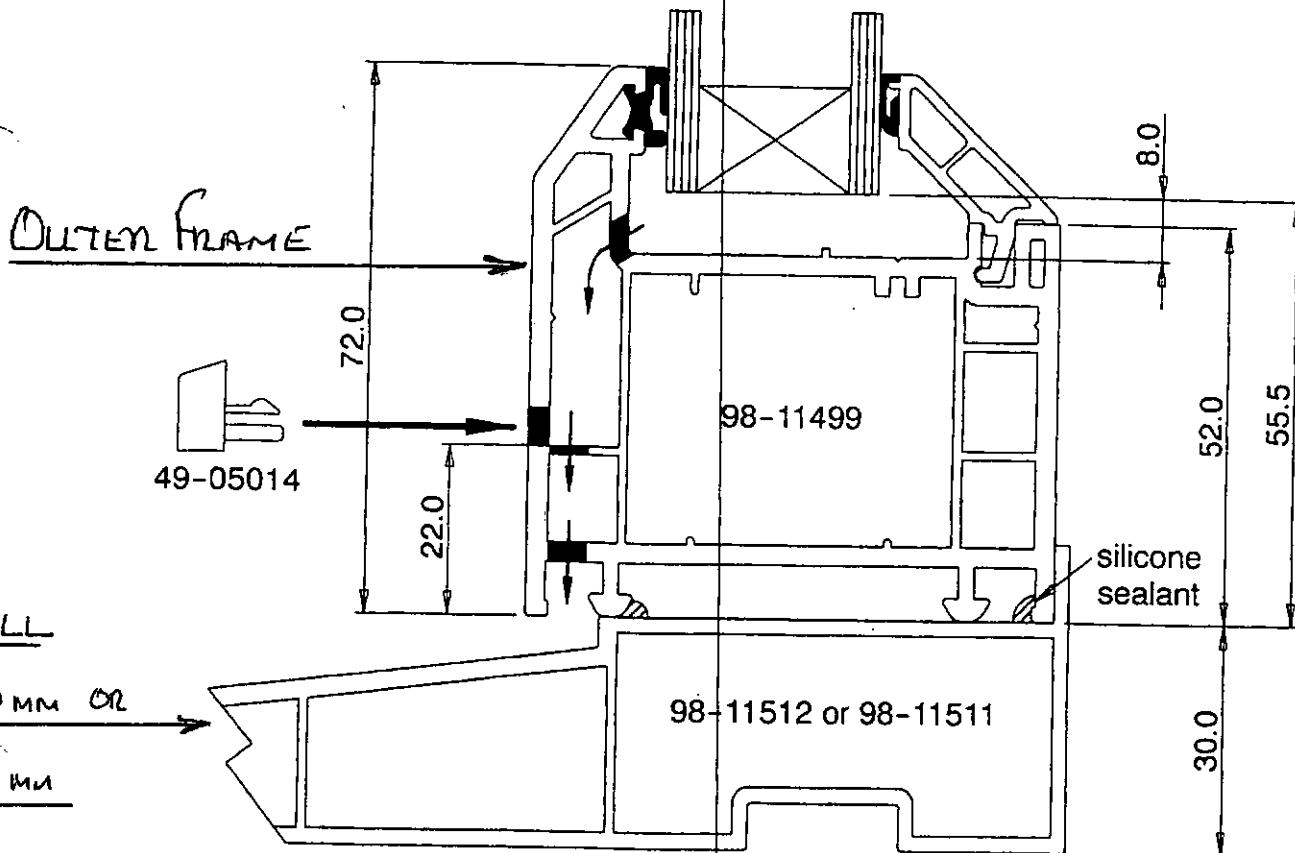


NOTE: Seal outer frame to sill as shown above and at ends using good quality silicone sealant to prevent water ingress.

Both face and concealed drainage slots are shown but only one solution should be used. To cover face drainage slots, a drainage slot cover is used (49-05014).

Ensure drainage slots are not obstructed, and do not break into reinforcement chamber.

DESCRIPTION:-

Profile combination & drainage positions

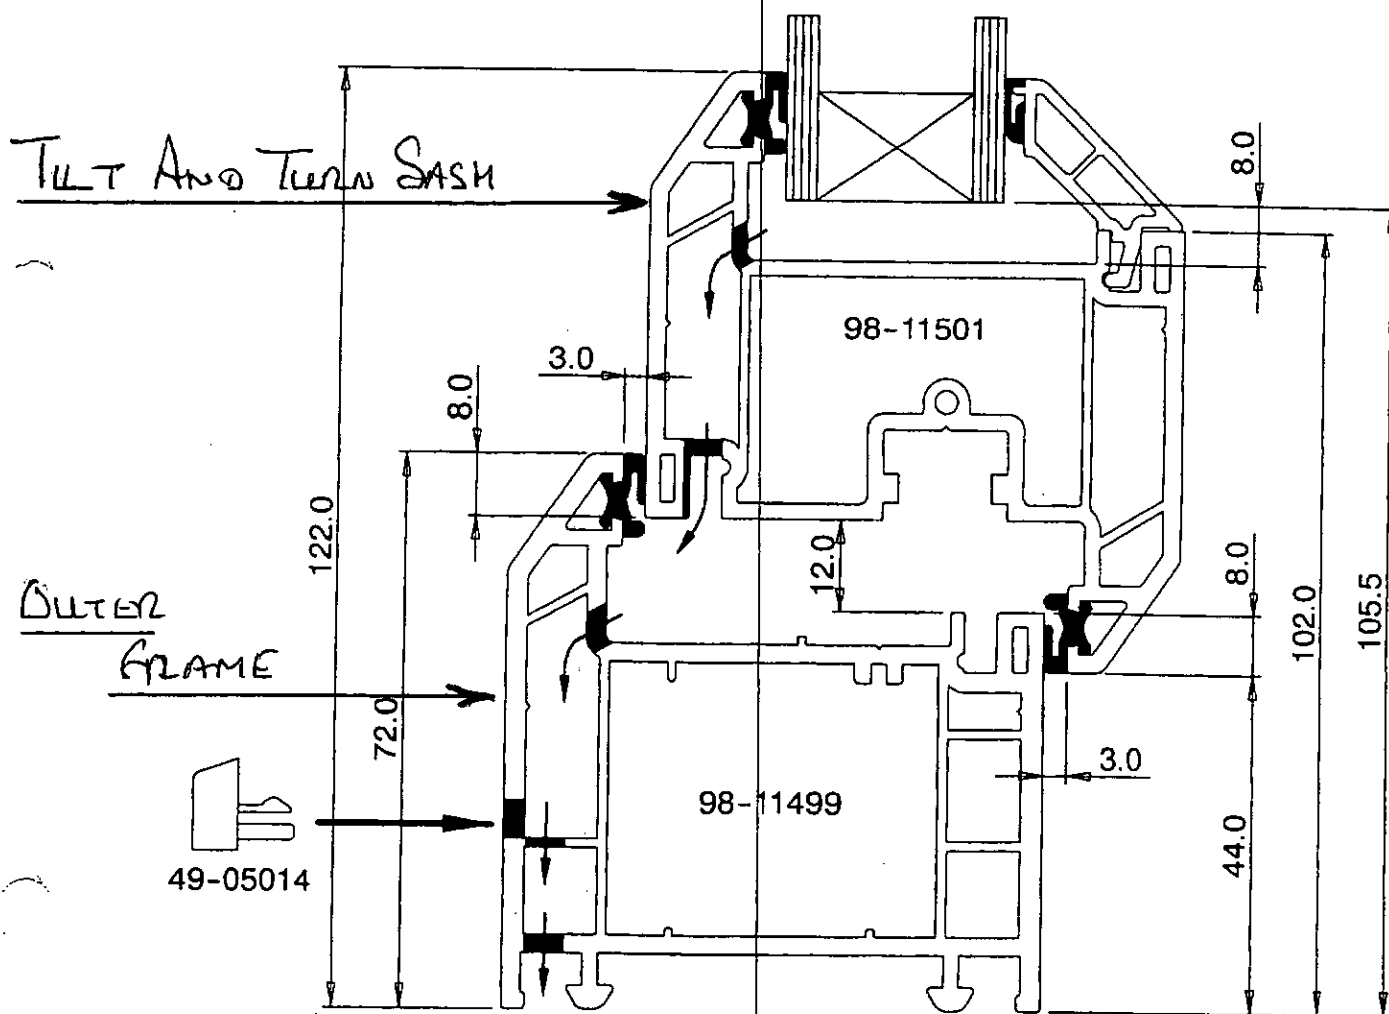

Both face and concealed drainage slots are shown but only **one** solution should be used. To cover face drainage slots, a drainage slot cover is used (49-05014). Ensure drainage slots are not obstructed, and do not break into reinforcement chamber.