



PUM



-  S.1 - SON-E Δ (E27) Internal ignitor
-  S.2 - SON-T Δ (E27) External ignitor
-  M.1 - MBF/U (E27)
-  H.1 - Metal Halide (Ra7s)
-  CF.4 - Compact fluorescent, 2 pin, (GX24q-3), 26W - triple
-  CF.5 - Compact fluorescent, 4 pin, (GX24q-3), 32W - triple
-  CF.6 - Compact fluorescent, 4 pin, (GX24q-4), 42W - triple



TECHNICAL SPECIFICATION

HOUSING & FRAME	Thermo-plastic polycarbonate
DIFFUSERS	Standard glass or polycarbonate
PHOTOCELL	Available for all types
REFLECTORS	Anodised polished aluminium
CONTROL GEAR	Available with a wide variety of options
SUPPLY ACCESS	Hinged front cover opening
EQUIPMENT	Corrosion proof and anti-seizure
STANDARDS	Certified to EN 60598 IP65
COLOURS	Black RAL 9011, Silver RAL 7000, White RAL 9003

WINDAGE SCX=0.110M²

ACCESSORIES


- Steel wire guard
- Steel screen louvre
- Visor
- Screen printed spare glass
- Wire mesh protective cage
- Colour tinted glass lens (special order)
- Timed Ignitors

UMWAG
UMAL
UMV
UMSG
UMC
UMTG
/TI




Transverse Axis
Lamp Axis


SYMMETRIC REFLECTOR
UM70S 70W E27




ASYMMETRIC REFLECTOR
UMA70H 70W RX7



SYMMETRIC REFLECTOR
UM150MHL 150W RX7S



CIRCULAR PROJECTOR
UMP70 70W RX7S



DESCRIPTION

LAMP Wt.(kg)

PART No.

WHITE
SILVER

SYMMETRIC REFLECTOR POLYCARBONATE IP65

HIGH PRESSURE SODIUM Δ Δ

50W - BLACK	S.1	3.90	UM50S	/W	/S
70W - BLACK	S.1	3.90	UM70S	/W	/S
50W - BLACK	S.2	3.90	UM50SON-T	/W	/S
70W - BLACK	S.2	3.90	UM70SON-T	/W	/S

MERCURY BLENDED FLU.

50W - BLACK	M.1	3.90	UM50M	/W	/S
80W - BLACK	M.1	3.90	UM80M	/W	/S
125W - BLACK	M.1	3.93	UM125M	/W	/S

METAL HALIDE

70W - BLACK	H.1	4.00	UM70MHL	/W	/S
150W - BLACK	H.1	4.00	UM150MHL	/W	/S

COMPACT FLUORESCENT

26W - BLACK	CF.4	3.00	UM26	/W	/S
32W - BLACK	CF.5	3.10	UM32	/W	/S
42W - BLACK - TBA	CF.6	3.20	UM42	/W	/S

ASYMMETRIC REFLECTOR POLYCARBONATE IP65

HIGH PRESSURE SODIUM Δ

50W - BLACK	S.2	3.90	UMAS0S	/W	/S
70W - BLACK	S.2	3.92	UMA70S	/W	/S

METAL HALIDE

70W - BLACK	H.1	4.00	UMA70MHL	/W	/S
-------------	-----	------	----------	----	----

CIRCULAR PROJECTOR 30° POLYCARBONATE IP65

METAL HALIDE

70W - BLACK	H.1	4.00	UMP70	/W	/S
150W - BLACK	H.1	4.30	UMP150	/W	/S

POLYCARBONATE LENS POLYCARBONATE IP65

HIGH PRESSURE SODIUM

50W - BLACK	S.1	4.10	PUM50S	/W	/S
70W - BLACK	S.1	4.20	PUM70S	/W	/S

MERCURY BLENDED FLU.

50W - BLACK	M.1	4.05	PUM50M	/W	/S
80W - BLACK	M.1	4.05	PUM80M	/W	/S

METAL HALIDE

70W - BLACK	H.1	4.20	PUM70MHL	/W	/S
150W - BLACK	H.1	4.30	PUM150MHL	/W	/S




PHOTOCELL OPTIONS ARE AVAILABLE ON ALL TYPES, TO ORDER SUFFIX CODE WITH /PC. e.g. UM50S/PC

* 150W Polycarbonate lens unit for down lighting only


UM



In addition to standard colours this floodlight is available in a wide range of vibrant solid colour options including: yellow, green, blue, red, sandstone. Match a corporate image or colour co-ordinate any large lighting project. Applications include interior or exterior schemes including car showrooms and forecourts, theme parks, hotels, gardens, large retail complexes, offices and facade lighting. Colours are generated using top quality pure polycarbonate, guaranteed to stay crisp and bright without colour fade. Available with built-in photocells.

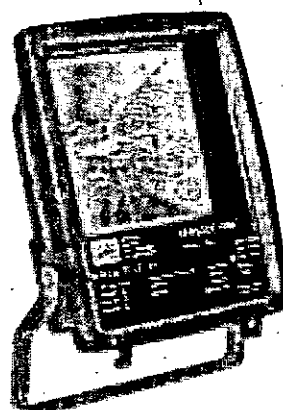

PUM



-  S.1 - SON-E Δ (E27) Internal ignitor
-  S.2 - SON-T Δ (E27) External ignitor
-  M.1 - MBF/U (E27)
-  H.1 - Metal Halide (Rx7s)
-  CF.4 - Compact fluorescent, 2 pin, (GX24d-3), 26W - triple
-  CF.5 - Compact fluorescent, 4 pin, (GX24q-3), 32W - triple
-  CF.6 - Compact fluorescent, 4 pin, (GX24q-4), 42W - triple



SOLID COLOURS

DESCRIPTION

LAMP

WELFARE

PART No.

SAND
YELLOW
RED
GREEN
BLUE

SYMMETRIC REFLECTOR POLYCARBONATE IP65

HIGH PRESSURE SODIUM Δ

50W	S.1	3.90	UM50S	/SI	/Y	/R	/G	/B
70W	S.1	3.90	UM70S	/SI	/Y	/R	/G	/B
50W	S.2	3.90	UM50SON-T	/SI	/Y	/R	/G	/B
70W	S.2	3.90	UM70SON-T	/SI	/Y	/R	/G	/B

MERCURY BLENDED FLU.

50W	M.1	3.90	UM50M	/SI	/Y	/R	/G	/B
80W	M.1	3.90	UM80M	/SI	/Y	/R	/G	/B
125W	M.1	3.93	UM125M	/SI	/Y	/R	/G	/B

METAL HALIDE

70W	H.1	4.00	UM70MHL	/SI	/Y	/R	/G	/B
150W	H.1	4.00	UM150MHL	/SI	/Y	/R	/G	/B

COMPACT FLUORESCENT

26W	CF.4	3.00	UM26	/SI	/Y	/R	/G	/B
32W	CF.5	3.10	UM32	/SI	/Y	/R	/G	/B
42W - TBA	CF.6	3.20	UM42	/SI	/Y	/R	/G	/B



ASYMMETRIC REFLECTOR POLYCARBONATE IP65

HIGH PRESSURE SODIUM Δ

50W	S.2	3.90	UMA50S	/SI	/Y	/R	/G	/B
70W	S.2	3.92	UMA70S	/SI	/Y	/R	/G	/B

METAL HALIDE

70W	H.1	4.00	UMA70MHL	/SI	/Y	/R	/G	/B
-----	-----	------	----------	-----	----	----	----	----



CIRCULAR PROJECTOR 30° POLYCARBONATE IP65

METAL HALIDE

70W	H.1	4.00	UMP70	/SI	/Y	/R	/G	/B
150W	H.1	4.30	UMP150	/SI	/Y	/R	/G	/B



POLYCARBONATE LENS POLYCARBONATE IP65

HIGH PRESSURE SODIUM

50W	S.1	4.10	PUM50S	/SI	/Y	/R	/G	/B
70W	S.1	4.20	PUM70S	/SI	/Y	/R	/G	/B

MERCURY BLENDED FLU.

50W	M.1	4.05	PUM50M	/SI	/Y	/R	/G	/B
80W	M.1	4.05	PUM80M	/SI	/Y	/R	/G	/B

METAL HALIDE (RX7S)

70W	H.1	4.20	PUM70MHL	/SI	/Y	/R	/G	/B
150W *	H.1	4.30	PUM150MHL	/SI	/Y	/R	/G	/B




PHOTOCELL OPTIONS ARE AVAILABLE ON ALL TYPES, TO ORDER SUFFIX CODE WITH /PC. e.g. UM50S/PC

* 150W Polycarbonate lens unit for down lighting only


UM



These Uniflood floodlights take the coloured versions to another level helping to create a new concept for lighting designers and project specifiers. Ideal for interior or exterior lighting, these fixtures are available in clear see through polycarbonate or tinted translucent colour finishes. Combined with coloured lamps a stunning effect can be created. Special orders can be taken for any RAL colour, standard colours are as listed. Applications include clubs, discotheques, bars, gardens, offices and retail lighting.

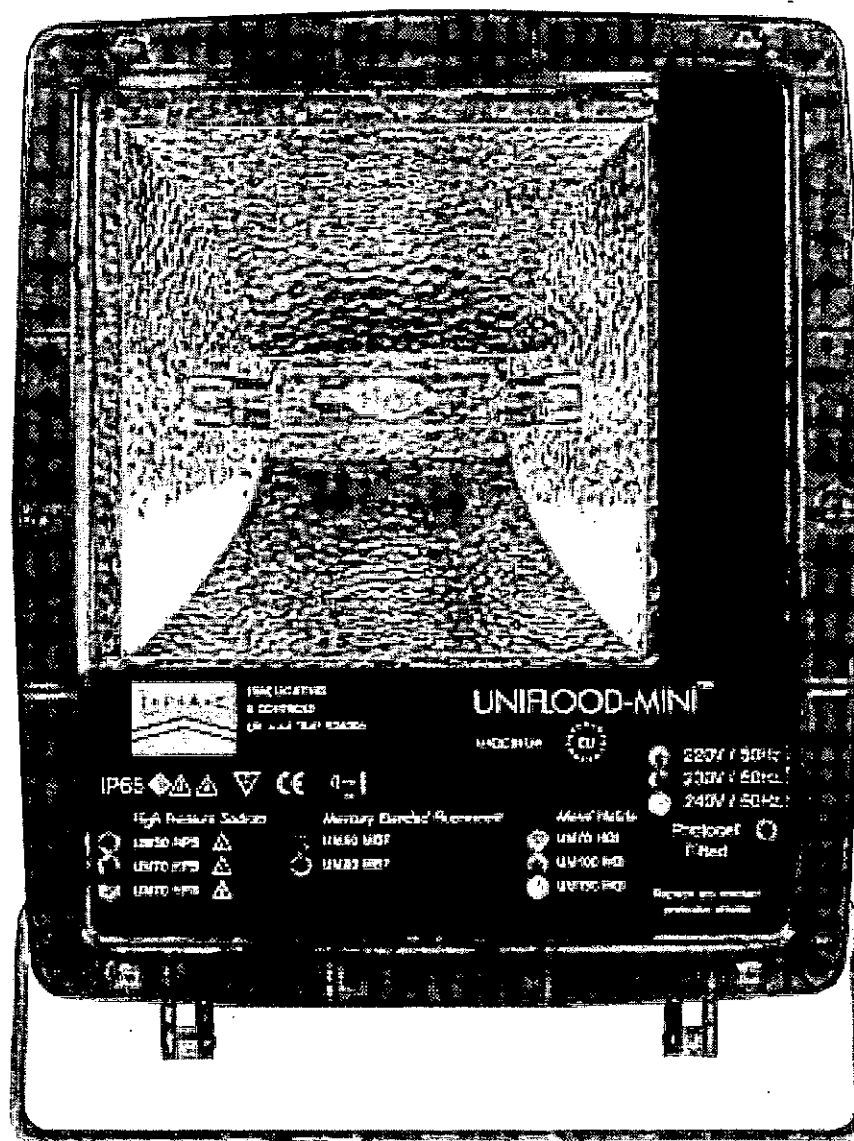

PUM



-  S.1 - SON-E  (E27) Internal ignitor
-  S.2 - SON-T  (E27) External ignitor
-  M.1 - MBF/U (E27)
-  H.1 - Metal Halide (Rx7s)
-  CF.4 - Compact fluorescent, 2 pin, (GX24d-3), 26W - triple
-  CF.5 - Compact fluorescent, 4 pin, (GX24q-3), 32W - triple
-  CF.6 - Compact fluorescent, 4 pin, (GX24q-4), 42W - triple



DESCRIPTION	LAMP	Wt. (kg)	PART No.	CLEAR	ORANGE	PINK	GREEN	BLUE
SYMMETRIC REFLECTOR POLYCARBONATE IP65								
HIGH PRESSURE SODIUM 								
50W	S.1	3.90	UM50S	/CT	/OT	/PT	/GT	/BT
70W	S.1	3.90	UM70S	/CT	/OT	/PT	/GT	/BT
70W	S.2	3.90	UM50SON-T	/CT	/OT	/PT	/GT	/BT
70W	S.2	3.90	UM70SON-T	/CT	/OT	/PT	/GT	/BT
MERCURY BLENDED FLU.								
50W	M.1	3.90	UM50M	/CT	/OT	/PT	/GT	/BT
80W	M.1	3.90	UM80M	/CT	/OT	/PT	/GT	/BT
125W	M.1	3.93	UM125M	/CT	/OT	/PT	/GT	/BT
METAL HALIDE								
70W	H.1	4.00	UM70MHL	/CT	/OT	/PT	/GT	/BT
150W	H.1	4.00	UM150MHL	/CT	/OT	/PT	/GT	/BT
COMPACT FLUORESCENT								
26W	CF.4	3.00	UM26	/CT	/OT	/PT	/GT	/BT
32W	CF.5	3.10	UM32	/CT	/OT	/PT	/GT	/BT
42W - TBA	CF.6	3.20	UM42	/CT	/OT	/PT	/GT	/BT



ASYMMETRIC REFLECTOR POLYCARBONATE IP65								
HIGH PRESSURE SODIUM 								
50W	S.2	3.90	UMA50S	/CT	/OT	/PT	/GT	/BT
70W	S.2	3.92	UMA70S	/CT	/OT	/PT	/GT	/BT
METAL HALIDE								
70W	H.1	4.00	UMA70MHL	/CT	/OT	/PT	/GT	/BT



CIRCULAR PROJECTOR 30° POLYCARBONATE IP65								
METAL HALIDE								
70W	H.1	4.00	UMP70	/CT	/OT	/PT	/GT	/BT
150W	H.1	4.30	UMP150	/CT	/OT	/PT	/GT	/BT



POLYCARBONATE LENS POLYCARBONATE IP65								
HIGH PRESSURE SODIUM								
50W	S.1	4.10	PUM50S	/CT	/OT	/PT	/GT	/BT
70W	S.1	4.20	PUM70S	/CT	/OT	/PT	/GT	/BT
MERCURY BLENDED FLU.								
50W	M.1	4.05	PUM50M	/CT	/OT	/PT	/GT	/BT
80W	M.1	4.05	PUM80M	/CT	/OT	/PT	/GT	/BT
METAL HALIDE								
70W	H.1	4.20	PUM70MHL	/CT	/OT	/PT	/GT	/BT
150W *	H.1	4.30	PUM150MHL	/CT	/OT	/PT	/GT	/BT

 PHOTOCELL OPTIONS ARE AVAILABLE ON ALL TYPES, TO ORDER SUFFIX CODE WITH /PC. e.g. UM50S/PC
* 150W Polycarbonate lens unit for down lighting only