
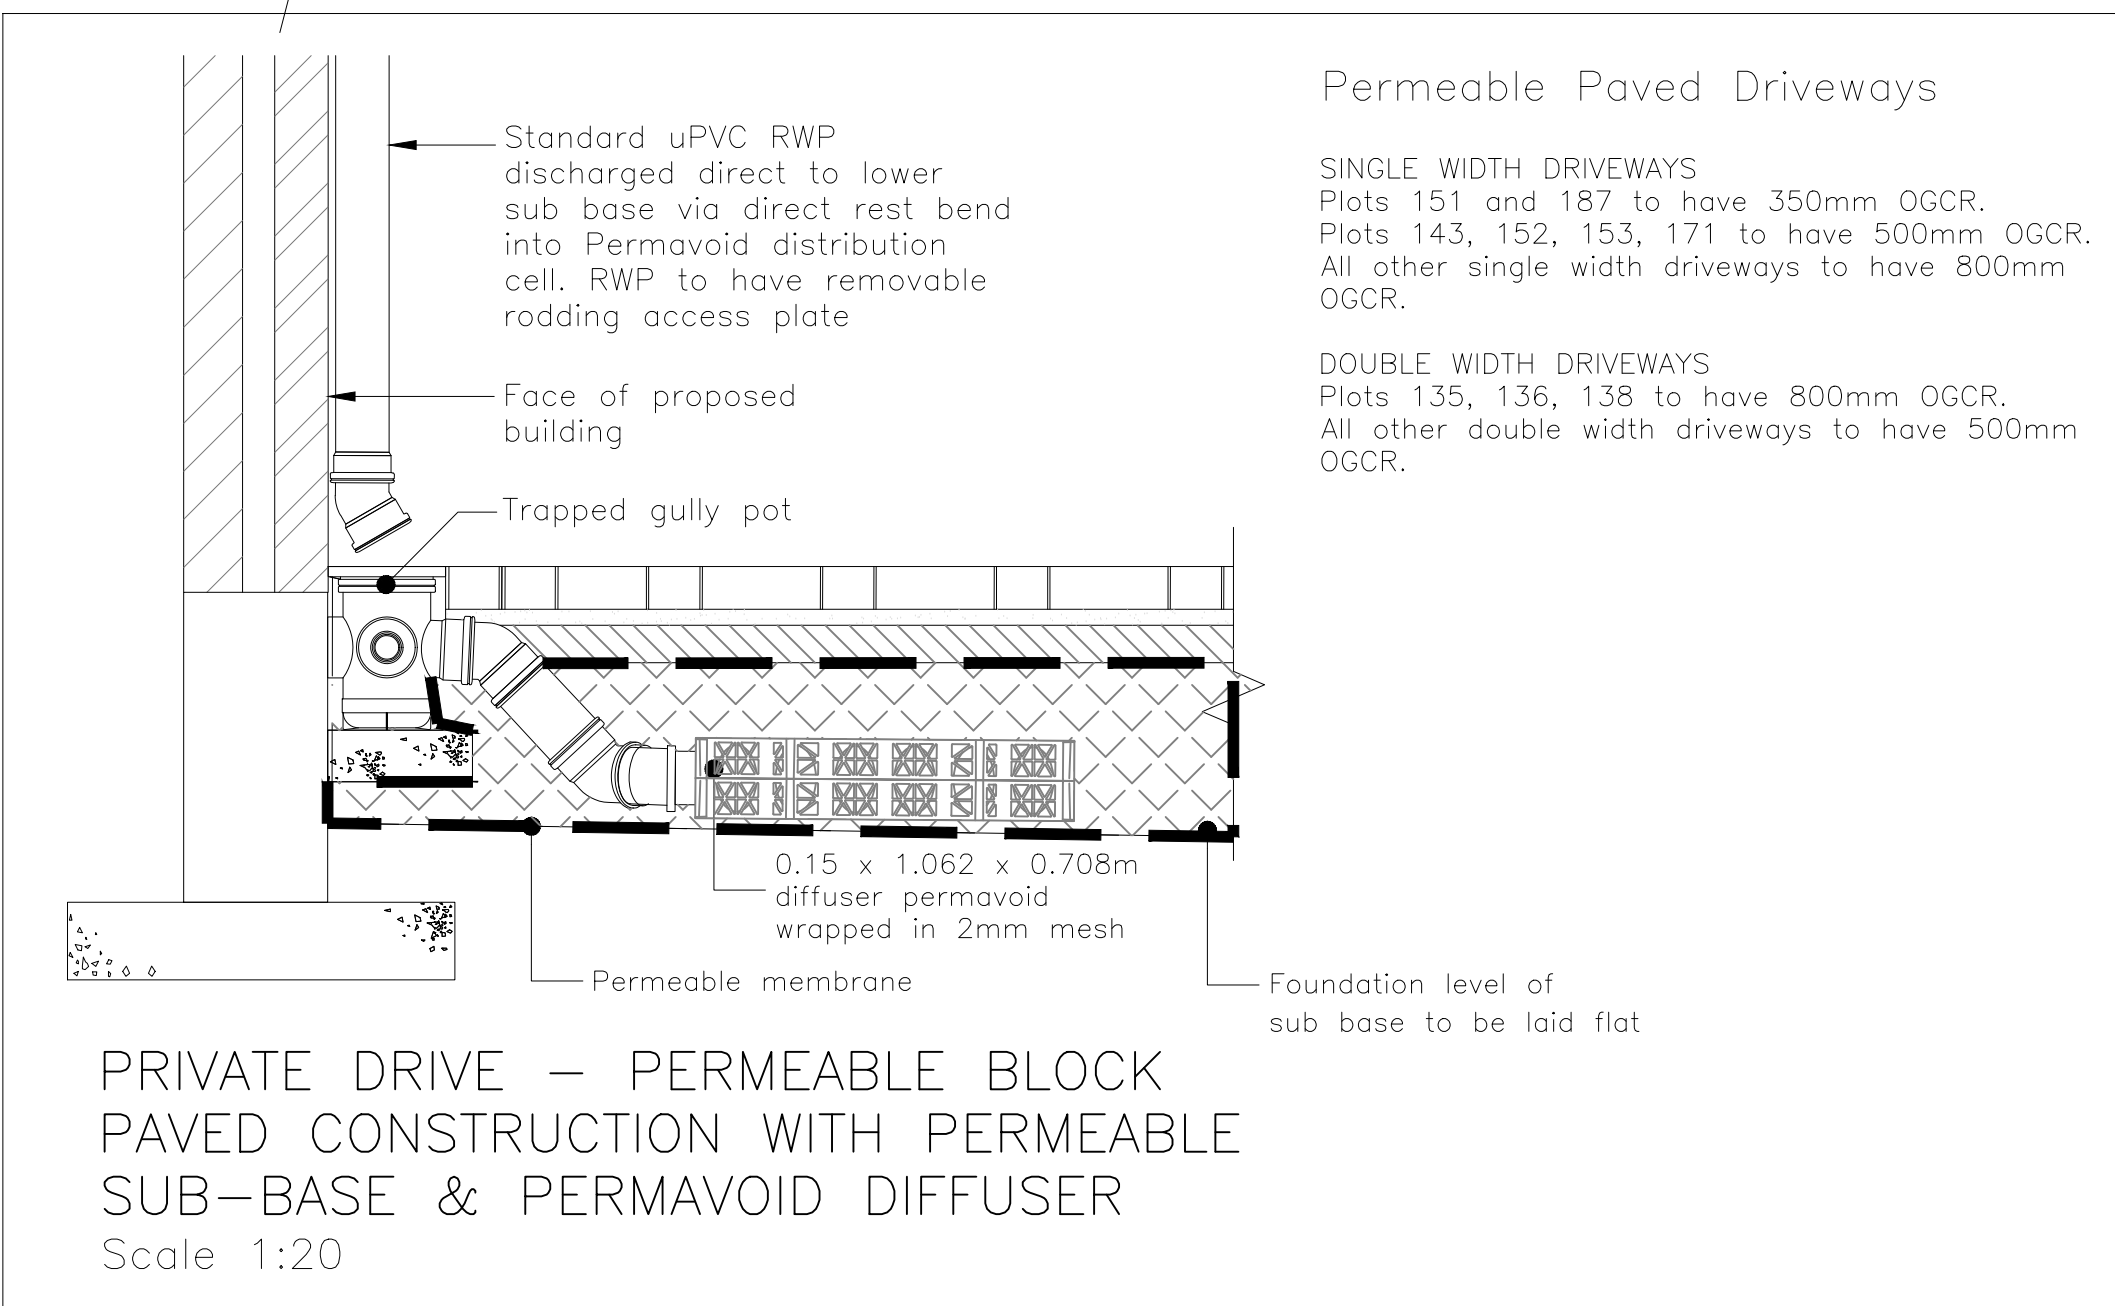


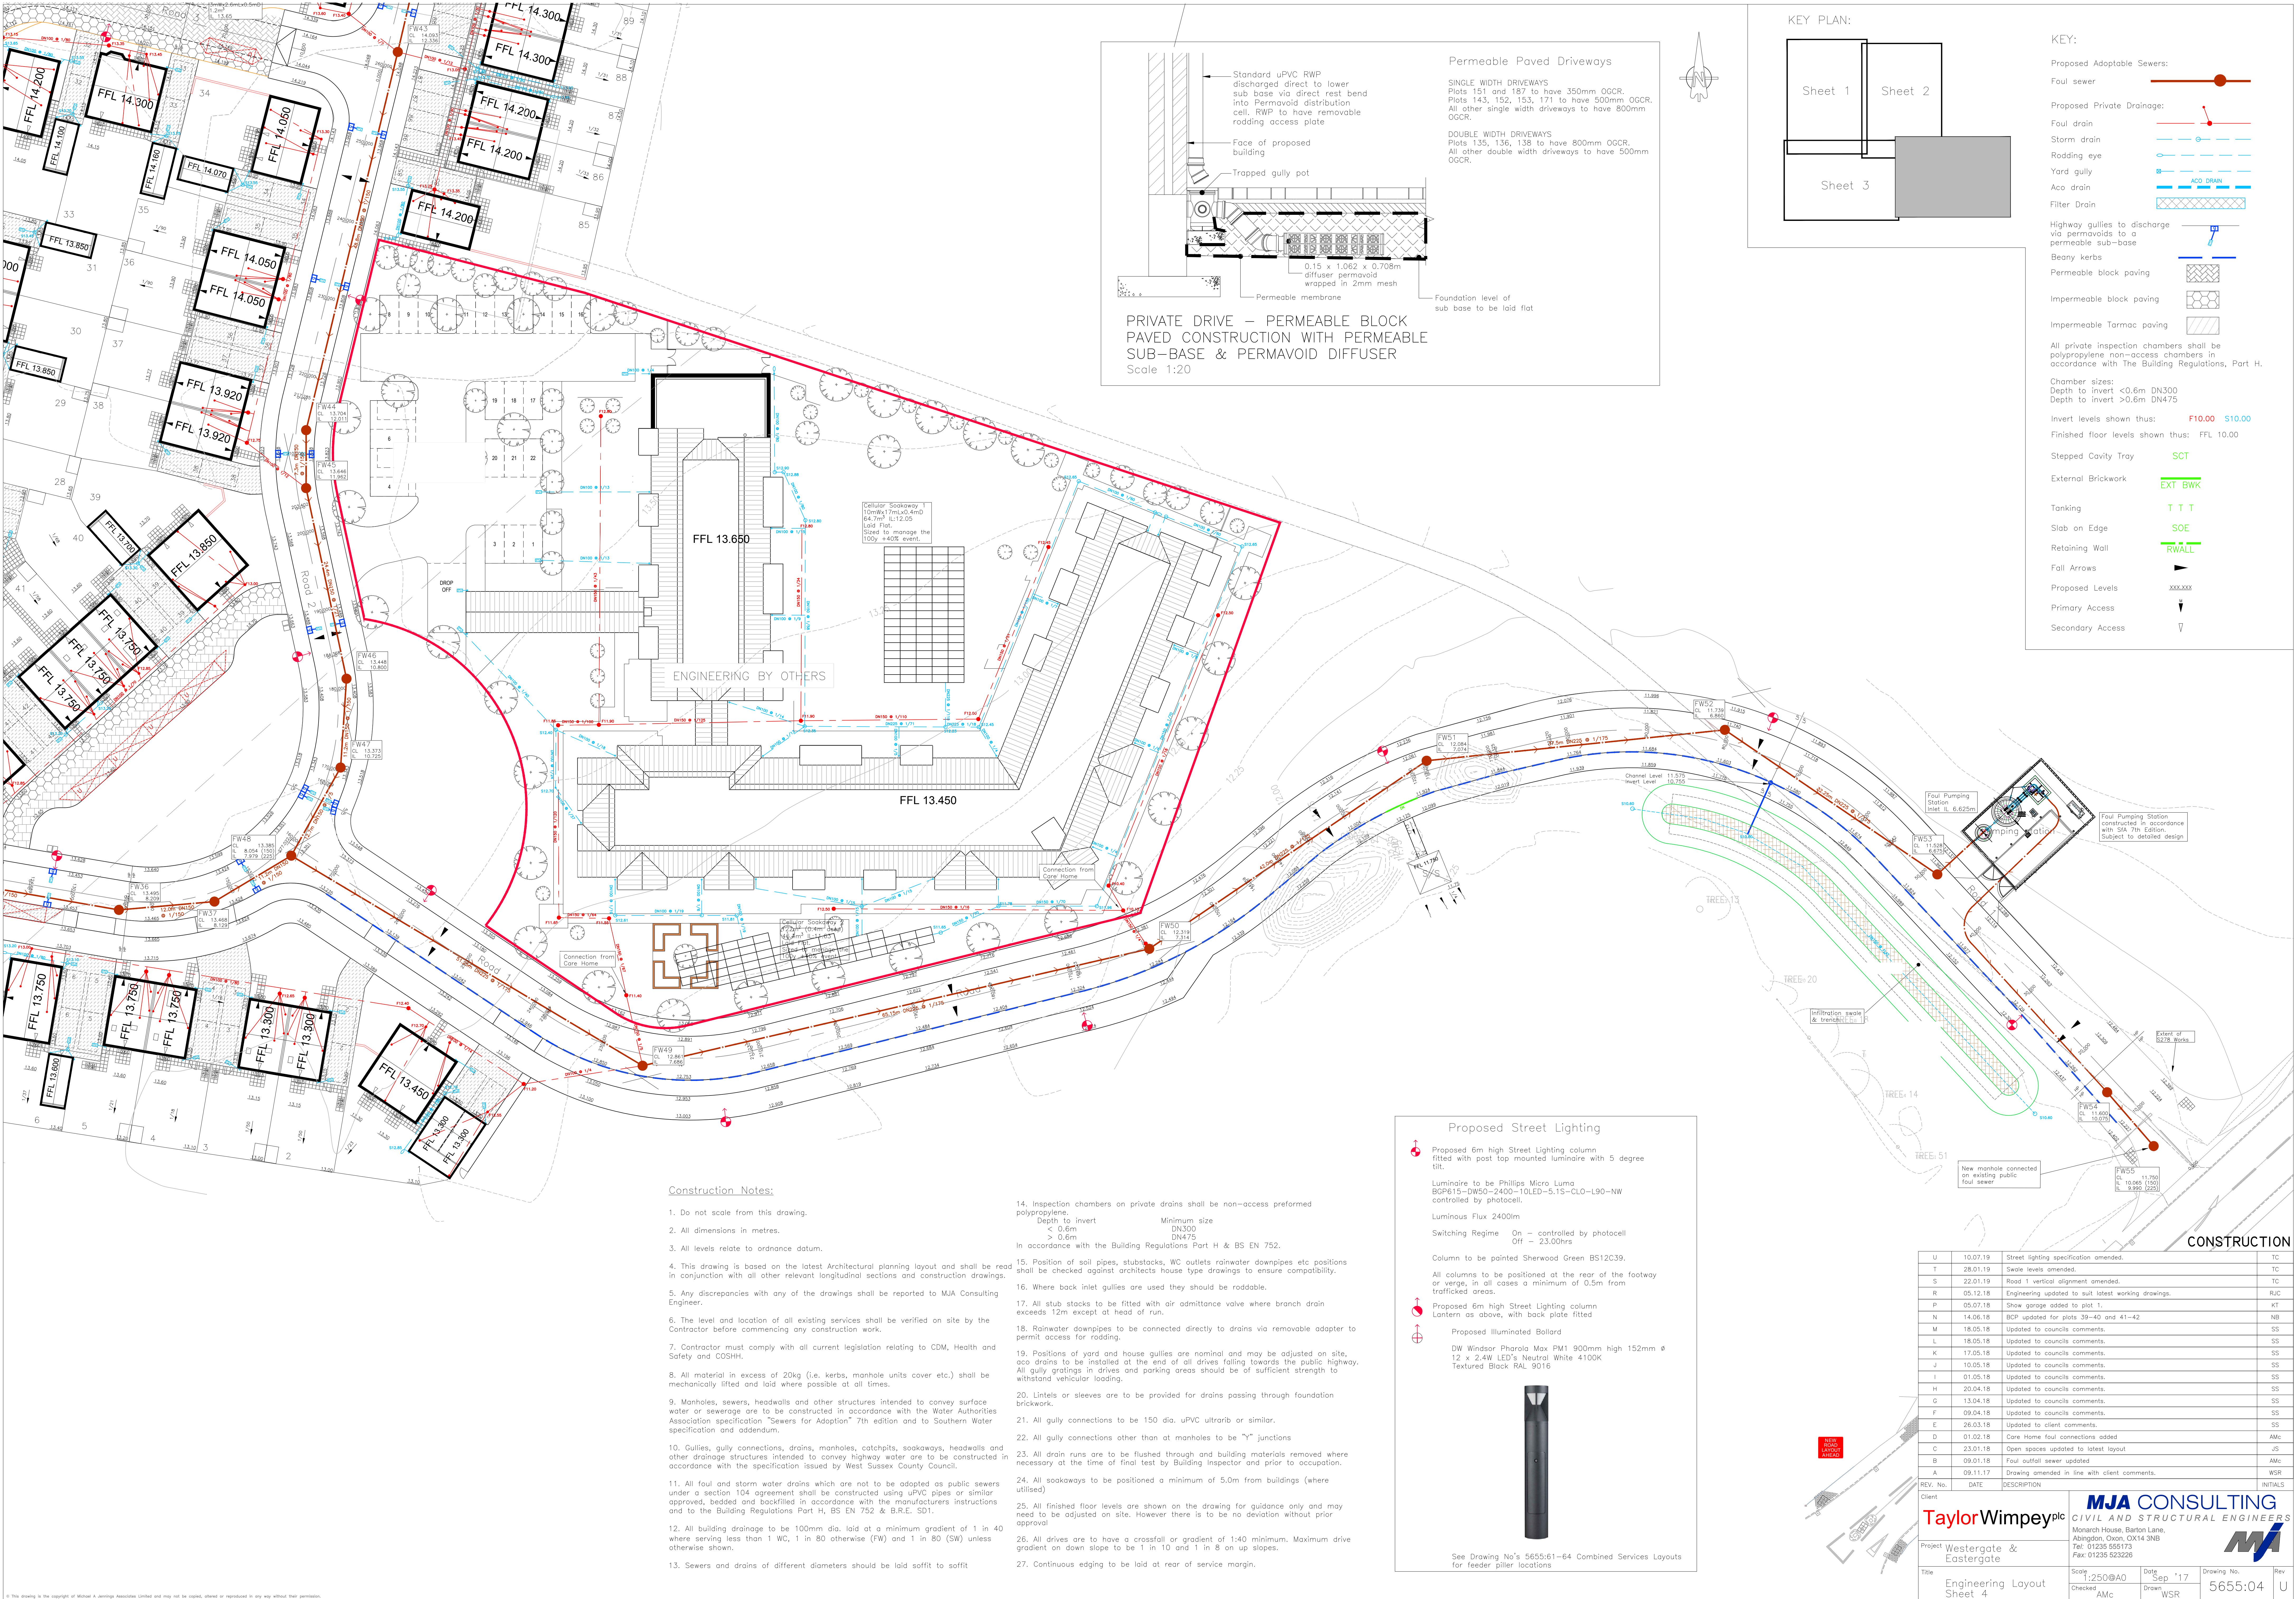

KEY PLAN:

Sheet 1 Sheet 2 Sheet 3

KEY:

Proposed Adoptable Sewers:
Foul sewer

Proposed Private Drainage:
Foul drain
Storm drain
Rodding eye
Yard gully
Aco drain
Filter Drain

Highway gullies to discharge via permavoids to a permeable sub-base

Beany kerbs

Permeable block paving

Impermeable block paving

Impermeable Tarmac paving

All private inspection chambers shall be polypropylene non-access chambers in accordance with The Building Regulations, Part H.

Chamber sizes:
Depth to invert <0.6m DN300
Depth to invert >0.6m DN475

Invert levels shown thus: **F10.00 S10.00**

Finished floor levels shown thus: FFL 10.00

Stepped Cavity Tray **SCT**

External Brickwork **EXT BWK**

Tanking **T T T**

Slab on Edge **SOE**

Retaining Wall **RWALL**

Fall Arrows

Proposed Levels **xxx.xxx**

Primary Access

Secondary Access

Proposed Street Lighting

Proposed 6m high Street Lighting column fitted with post top mounted luminaire with 5 degree tilt.

Luminaire to be Philips Micro Luma BGP615-DW50-2400-10LED-5.1S-CL0-L90-NW controlled by photocell.

Luminous Flux 2400lm

Switching Regime On – controlled by photocell
Off – 23.00hrs

Column to be painted Sherwood Green BS12C39.

All columns to be positioned at the rear of the footway or verge, in all cases a minimum of 0.5m from trafficked areas.

Proposed 6m high Street Lighting column
Lantern as above, with back plate fitted

Proposed Illuminated Bollard

DW Windsor Pharos Max PM1 900mm high 152mm Ø
12 x 2.4W LED's Neutral White 4100K
Textured Black RAL 9016

See Drawing No's 5655:61-64 Combined Services Layouts for feeder pillar locations

- Construction Notes:**
- Do not scale from this drawing.
 - All dimensions in metres.
 - All levels relate to ordnance datum.
 - This drawing is based on the latest Architectural planning layout and shall be read in conjunction with all other relevant longitudinal sections and construction drawings.
 - Any discrepancies with any of the drawings shall be reported to MJA Consulting Engineer.
 - The level and location of all existing services shall be verified on site by the Contractor before commencing any construction work.
 - Contractor must comply with all current legislation relating to CDM, Health and Safety and COSHH.
 - All material in excess of 20kg (i.e. kerbs, manhole units cover etc.) shall be mechanically lifted and laid where possible at all times.
 - Manholes, sewers, headwalls and other structures intended to convey surface water or sewerage are to be constructed in accordance with the Water Authorities Association specification "Sewers for Adoption" 7th edition and to Southern Water specification and addendum.
 - Gullies, gully connections, drains, manholes, catchpits, soakaways, headwalls and other drainage structures intended to convey highway water are to be constructed in accordance with the specification issued by West Sussex County Council.
 - All foul and storm water drains which are not to be adopted as public sewers under a section 104 agreement shall be constructed using uPVC pipes or similar approved, bedded and backfilled in accordance with the manufacturers instructions and to the Building Regulations Part H, BS EN 752 & B.R.E. S01.
 - All building drainage to be 100mm dia. laid at a minimum gradient of 1 in 40 where serving less than 1 WC, 1 in 80 otherwise (FW) and 1 in 80 (SW) unless otherwise shown.
 - Sewers and drains of different diameters should be laid soffit to soffit
 - Inspection chambers on private drains shall be non-access preformed polypropylene.
Depth to invert < 0.6m Minimum size DN300
> 0.6m DN475
In accordance with the Building Regulations Part H & BS EN 752.
 - Position of soil pipes, substacks, WC outlets rainwater downpipes etc positions shall be checked against architects house type drawings to ensure compatibility.
 - Where back inlet gullies are used they should be roddable.
 - All stub stacks to be fitted with air admittance valve where branch drain exceeds 12m except at head of run.
 - Rainwater downpipes to be connected directly to drains via removable adapter to permit access for rodding.
 - Positions of yard and house gullies are nominal and may be adjusted on site, aco drains to be installed at the end of all drives falling towards the public highway. All gully gratings in drives and parking areas should be of sufficient strength to withstand vehicular loading.
 - Lintels or sleeves are to be provided for drains passing through foundation brickwork.
 - All gully connections to be 150 dia. uPVC ultrarib or similar.
 - All gully connections other than at manholes to be "Y" junctions
 - All drain runs are to be flushed through and building materials removed where necessary at the time of final test by Building Inspector and prior to occupation.
 - All soakways to be positioned a minimum of 5.0m from buildings (where utilised)
 - All Finished floor levels are shown on the drawing for guidance only and may need to be adjusted on site. However there is to be no deviation without prior approval
 - All drives are to have a crossfall or gradient of 1:40 minimum. Maximum drive gradient on down slope to be 1 in 10 and 1 in 8 on up slopes.
 - Continuous edging to be laid at rear of service margin.

CONSTRUCTION			
REV. No.	DATE	DESCRIPTION	INITIALS
U	10.07.19	Street lighting specification amended.	TC
T	28.01.19	Swale levels amended.	TC
S	22.01.19	Road 1 vertical alignment amended.	TC
R	05.12.18	Engineering updated to suit latest working drawings.	RJC
P	05.07.18	Show garage added to plot 1.	KT
N	14.06.18	BCP updated for plots 39-40 and 41-42	NB
M	18.05.18	Updated to councils comments.	SS
L	18.05.18	Updated to councils comments.	SS
K	17.05.18	Updated to councils comments.	SS
J	10.05.18	Updated to councils comments.	SS
I	01.05.18	Updated to councils comments.	SS
H	20.04.18	Updated to councils comments.	SS
G	13.04.18	Updated to councils comments.	SS
F	09.04.18	Updated to councils comments.	SS
E	26.03.18	Updated to client comments.	SS
D	01.02.18	Core Home foul connections added	AMc
C	23.01.18	Open spaces updated to latest layout	JS
B	09.01.18	Foul outfall sewer updated	AMc
A	09.11.17	Drawing amended in line with client comments.	WSR

Client

Taylor Wimpey plc

Project Westergate & Eastergate

Title Engineering Layout Sheet 4

Scale 1:250@A0

Checked AMc

Date Sep '17

Drawn WSR

Drawing No. 5655:04

Rev U

MJA CONSULTING

CIVIL AND STRUCTURAL ENGINEERS

Monarch House, Barton Lane, Abingdon, Oxon, OX14 3NB

Tel: 01235 555173

Fax: 01235 523226

MJA