




Ridgewood House
The Ridge
Chipping Sodbury
Bristol
BS37 6AY

Particle Size Distribution Report

Product: 2/6 Gc80/20 Limestone
EN 12620
Material Code: 200225
Supplied by: Whatley
Customer:
Site:
Ticket Number:
Testing Laboratory: Whatley
Material type: BS EN 12620 / Limestone
Job Type: 100/General
Test Method: Dry sieving entire sample
(To BS EN 933-1 : 2020)
Sampled to: BSEN 932-1 : 1997
Prepared to: BSEN 932-2 : 1997

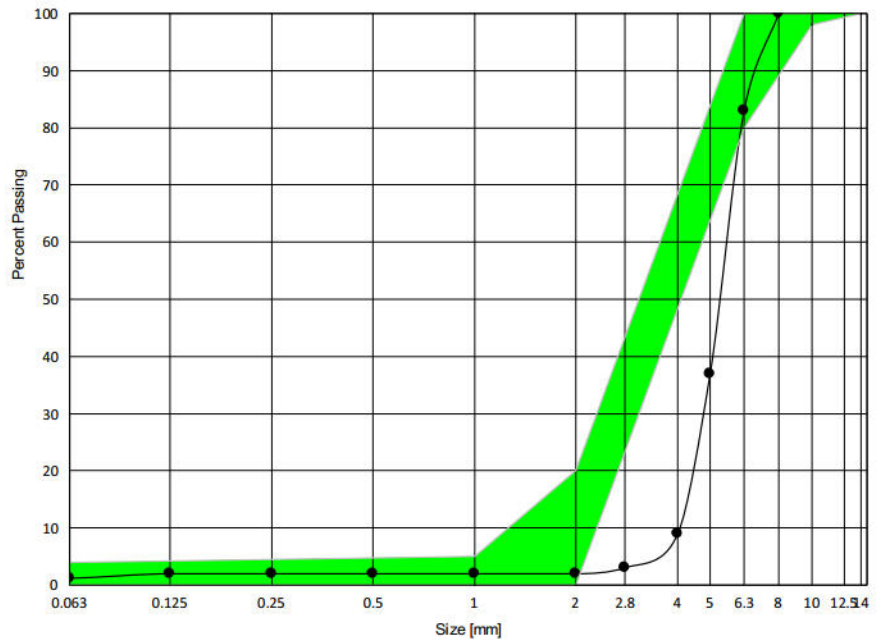

Sample Information	
Sample number	AGG-0109057
Sampled by	Andrew Hill
Date Sampled	23/10/2023
Date Tested	23/10/2023
Sample location	Blend 120
Moisture Content (%)	0.6
Flakiness Index	13
Flakiness Specification	35
Compliance Specification	Yes
Remarks	

Results shown on this report only relate to the sample being tested and at no point did the laboratory deviate from the test method as stated above.

Sieve Size (mm)	Percentage Passing (%)	Spec limits (%)	Complies
20	100	-	-
16	100	-	-
14	100	100	Yes
12.5	100	-	-
10	100	98 - 100	Yes
8	100	-	-
6.3	83	80 - 100	Yes
5	37	-	-
4	9	-	-
2	2	0 - 20	Yes
1	2	0 - 5	Yes
0.5	2	-	-
0.25	2	-	-
0.125	2	-	-
0.063	1.2	0 - 4.0	Yes

Signe

Issue Date :01/11/2023