

Permeable Block Paving Driveline® Piora



20kg CO₂
per m²

DRIVEWAYS

SUDS

Driveline Piora Permeable Paving, Sustainable Urban Drainage System (SUDS) for driveways

- The perfect permeable alternative to Driveline 50
- This permeable paving system features the Marshall's unique patented 'Piora' rib design which allows surface water to pass between blocks into a specially calculated sub-base without compromising the structural performance of the driveway
- Drains water away safely in heavy rainfall without becoming a burden to the local drainage system
- Can help preserve the local water table by rehydrating ground prone to droughts
- If installed with the correct sub-base this permeable paving solution can be used in a front garden without obtaining planning permission
- For co-ordinating kerbs and edgings (see p.152-155)


IMPORTANT Installation Note

The Piora System should not be attempted by the DIY enthusiast or untrained installer. It requires the careful calculation of a soil permeability test and appropriate use of specially graded sub-base aggregates.*

Should an installer wish to undertake training for the installation of this product please call the Marshall's Helpline on 0845 820 5000 for further information.

Visit the Marshall's website to find your nearest Marshall's Register installers trained to install Piora Systems, or call 0845 820 5000.


* See Conditions and Guidelines for use on page 168

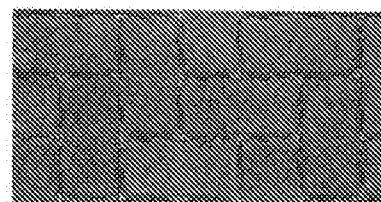


Brindle (BRI)




Bracken (BRA)

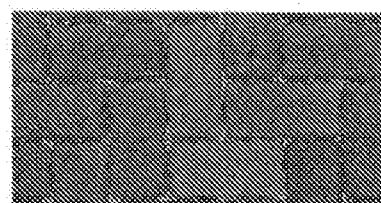

Burnt Ochre (BO)

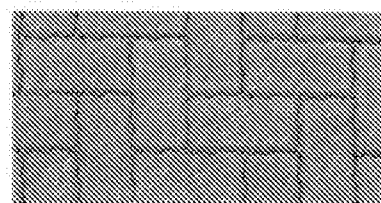

Buff (B)

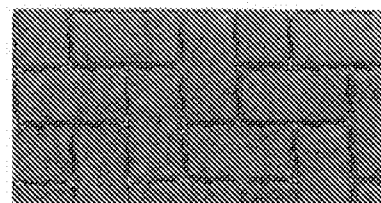

Charcoal (CH)



Red (R)

Driveline Piora	Size mm (nominal)	No./pack	Weight (kg/pack)	Area (m ² /pack)	Colours	kg CO ₂ per m ²
	200 x 100 x 60	404	1115	8.08	BRI, BRA, BO, CH, R, B	20


Driveline Piora concrete block paving


Permeable joint filled with 6mm clean crushed stone

Laying course
50mm depth of
6mm clean
crushed stone

Sub-base 200mm depth of 20mm clean crushed stone with well defined edges

Approx. joint width 6-7mm



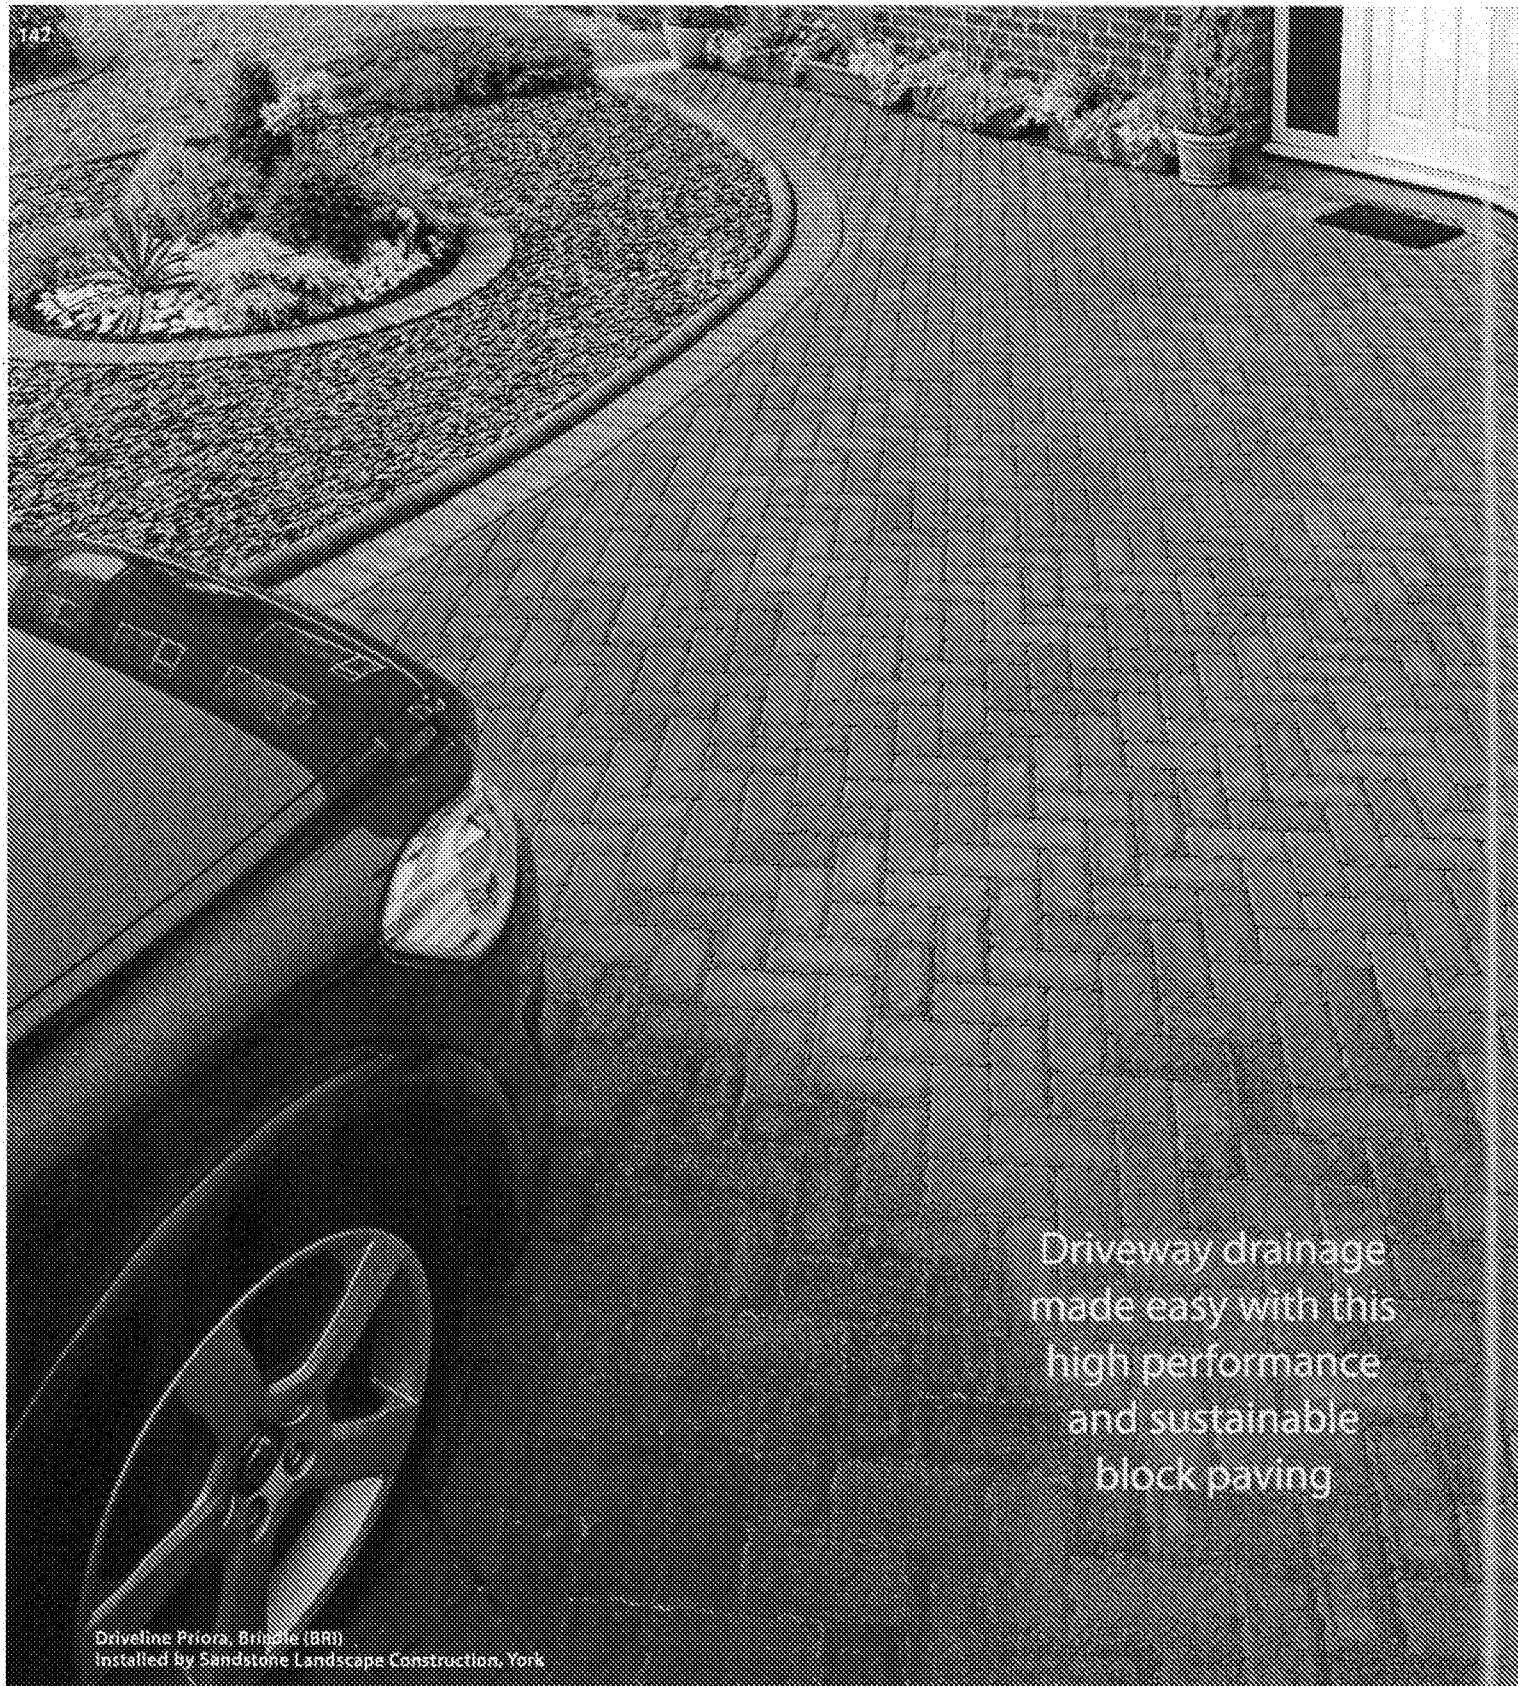

Driveway drainage
made easy with this
high performance
and sustainable
block paving

Driveline Priora, Brindle (BR1)
Installed by Sandstone Landscaps Construction, York



Driveline Priora, Bracken (BR4)



Driveline Priora, Charcoal (CH)