

DESIGN, MANUFACTURE & FINISHING. THE COMPLETE SERVICE.

SPORTS & RECREATION

BOUNDARY DEMARCATION & SAFETY

LOW TO MEDIUM SECURITY

ANTI-INTRUDER

HIGH SECURITY

MAXIMUM SECURITY


**PERIMETER SYSTEMS
PORTFOLIO**



BARKERS FENCING

HIGH PERFORMANCE FENCING SOLUTIONS.

SOLUTIONS FOR WHATEVER SIDE OF THE FENCE



Galvanizing



Powder Coating



Fastener Systems



Quality Management System



Barkers Fencing are a market leading company, manufacturing high performance fencing products to suit every application.

Barkers Fencing are unique in their approach to the fencing market with a start-to-finish package; manufacturing, galvanizing and a state-of-the-art powder coating plant all on one site, plus a team of skilled and experienced professionals whose attention to detail, quality and service is unrivalled in the industry.

Galvanizing provides a long-lasting, tough and low-maintenance zinc coating. Zinc is 100% recyclable and sustainable and prolongs the steel's durability requiring minimal maintenance and service. Our highly trained technical operatives and advanced production facilities operate to the latest galvanizing standard BS: EN: ISO: 1461: 2009, to achieve the highest quality and most reliable galvanized finish. We galvanize for fencing manufacturers, agricultural manufacturers, general engineers and many other industries.

Powder coating provides a tough, durable, but highly decorative finish. Our powder coatings are available in a range of more than 180 colours, matched to BS and European RAL standards and are noted for their mechanical, chemical, and corrosion protection. The very latest digital powder coating technology ensures powder is gently delivered in precise dosing quantities, and then uniformly applied to achieve a distinctly better spray pattern and a surface finish to the latest BS: EN: 13438: 2005 Quality Assurance benchmark. We powder coat for fencing manufacturers, agricultural manufacturers, general engineers and many other industries.

Suppliers of a wide range of standard fasteners, a dedicated range of special fasteners, along with castings, pressings, turned parts, fabricated parts and plastic components, all made to individual customer requirements. Delivery throughout the UK and Ireland can be next day via our own transport or carrier. BS: EN: ISO: 9001: 2008 Quality Management System, guarantees exceptional service.

Barkers Fencing are fully engaged in the continuous improvement of their products. A Quality Management System has been adopted, which complies to the requirements of BS: EN: ISO: 9001: 2008, giving a commitment to continuously improving its effectiveness.

Barkers and the environment.

As a business we are constantly trying to reduce our carbon footprint and are fully committed to reducing the environmental impact throughout the Barkers Engineering Group.

We constantly promote the reduction of waste and the sustainable use of energy by ourselves, members of our

supply chain and others who may be affected by the company's services.

Our on-site galvanizing and powder coating plant enables us to take approximately 25 truck loads off the roads each week, due to us not having to transport manufactured goods to external suppliers.

We will pursue the implementation of environmental commitments in order to ensure our continual improvement, and we are also currently working towards achieving BS: EN: ISO: 14001 accreditation for environmental management.

The specifications shown in this brochure are correct at time of printing.
Barkers Fencing are continually developing their products and reserve the right to change the specifications at any time without notice.



Years of being a market leader has given us the investment capabilities required to continually improve our machinery and capacity. A state-of-the-art laser machine and two robot welders, further enhance our ability to produce a quality product in the shortest possible lead time.

FROM BOARD TO BORDER.



BARKERS FENCING

DESIGN, CONSULTATION & STATE OF THE ART MANUFACTURING

At Barkers Fencing there is a dedicated team of professional perimeter security advisors to assist in all aspects of the tender and specification process.

Design, consultation and specification

At Barkers Fencing we understand how difficult and time consuming it can be to find exactly the right products for each stage of your project.

Fencing design, specifications and requirements are no different. Why not rely on the experts - let us do the hard work for you.

If you have a concept or design, we can create a bespoke system or recommend a solution from our perimeter security range to perfectly match your needs.

We can prepare detailed specification documents and provide complete drawings ready to be inserted straight into your tender documents and sent to your client, main or sub contractors.

And with our network of preferred contractors we can also recommend an approved installer local to your project.





20

VGUARD

BARKERS FENCING MESH SYSTEMS

SCHOOLS, PLAY AREAS, COMMERCIAL BUSINESS, RETAIL OUTLETS




21

PROGUARD

BARKERS FENCING MESH SYSTEMS

SCHOOLS, PLAY AREAS, COMMERCIAL BUSINESS, RETAIL OUTLETS



Designed to add an aesthetic appeal to our mesh fencing product range, a high performance system complete with excellent appearance.

Posts are complete with our unique post hanging bracket which makes VGUARD our easiest to install fence. Most of our customers say they prefer the look of our system as they can install it with no need for any special tools.

AVAILABLE FROM STOCK SEE PAGE 6

Standard sizes

Panel

Height

Width

Panel size

H x W

Wire diameter

V x H mm

Number of beams

Post centres

mm

Post section

mm

1.2	1700 x 400	4mm	2	1000	60x60
2.0	2000 x 2000	4mm	4	1000	60x60
2.4	2400 x 800	4mm	4	1000	60x60
2.4	2400 x 1200	4mm	4	1000	60x60
2.4	2400 x 2000	4mm	4	1000	60x60

Panels
Manufactured using 5mm wire welded at each intersection, complete with pressed beams creating a strong and durable panel. The mesh aperture consists of a 200 x 50mm mesh spacing providing excellent see through visibility.

Post system
Standard posts are manufactured from 60 x 60 x 2.5mm Rolled Hollow Section. All posts include threaded inserts, leaving a clean and flush design to the rear face. Our unique hanging clips makes VGuard exceptionally fast to install. Specially designed PROFIX Securing system brackets are used for quick and easy


installation. As an optional extra, a slotted 40 x 5mm flat clamp bar can be used for additional security.

Applications
The VGUARD system is suitable for most applications where general site demarcation is required. Typical examples: schools, public areas, commercial businesses and retail outlets.

Gates
Standard gates are available or tailored-made to suit your requirements. All gates are supplied with rear hung adjustable hinges, pad-lockable drop-bolts, multi-holed

to suit site conditions complete with anti-climb protection. See our gate range for further details.

Additional security toppings
Barkers Fencing supply additional toppings for security fences including razor wire coils, razor wire tape, barbed wire, rotating spikes. We can also prepare fence posts to take electric security fence on the back and work closely with the major electric security fence manufacturers.



A rigid type system providing excellent visual appearance. Its aesthetic look is especially popular with Architects and Specifiers. Manufactured to BS: EN: 1722 Part 14 – Cat 1 & 2.

Panels
Manufactured using 4mm vertical and 5mm horizontal wires welded at each intersection, complete with pressed beams creating a strong and durable panel. The mesh aperture consists of a 150 x 50/25mm mesh spacing providing excellent see through visibility.

Standard sizes

Panel

Height

Width

Panel size

H x W

Wire diameter

V x H mm

Number of beams

Post centres

mm

Post section

mm

1.2	1700 x 400	4mm	2	1000	60x60
2.0	2000 x 2000	4mm	4	1000	60x60
2.4	2400 x 800	4mm	4	1000	60x60
2.4	2400 x 1200	4mm	4	1000	60x60
2.4	2400 x 2000	4mm	4	1000	60x60

Post system
Standard posts are manufactured from 60 x 60 x 2.5mm Rolled Hollow Section. All posts include threaded inserts, leaving a clean and flush design to the rear face. Specially designed PROFIX Securing system brackets are used for quick and easy installation. As an optional extra, a slotted 40 x 5mm flat clamp bar can be used for additional security.

Applications
The PROGUARD system is suitable for most applications where general site demarcation is required. Typical examples: schools, public areas, commercial businesses and retail outlets.


Gates
Standard gates are available or tailored-made to suit your requirements. All gates are supplied with rear hung adjustable hinges, pad-lockable drop-bolts, multi-holed to suit site conditions complete with anti-climb protection. See our gate range for further details.

Additional security toppings
Barkers Fencing supply additional toppings for security fences including razor wire coils, razor wire tape, barbed wire, rotating spikes.

We can also prepare fence posts to take electric security fence on the back and work closely with the major electric security fence manufacturers.

Posts are complete with our unique post hanging bracket which makes PROGUARD very easy and quick to install. Most of our customers say they prefer the look of our system as they can install it with no need for any special tools.



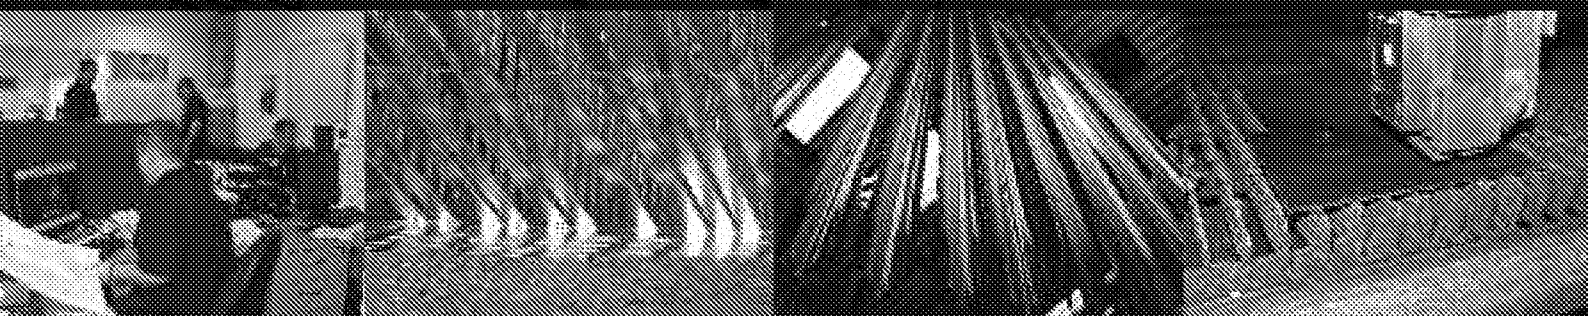

BARKERS FENCING



Duke Street : Fenton : Stoke-on-Trent : ST4 3NS



www.barkersfencing.com



GA

h