


Product Description:

The IP66 Orbital™ bulkhead range is simple yet perfect for bulkhead applications. Engineered with a tough polycarbonate body and opal diffuser for even light output with no LED hot spots, all versions and accessories are impact resistant and designed to last. Available in two wattages, white and black housing, interchangeable eyelid bezels, emergency and microwave options. This range ticks all the boxes for any installation. Life not affected by frequent switching e.g. when used with occupancy controls.

Product Image:

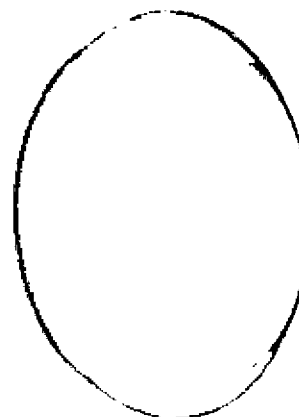


Product Features:


- IP66 LED bulkhead not affected by frequent switching
- IK10 polycarbonate body and diffuser for maximum vandal resistance
- Rear entry access wiring compartment allows for easy installation
- Interchangeable eyelid bezel accessory available
- Separate 20mm conduit side entries
- Wall or ceiling mounted - accessories included
- Emergency and microwave options available
- Adjustable light detector from 2-50 lux
- Adjustable hold time 5 seconds to 30 minutes
- 1.5kV surge protection
- 3 year warranty

25W Polycarbonate IP66 Round LED Bulkhead

Line Drawing Image



Polar Curve Image



Product Specs:

Technology	LED	Lamp Base	None
Number of LEDs	136	Luminaire Distribution	Direct
Lifetime L70 (hrs)	25000	Input Voltage	220-240V AC
Input Frequency	50/60HZ	Surge Protection (kV)	1.5
Power Factor	0.9	Dimmable	No
IP Rating	IP66	IK Rating	IK10
Operating Temp. (Max) °C	40	Positional Adjustment	Fixed
Optic Material	PC	Height (mm)	105
Overall Diameter (mm)	360		

Project..... Comments.....

Fixture Type..... Prepared By.....

Product Description:

Orbital™ 360mm Eyelid Bezel Accessory for EN-BH25


Product Image:

Product Features:

- Interchangeable eyelid bezel
- Available in White or Black finish

Compliance & Approvals:

Product Dimension:

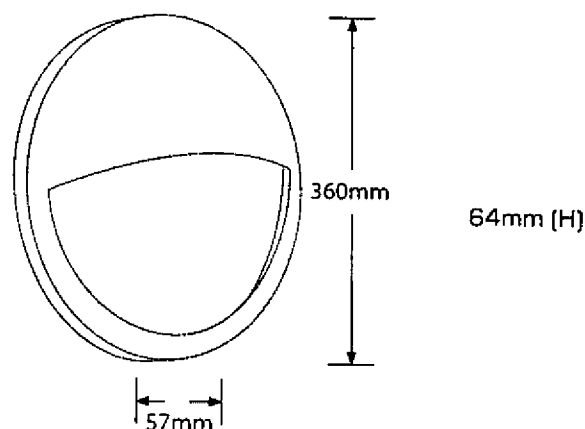

Title

Dimmable	No
Dimensions	mm (L) x mm (W) x 64mm (H) x 360mm (OD) x mm (RD) x mm

SKU Table and Ordering

SKU Code	Product Type
EN-BZE25BLK	Standard
EN-BZE25W	Standard