

Aldingbourne Country Centre Conference Centre

Materials Schedule

HNW Architects

61 North Street, Chichester, West Sussex, PO19 1NB

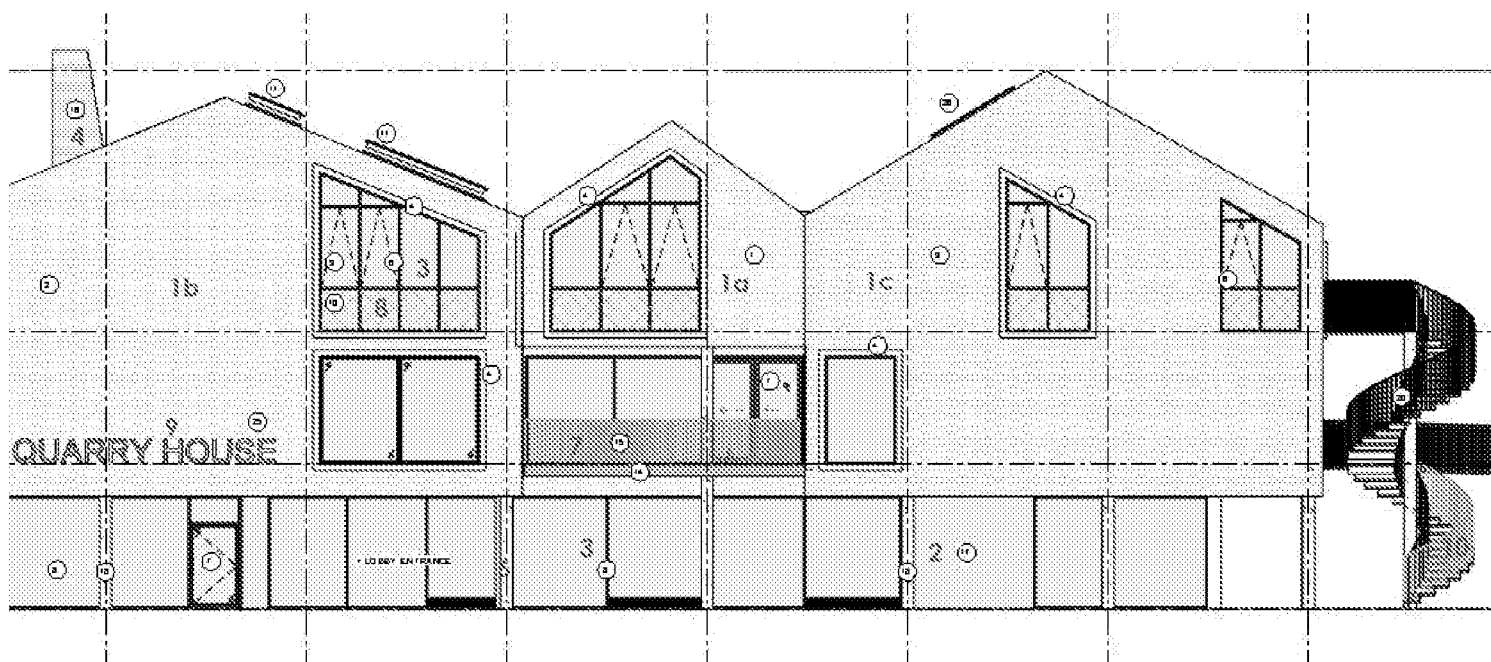
Project **ALDINGBOURNE COUNTRY CENTRE**

Document Title **MATERIALS SCHEDULE**

Document By	SB	Date	Feb 2016
Checked By	DJS	Date	Feb 2016
Project Number	15047	Revision	02


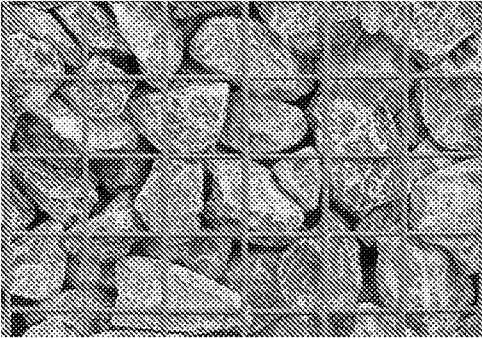
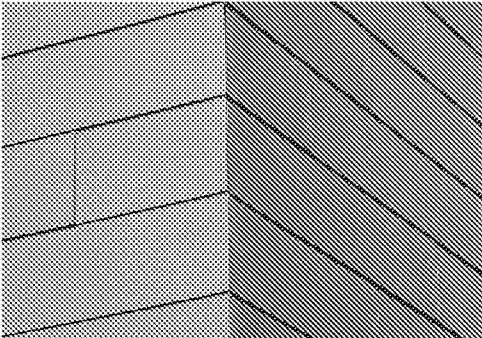
Rev	Amendments	By	Chkd	Date
01	Shingle, Gabion and Glazing Updated	IJS	IJS	27/10/16
02	Chimney, Gabion and Stair Updated	SW	IJS	21/04/17

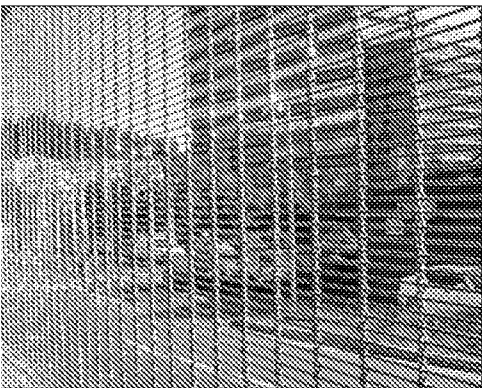
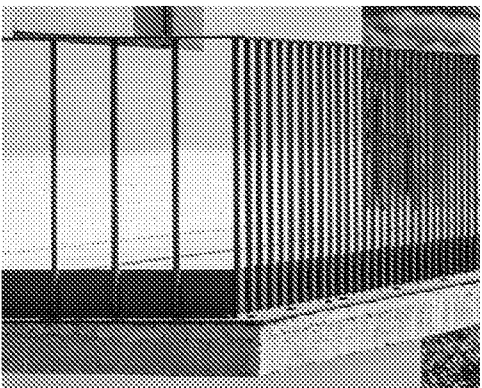
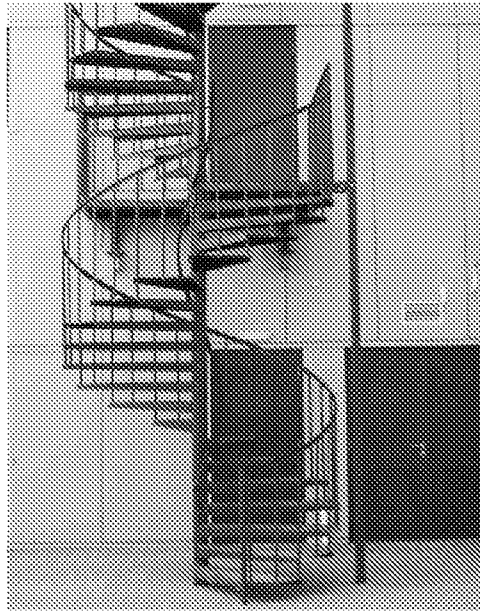
hnw
architects



Material References:

- 1 - Western Red Cedar shingles to walls and roofs. 1a (light brown), 1b (medium brown), 1c (dark brown)
- 2 - Grey stone filled gabion walls
- 3 - Aluminium window and curtain walling frames, polyester powder coated finish. Dark stained timber surround to window bay.
- 4 - Flat seam Zinc Chimney cladding
- 6 - Concrete columns with smooth exposed finish
- 7 - Galvanised steel balustrading with polyester powder coated finish, colour to match window frames and spiral staircase
- 8 - Look-alike-glass to lower portion of glazing for privacy
- 9 - Indicative signage
- 10 - External Spiral galvanised steel staircase with polyester powder coated finish, colour to match window frames and balustrade

Location	Product Details	Image	Notes
External walls to upper floors - all elevations. Pitched roofs. Material reference 1a - light brown 1b - medium brown 1c - dark brown	Western Red Cedar shingles, treated to preserve the timber whilst providing an enhanced colour pigment.	 	Roof shingle colour to match elements of external walls below. Site applied stain. Proposal is 1102, 17 and 1112. Already Approved
Gabion Walls - lower ground floor only Material reference 2.	Dove Grey gabion stone rubble fill		A suitably sized sample could not be obtained as this is a bespoke product. The gabion basket is galvanised steel square mesh with a dove grey gabion stone fill.
Fenestration Framed glazing - all elevations Material reference 3.	Visible grid windows and structural glazing curtain walling Polyester powder coated aluminium Colour RAL 7015		RAL colour panel sample submitted Already approved
Flat seam VE Zinc Chimney- West Elevation Material reference 4.	Dark grey flat seam VE Zinc		The image shown is an example of the intended style.

Location	Product Details	Image	Notes
Brise Soleil Architectural open mesh - East elevation To provide solar shading to entrance lobby. Material reference 5.	Sliding panel in stainless steel 64% open mesh. Potter & Soar 'Adriatic'.		A suitably sized sample could not be obtained, however the image shown is an example of the mesh type proposed in use. Already approved
External balustrades to balcony and walkways Material reference 7.	Galvanised steel balustrading with polyester powder coating finish to match window frames and spiral staircase.		A suitably sized sample could not be obtained, however the image shown is an example of the intended style. Actual colour will be dark grey (RAL 7015, refer to sample panel). Already approved
External Spiral Staircase Material reference 10.	Galvanised steel staircase with polyester powder coating finish to match balustrade and window frames.		The image shown is an example of the intended style.