

GUIDANCE ON HOW VEGETATION SHOULD BE CUT BACK

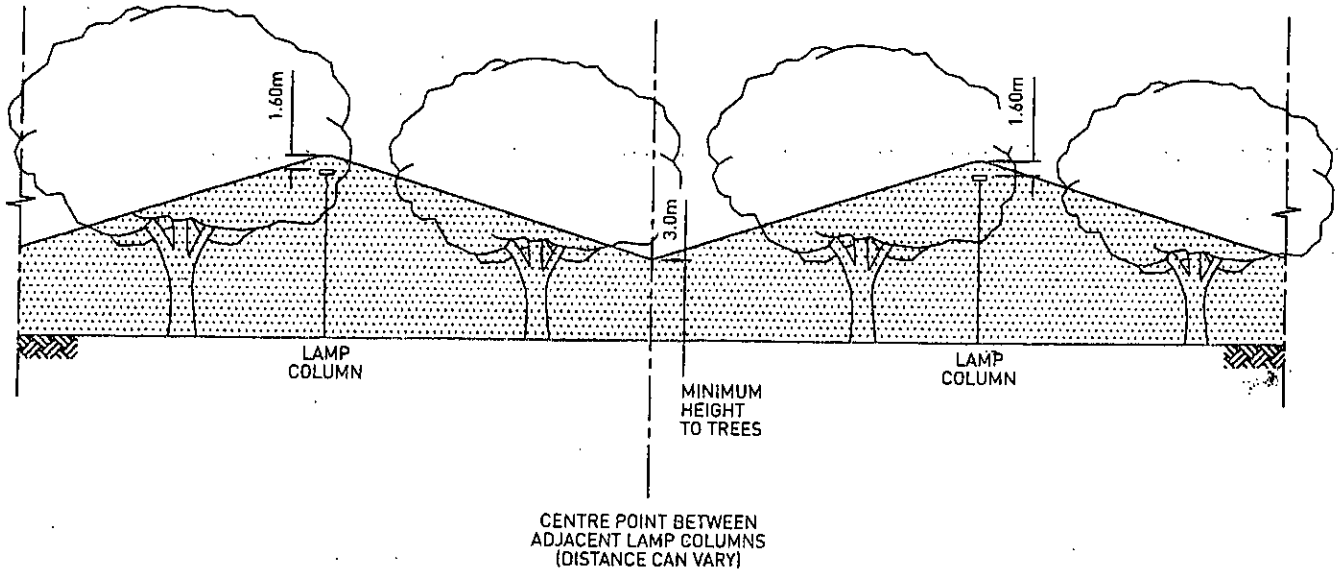

LEGEND

AREA TO BE KEPT CLEAR OF FOLIAGE OR BRANCHES BEHIND THE LINE COLUMNS

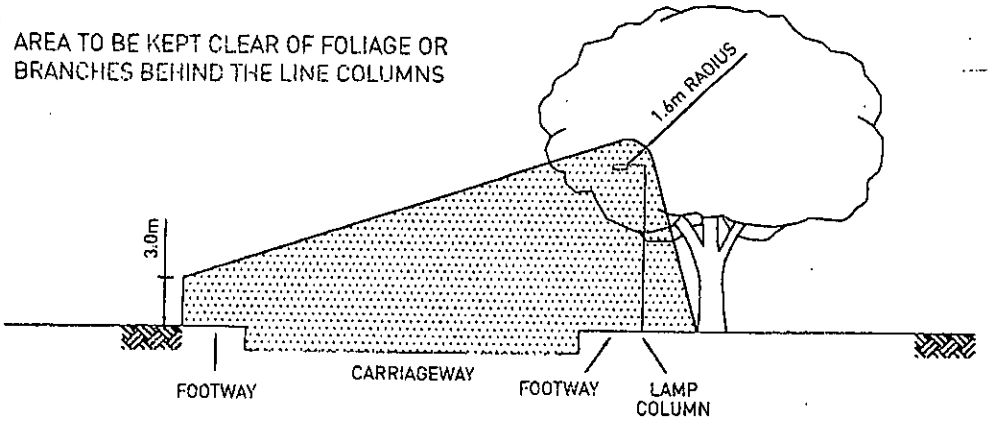

N.B. TREES AND SHRUBS SHOULD BE CLEARED TO AT LEAST 1.6m ABOVE THE COLUMN AND BACK BEHIND THE LINE OF THE COLUMNS

1. REMOVE OR SHORTEN BRANCHES INTERFERING WITH STREET LIGHTING TO PERMIT UN-OBSTRUCTED ILLUMINATION OF THE CARRIAGEWAY AND FOOTWAY AND PREVENT ANY OBSTRUCTION OF LIGHTING COLUMNS. LAMP TO BE VISIBLE FROM CENTRE POINT BETWEEN COLUMNS. CLEARANCE TO BE SUFFICIENT TO BE EFFECTIVE FOR AT LEAST 12 MONTHS.
2. WORK TO CONFORM TO BS 3998 : 1989, ALL ARISINGS TO BE REMOVED FROM SITE.

SSE Contracting

Working in partnership with

west sussex county council