ARUN DISTRICT COUNCIL **Date:** 22/06/2016

ADC PARKS & GREENSPACE ARBORICULTURE

FROM: Dafydd Lloyd **TO:** Richard Temple

PLANNING APPLICATION: AW/151/16/TC

ADDRESS: Verge in front of 1 The Drive Aldwick PO21 4DU

BRIEF DESCRIPTION: Fell 1 No. Holm Oak tree & reduce boughs over highway by up to 3m to 1 No. Holm Oak tree within the Craigweil House Conservation Area.

INSPECTION DATE: 22/06/2016

RECOMMENDATION:

Objection	☐	No Objection	x	Split Decision	☐
Comment	x	Recommendation	x	Suggested Conditions	☐
Tree Replacement	☐	**Dead/Dangerous**	☐	CA & Amenity Value	☐

G1 Species: Holm Oak *Quercus ilex* **Height:** 10 meters **Average Branch Spread:** 3 meters **Crown Condition:** fair **Form:** fair **Age Class:** semi mature

T2 Species: Holm Oak *Quercus ilex* **Height:** 16 meters **Average Branch Spread:** 7 meters **Crown Condition:** fair **Form:** fair **Age Class:** mature

Comments:

- The specimens outlined in this application are located on grass verge outside the front of 1 the drive Aldwick.
- For **G1**, the applicant has applied to re-coppice the three stems to stool level. The applicant has cited the unions between stems and the host stool being poor.
- For **T2**, the applicant has applied to reduce the western spanning limbs by up to 3 meters over the abutting highway (barrack lane). From the site inspection it was evident that **T2** has received previous reduction/s that emulates the proposed reduction operation.

Recommendation:

- For **G1**, I would have no objection to the proposed re-coppicing of the three stems to form a coppice stool.
- For **T2**, I would have no objection to the reduction of the western lateral extensional growth by no more than 3 meters.

Dafydd Lloyd
Arun District Council
Tree Officer

Figure 2 **Positions of final cuts**

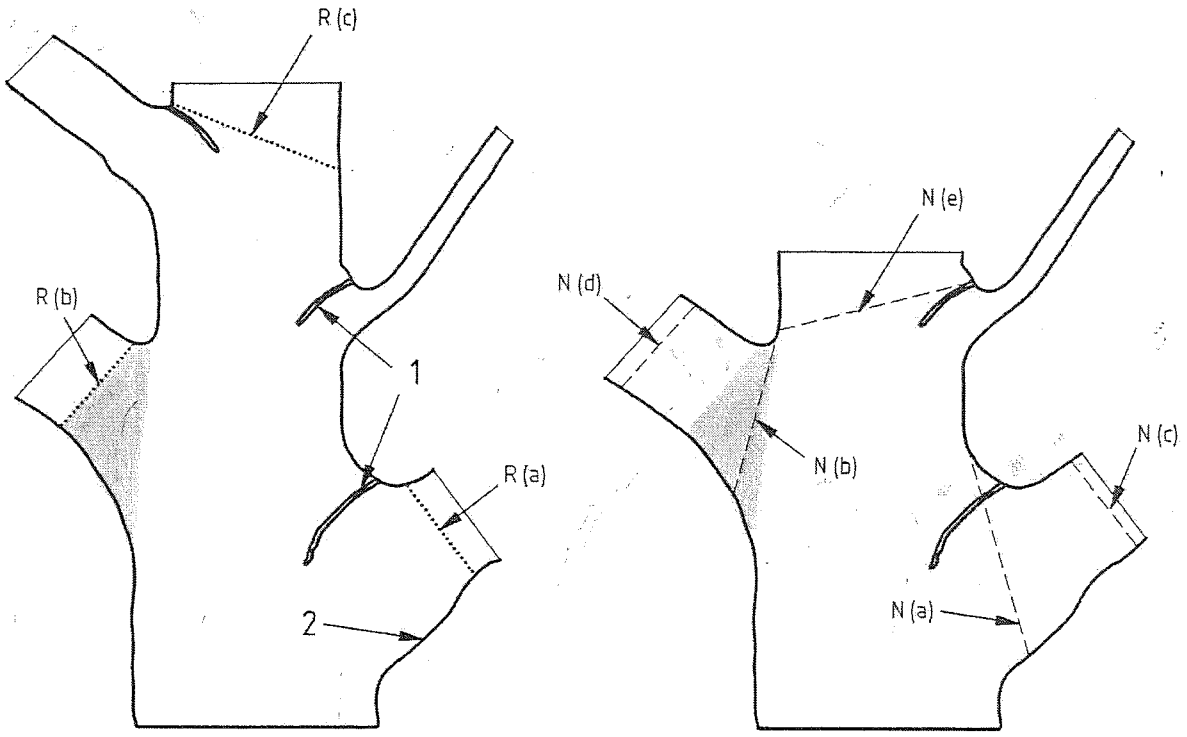

a) Recommended (R) b) Not recommended (N)

Key

1	Branch bark ridges
2	Branch collar
R(a)	Cut where branch collar and branch bark ridge are apparent
R(b)	Cut where neither branch bark ridge nor branch collar are apparent
R(c)	Position for end-cut in crown reduction – maximum size of cut in relation to size of lateral branch
N(a)	Cut too close (removing the branch collar and cutting into the bark branch ridge)
N(b)	Cut too close (injuring parent stem in the crotch and too steeply angled)
N(c/d)	Cut too far out, leaving a stub (but see C.2, Note 2 for exceptions)
N(e)	Incorrect end cut (made beyond a branch that is too small, but see 7.2.4 regarding groups of branches, rather than one branch of a required size)
·····	Recommended cut
– – – –	Not recommended cut
▭	Basal flare of the branch that does not show a distinct collar or ridge

NOTE The optimum position and angle of the end-cut cannot be exactly prescribed, as branch unions vary considerably in their conformation.

ARUN DISTRICT COUNCIL AW/151/16/TC

When specifying crown reduction and/or reshaping to create clearance from another structure or tree (see **7.8** and **7.9**), the points between which the clearance will be measured should be stated.

Figure 4 **Diagrammatic illustration of crown reduction**

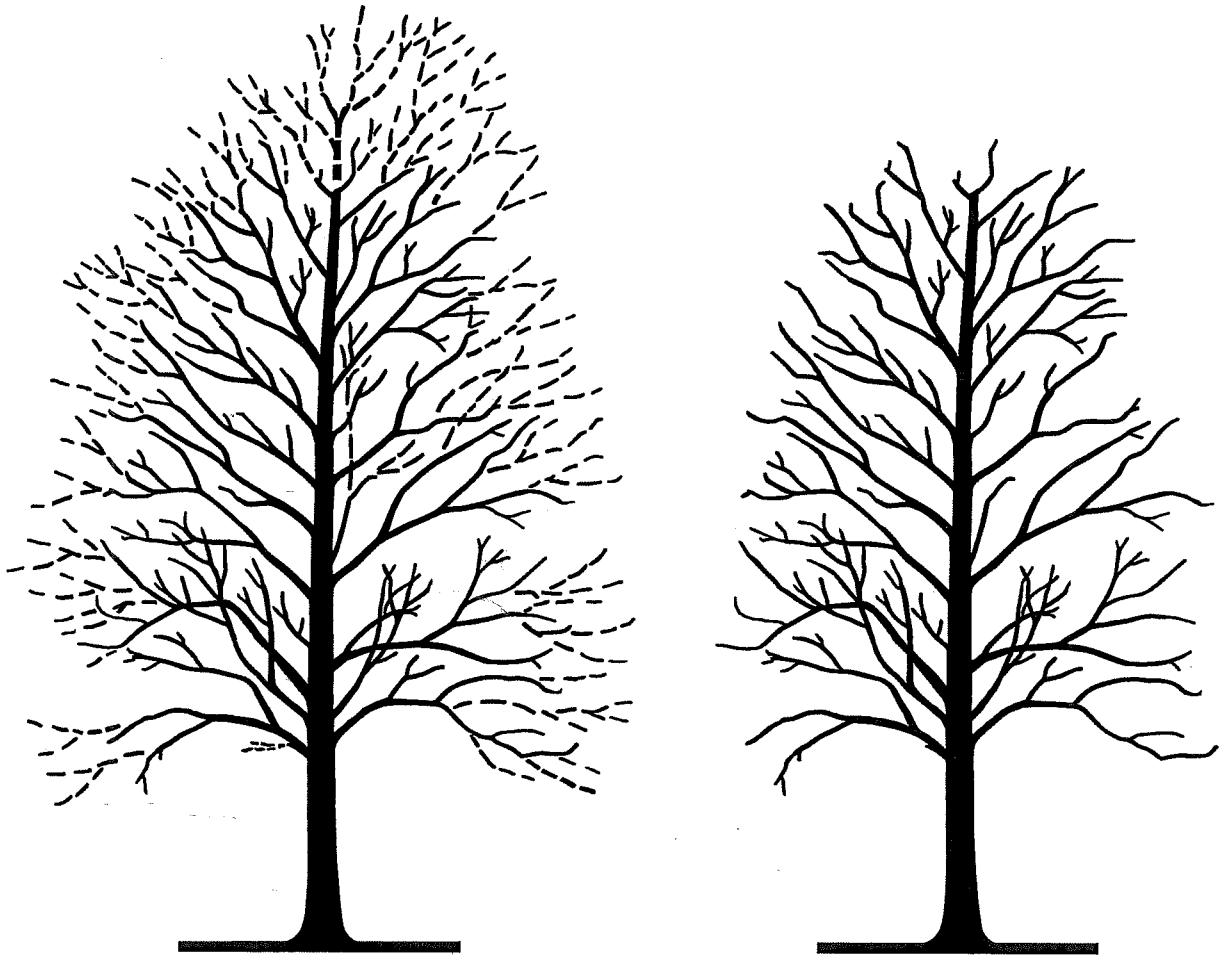

a) Before crown reduction, showing material to be removed

b) After crown reduction

7.7.3 Follow-up work after crown reduction or reshaping

Following crown reduction or reshaping, the crown should generally be managed in accordance with one of the following objectives:

- to continue a phased programme of further crown reduction (see also Annex C);
- to maintain the reduced crown as a framework for cyclic management, whereby the new branches are periodically cut back close to their points of origin (as in pollarding; see **7.10**);
- to establish a new framework by "shoot renewal pruning", so that the crown attains a relatively natural appearance but remains smaller than before the reduction or reshaping.

To achieve the last of the above objectives, the new branches should be tip-pruned and thinned so as to encourage the growth of secondary branches, which should in turn be pruned and thinned as required to maintain the desired shape, size and density of crown.

ARUN DISTRICT COUNCIL AW/151/16/TC