




Block Plan 1 : 500

Drainage
below ground drainage to BS 8301
100mm diameter pipes laid to falls
minimum 1 : 80 plastics (1 :40
clayware) with inspection chambers
at a change in direction

65mm dia upvc rwp above ground
to 100mm dia plastics drain run
laid to falls to local soakaways
minimum 5000mm from buildings
minimum 2.0m³ below invert
soakaway design is to be based on
site specific percolation tests -
adopt attenuation chamber crates
to suit area to be drained with
geotextile membrane wrapped all
round

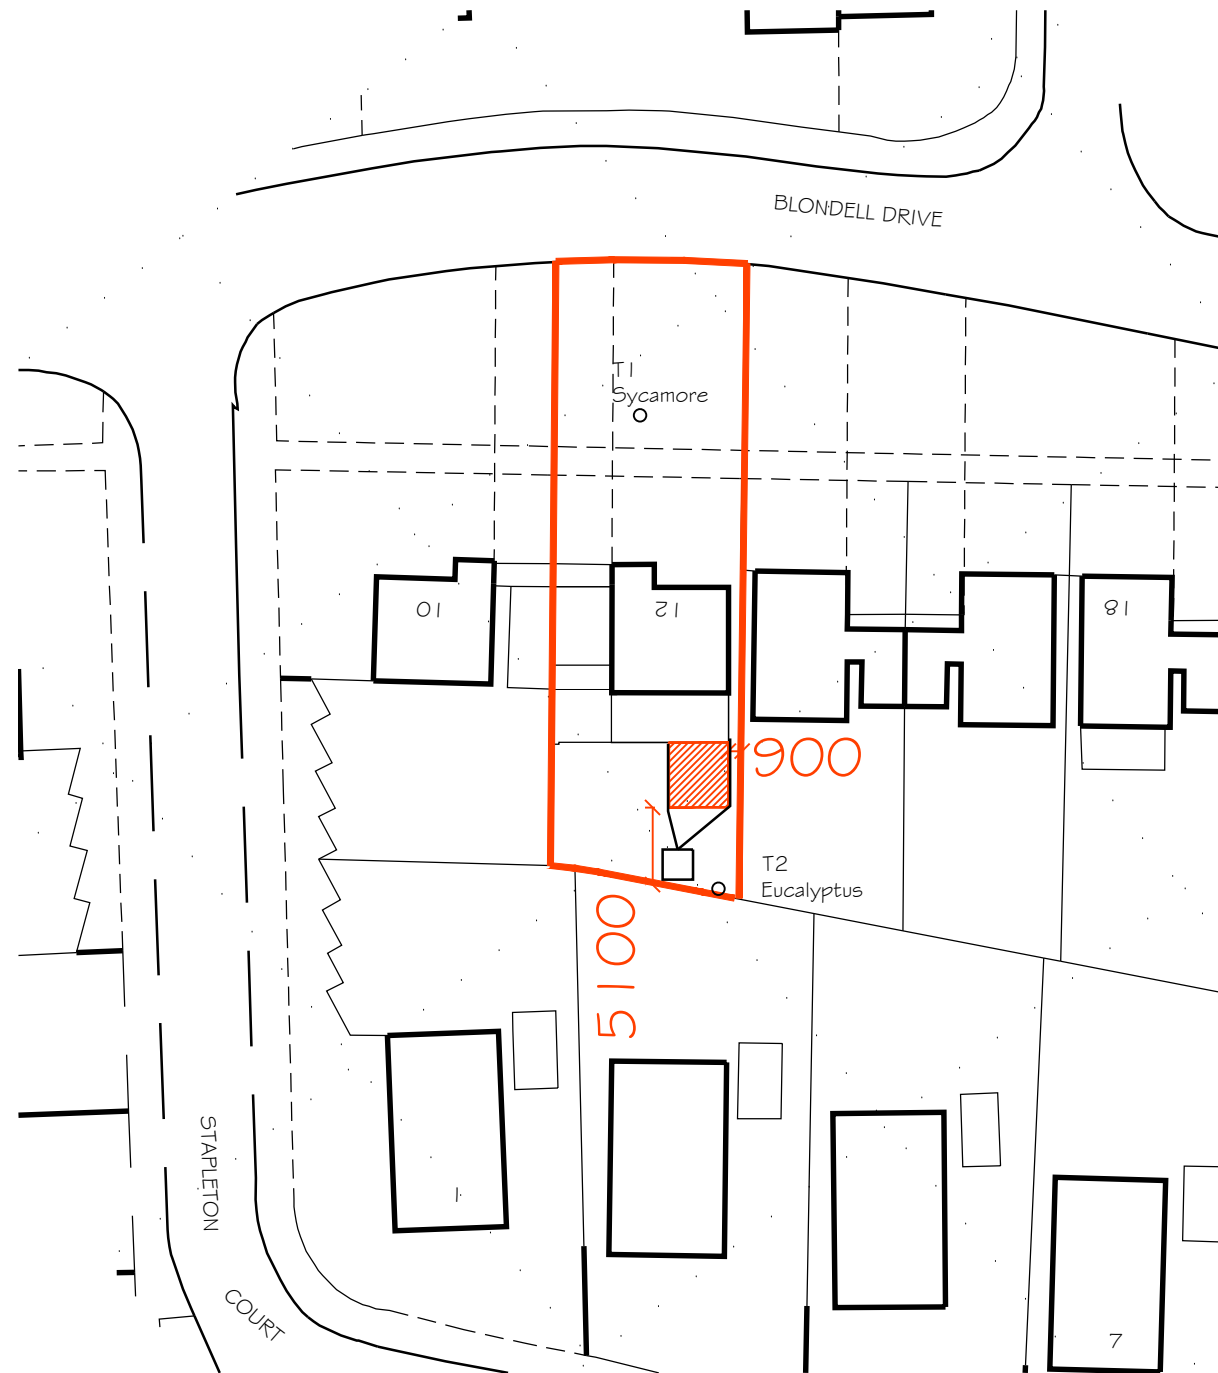

Location Plan 1 : 1250


NOTES:

Dimensions to be checked on site before placing material orders or commencing work.
Any discrepancies shall be reported immediately.

Do not scale from these drawings except for planning purposes.
Use figured dimensions only.

Where applicable this drawing is to be read in conjunction with other consultants' drawings.

This drawing is the copyright of hda projects ltd.



Rev	Date	Amendment
-----	------	-----------

hda projects

St Johns House - St Johns Street
Chichester - West Sussex - PO19 1UU

Tel: 07881287017
e-mail: hdaprojects@talktalk.net

For
Mr+Mrs J Latham

Project
**12 Blondell Drive
Bognor Regis
West Sussex
PO21 4BQ**

Title
Block and Location Plans

Date	Drawn	Scale	Checked
May 2020	wm	1250 + 500 @ A3	
Job Number	Prefix	Drawing Number	Revision
2020 24	P	01	A