


Flood Risk Assessment for 120, Barrack Lane, Aldwick.

Site Flooding Context:-

The property is located in Zone 2 of the EA Flood Map and therefore deemed to be in 'at risk' area as the plan below:-

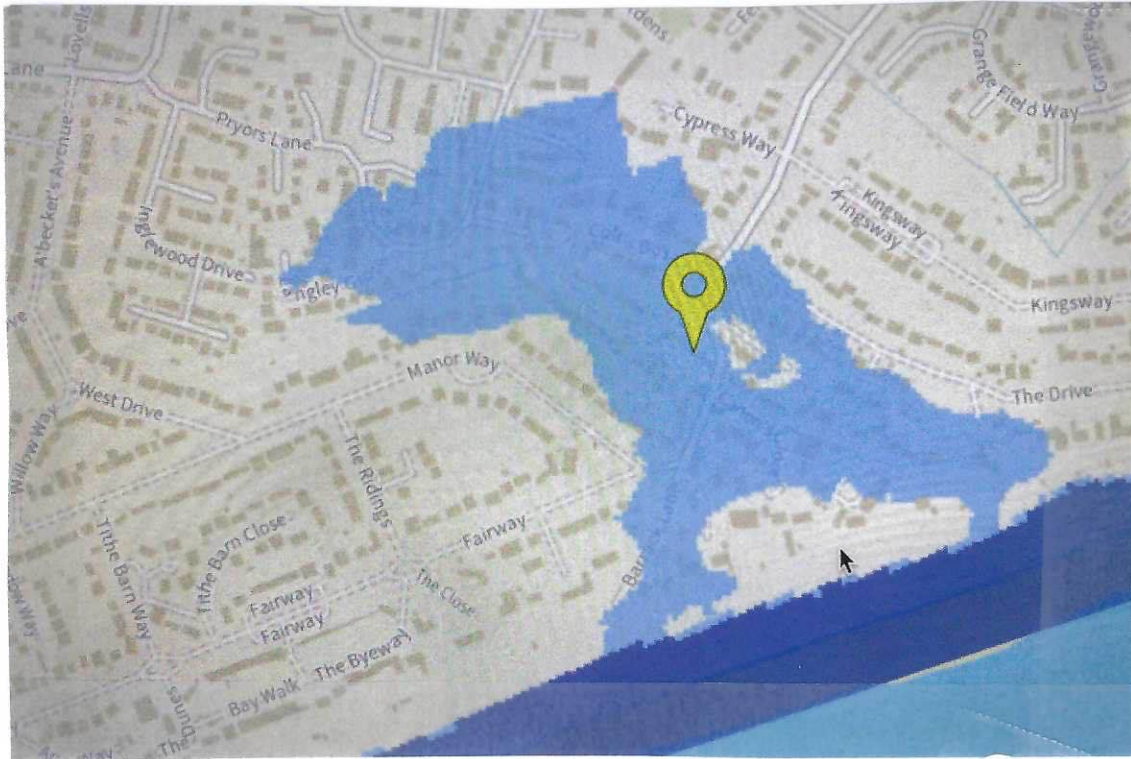

The site is vulnerable to flooding with the existing main dwelling surface water drainage dealt with by soakaways and the proposal does not change this.

The probability of the site flooding is 1 in every 100 years although with climate change this is likely to increase.

Mitigation:-

The existing floor levels of the main dwelling are set 400mm above ground level and the new extension floor level will run continuously with the existing thus maintaining the 400mm from floor level to ground level.

The majority of existing front external surface areas are all porous surfaces [gravel] with 80% of the rear garden laid to grass.

Proposed Flood Protection:-

Limited possible changes to flood protection are available so therefore a proportionate nature and scope has be considered.

A small rear patio area will be carried out under the proposal.

Although the new and existing floor levels will be 400mm above ground level flood proofing of the extension is still deemed to be important as part of building work to improve protection.

These measures will provide additional resistance to the entrance of flood water and consideration has also been given to the type of materials used in relation to the absorbent nature of the material and its ease of replacement and drying out should flooding occur.

It is not required as part of these recommendations for the proposal to consider the flood preventive qualities of the existing property.

The effectiveness of the flood proofing is very reliant upon the quality of the installation and good building practice.

Floor:-

Provide 100mm solid concrete floor. Provide 250mu polythene barrier with fully taped joints between oversite fill and oversite slab with polythene lapped over internal skin of cavity wall below d.p.c.

Provide cement/flooring grit screed with added waterproofer on 3 coats of liquid d.p.m. solution.

External Walls:-

Provide polythene cavity tray with fully taped joints between both trays and polythene barrier below slab.

Provide protection to the external skin of cavity wall with waterproofer added to the render mix to resist absorbing of any water.

Provide low absorbing insulation cavity wall batts within a 500mm band.

Provide stainless steel cavity wall ties.

Provide waterproofing sealant to internal face of internal blockwork to 500mm high band with cement/sand render with added waterproofer and set coat.

Door Floodboards:-

Increased flood protection is by 600mm high plastic OR aluminium floodboards in watertight channels are fixed to door frames in event of possible flood warning.

General:-

Skirting boards to be fixed to internal walls with adhesive.

Evacuation Plan:-

A personal evacuation plan and strategy is to be put in place through the filling out the relevant Environment Agency 'Personal Flood Plan' form and forming a strategy including:-

- Move furniture and electrical items to safety.
- Put flood boards, polythene and sandbags in place.
- Make a list now of what you can move away from the risk.
- Turn off electricity, water and gas supplies.
- Roll up carpets and rugs.
- Unless you have time to remove them hang curtains over rods.
- Move sentimental items to safety.
- Put important documents in polythene bags and move to safety.
- Move car to a safe location.
- Inform family and friends of any evacuation plan.