

Josh Street

From: Kennett, Darren [REDACTED]
Sent: 11 September 2014
To: Peter Cleveland
Subject: Ref: A/82/12/ Land to East Roundstone lane Angmering - Condition 11
Attachments: Construction Method Statement - 9 Sep 2014.doc; Construction Management Plan - Angmering.pdf

Dear Peter,

Condition 11 – Construction Management Plan

Please find enclosed the Construction Method Statement and Management Plan Rev. B is attached to show a temporary area to be used whilst the show arena and main compound is set up.

Many Thanks

Darren

The sender of this e-mail is a member of the Barratt Developments group of companies, the ultimate parent of which is Barratt Developments PLC (company number 00604574).


Barratt Developments PLC is registered in England and Wales with its registered office at Barratt House, Cartwright Way, Forest Business Park, Bardon Hill, Coalville, Leicestershire, LE67 1UF, together with its principal subsidiaries BDW Trading Limited (03018173), David Wilson Homes Limited (00830271) and Wilson Bowden Developments Limited (00948402). BDW North Scotland Limited (SC027535), also a principal subsidiary, is registered in Scotland and has its registered office at Blairton House Old Aberdeen Road, Balmedie, Aberdeenshire, AB23 8SH.

This e-mail message is intended only for use by the named addressee and may contain privileged and/or confidential information. If you are not the named addressee you should not disseminate, copy or take any action in reliance on it. This communication is subject to contract and not intended to create legal relations between the sender and the recipient. Please view our 'Email Addendum v1' at <http://www.barratcommercialsupport.co.uk> for further details.

Construction Method Plan
for Land East of Roundstone Lane,
Angmering

Rev B. 09.09.2014

DAVID
WILSON
HOMES



Little details. **Big difference.®**

Contents

The construction method statement covers the following aspects:

1. David Wilson Homes Safety, Health and Environmental Management Systems (SHE)
2. Temporary access from Roundstone Lane
3. Parking for site staff and visitors
4. Construction traffic routing plus Loading and unloading
5. Storage of Materials
6. Security hoarding and decorative displays
7. Wheel Washing
8. Controlling emissions of dust, fumes and dirt
9. A scheme for recycling/disposing of waste
10. Hours of work on site
11. Condition Survey of Existing Highway
12. Construction Traffic
13. Public Engagement
14. Number, type and frequency of vehicles to be used during the construction.

Appendices

Appendix A – Construction Management Plan

1. Barratt Homes Safety, Health and Environmental Management Systems (SHE)

Barratt Development PLC operates the Occupational SHE Management Systems across the group to set out and maintain high standards in Health, Safety and Environmental standards. With dedicated SHE Managers responsible for monthly inspections and auditing of Construction Sites throughout the Barratt Group this system is supported by Divisional Management Teams to ensure that our site activities are safe and cause minimum disruption to the communities within which we operate.

2. Temporary access from Roundstone Lane, Angmering.

A temporary construction access will be via the existing Rugby Club entrance off Roundstone Lane. All ecology works within the affected area will be managed and the appropriate protection fencing erected prior to commencement of the works. BDW will ensure that adequate road signage will be in place in Roundstone Lane to warn oncoming traffic of the works.

Once a S278 agreement has been prepared and agreed with Hampshire County Council the works to form a dropped kerb and the formation of hardstanding to provide an access into the site junction will be formally established and inspected in the normal manner. Once the works are completed the junction will be put on to a 12month maintenance programme and then adopted by WSCC subject to inspection.

Refer to CEP drawing 22067-204 temporary access plan for positioning, tracking details and sightlines.

3. Parking for site and Visitors

The Site Operatives and other visitors will be directed to the site wide operative's car park to park their vehicles. This car park is located on the hard standing by the compound as shown on the plan in Appendix A

Note:

Temporary compound to be created as shown on the Construction Management Plan whilst Main compound and Sales/Show arena is set up.

4. Loading and Unloading

All Contractors will be issued instruction to ensure that the route for construction vehicle access to the site is via Roundstone Lane.

Materials will be delivered between working hours of 08.00-18.00 Monday to Friday Please refer to drawing showing place of compound.

5. Storage of Materials

Materials will be stored close to the compound area for ease. This will be placed in the last phase of the building works to avoid problems and access for lorries deliveries etc and also mainly for the occupants of the earlier plots for ease of access to their plot.

Note:

Temporary compound to be created as shown on the Construction Management Plan whilst Main compound and Sales/Show arena is set up.

6. Security and Displays

The site will be secured with fencing (Herras or similar security) with information display boards close to the site entrance. This will be visible from the road side so that passing traffic is aware of the development.

Boards / hoarding adjacent to site entrance to be set back at least 3m in order to protect the visibility splays of emerging vehicles and not impede the ability of vehicles to pull clear of the highway if required to enter the site.

7. Wheel Washing

To keep wheels clean on vehicles that are exiting the site, we will have a jet wash at the entrance to site. This will help keep levels of dirt onto Roundstone Lane to an absolute minimum. Also referring to point 8 below, this will also keep roads in site damp too and keep dust effects to a minimum.

The provision of a road sweeper is to be made available to ensure any mud / debris is cleared from the roads should the wheel wash facility not provide full cleaning of vehicles leaving the site.

8. Controlling emissions of dust, fumes and dirt

Particular care would be required to maintain dust emissions at a practicable minimum when working in the vicinity of residential properties and environmentally sensitive areas. Best practice mitigation would be required during dry conditions. Dust reduction measures would include:

- careful management of earth stockpiles
- sheeting of vehicles transporting materials to and from the site
- limiting the speed of general vehicles within the site to 20mph
- surfacing of the haul roads as soon as possible in the programme
- haul roads to be regularly cleansed
- provision of wheel washing facilities at access points into local roads (to prevent mud from getting on the public highways)
- visual monitoring would be carried out at sensitive locations on a daily basis

By using effective dust mitigation techniques, including good site planning, the potential for dust emissions to arise at a construction site and impact surrounding receptors can be minimised.

The potential for dust to arise during the ground breaking, earth moving and excavation stage of the construction is highly weather dependent. If carried out in dry weather, increased water spraying may be required to ensure the surface material remains damp. In wet weather greater attention would be paid to vehicle cleaning to ensure significant quantities of mud are not trafficked onto local roads, which once dry can become a significant source of dust.

Throughout the construction period, care would be taken to ensure the adequate control of dust from vehicles delivering and removing materials to and from the site. Drop heights, when loading and unloading materials, would be minimised. All dusty loads would be sheeted appropriately. Dried mud and dust carried onto roads by lorries and other machinery can be a significant source of dust. The Site Manager would ensure that the hard surfacing of heavily used areas and adjacent public roadways are regularly cleaned.

Once the actual building of the development commences there is less potential for significant emissions of dust from the site, although emissions may still arise from the storage of dusty materials. Generally storage compounds would be screened, both for security and to prevent wind whipping. In addition, there are certain construction activities that are inherently dusty and would require additional controls e.g. stone or brick cutting. Such activities may require local screening or the activities may be limited to certain areas or time periods in order to limit impacts.

Specific measures to prevent dust would include the following practices:

- the provision of easily cleaned hard standings for vehicles (to include the areas close to the site access)
- the regular cleaning by brushing and water spraying of heavily used hard surfaced area
- the provision of wheel washing facilities or high pressure hose to ensure all vehicles leaving the site are in a satisfactory state of cleanliness
- dusty materials stockpiles and dusty activities such as stone cutting and grinding to be sited away from the site boundary and/or effectively screened where practicable

9. A Scheme for Recycling/disposing of waste

A site waste management plan will be put in place at the start of the site (prior to construction commencing) this will indicate in more detail the process and placing of disposal units. We will have a site segregation unit immediately adjacent to the compound area.

10. Hours of work on site

Hours of work on site will be:

Monday- Friday 08.00-18.00

Saturday- 08.00-13.00

Sunday- Minor works ie... Painting/Decorating/Electrical works etc...between the hours of 08.00-18.00 however no deliveries or heavy machinery to be operated on site.

11. Condition Survey of Existing Highway

Prior to commencing construction works a photographic record survey of the existing highway shall be taken at the highway access points off Roundstone Lane.


12. Construction Traffic

The main construction traffic routing for the site will direct traffic from the A280 and A259 onto the Roundstone By Pass and then Roundstone Lane. The following plan illustrates the route.

13. Public Engagement

The site manager will be running a Meet the Builder evening prior to commencement on the site and residents will be offered an open invitation to attend. The evening will provide the residents with an opportunity to clarify any concerns they have regarding the proposals.

The details of the rest of the team who will provide assistance are as follows:

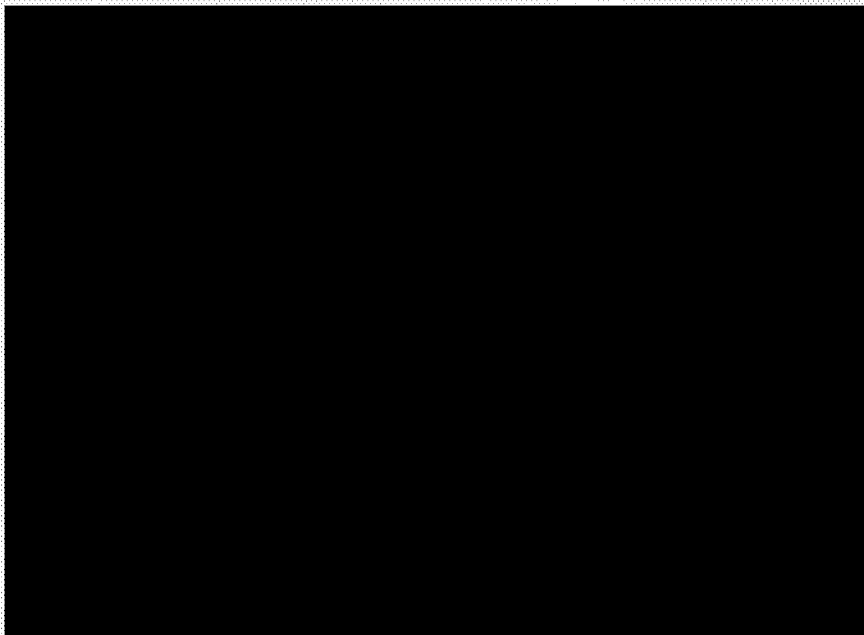

14. Number, type and frequency of vehicles to be used during the construction.

The number and frequency of vehicles on the site will fluctuate during the year and will be influenced by build programme and date specific requirements. The figures shown below are based on an assumed worst case scenario situation:

- Cars, Vans and other lightweight vehicles = 40 per day
- Forklift trucks = 2 per day
- Dumper Truck = 1 per day
- Site deliveries from large vehicles = 5 a day
- Site operated crane – 5 days per calendar month.

Provision will be made to ensure any overall spill of vehicles will be retained within the confines of the application site at all times.

First issue: June 2014.....

Appendix A

Construction Management Plan

