

Josh Street

From: Kennett, Darren [REDACTED]
Sent: 11 September 2014 14:43
To: Peter Cleveland
Subject: FW: Ref: A/82/12/ Land to East Roundstone lane Angmering - Condition 21
Attachments: SUDS Management Plan - Swanbourne Park, Angmering.doc; Maintenance Schedule for Private Drainage.docx

Dear Peter,

Condition 21 – Maintenance and Management of SUDS system

Please find enclosed the proposed SUDS management plan and CEP's Maintenance schedule for private drainage.

Regards

Darren

The sender of this e-mail is a member of the Barratt Developments group of companies, the ultimate parent of which is Barratt Developments PLC (company number 00604574).

Barratt Developments PLC is registered in England and Wales with its registered office at Barratt House, Cartwright Way, Forest Business Park, Bardon Hill, Coalville, Leicestershire, LE67 1UF, together with its principal subsidiaries BDW Trading Limited (03018173), David Wilson Homes Limited (00830271) and Wilson Bowden Developments Limited (00948402). BDW North Scotland Limited (SC027535), also a principal subsidiary, is registered in Scotland and has its registered office at Blairton House Old Aberdeen Road, Balmedie, Aberdeenshire, AB23 8SH.

This e-mail message is intended only for use by the named addressee and may contain privileged and/or confidential information. If you are not the named addressee you should not disseminate, copy or take any action in reliance on it. This communication is subject to contract and not intended to create legal relations between the sender and the recipient. Please view our 'Email Addendum v1' at <http://www.barrattcommercialsupport.co.uk> for further details.

Management of Sustainable Urban Drainage Systems


At

Swanbourne Park, Angmering

For

David Wilson Homes, Southampton

DAVID
WILSON
HOMES



Little details. **Big difference.®**

31st March 2014
Revision 2.0

Introduction

This document sets out how the management company will own and implement the long-term management responsibilities for the SUDS drainage arrangements at the Swanbourne Park development in Angmering.

The terms of the Section 106 agreement between the developer and the Local Authority (to run with the transfer of the open space land and the SUDS pond areas to the management company) bind the developer to ensuring that robust arrangements are secured from the outset to safeguard the adequate future maintenance and long term management of the SUDS system.

The appointed management company will set up a new limited company on behalf of the owners of the new properties, the purpose of which is to provide such financial and practical measures as are necessary to secure the future repair and maintenance works of the SUDS.

Management Plan for Sustainable Urban Drainage Systems


The costs to manage the SUDS will be funded through a financially sustainable income stream secured against all of the properties on the development. Each property will contribute an annual Estate Service Charge.

The development incorporates the principals of sustainable development and in that regard SUDS has been deployed as the key approach to the surface water drainage strategy.

There are 3 main components to the surface water SUDS strategy:

- Drainage of the main estate roads/highway through the use of kerb drainage system connected into an attenuation balancing pond via a natural reed bed treatment system.
- Drainage of the shared and individual private driveways through block porous paving to plot specific drives which drains directly through to a stone sub-base and infiltrates the ground below
- Drainage of domestic roof water run-off through the use of conventional trench type soakaways with aquacell or similar crates combined with catch-pit manholes for silt management.
- Oversize attenuation pipe at site entrance to prevent surface water drainage into run off of existing ditch at front of site.

The following extract, taken from the drainage design drawings illustrates the key components:

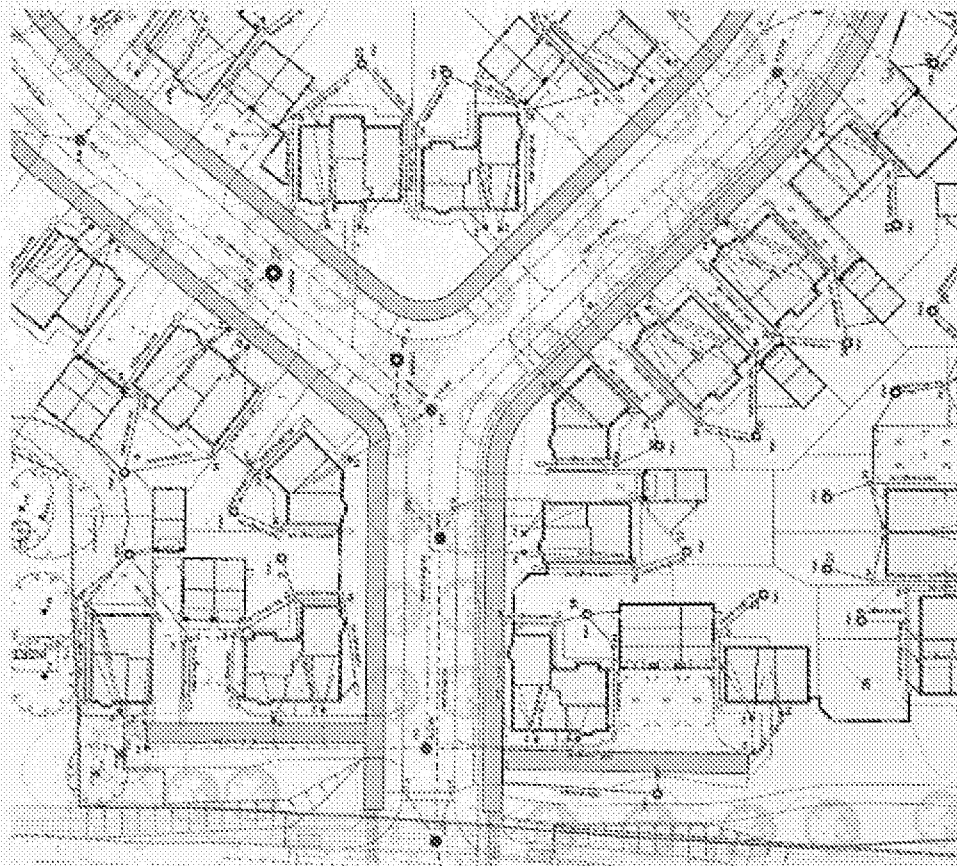

The design specification for the private roads and driveways includes for a mix of areas of porous block paving and areas of tarmac. All of the estate roads on the site will be designed to an adoptable standard and will be offered up to the local authority for adoption.

Regular sweeping of porous areas will help remove general detritus. A light power-hose of porous block paving systems can be used to keep voids clear, however designs tend to assume that some silting and reduction in capability will take place over time. The design allows for some deterioration in system performance. A light power hose at medium pressure will help unclog blocked pores will help maintain system performance.

The required frequency of jet-washing will be determined by local conditions and the managing agent will determine the appropriate frequency when the development is fully operational and functioning. It has been shown that regular jetting can unclog around 80% of the original voids within the porous systems.

The managing agent is required to adhere to recommendations in 'Guide to the design, construction and maintenance of concrete block permeable pavements' by Interpave see: www.paving.org.uk.

A Useful Guide to Permeable Surfacing of front gardens has been published by government and contains some useful tips as follows:

Looking after a permeable driveway

Permeable paving, soakaways and rain gardens can provide durable and long lasting drainage systems. They are different to normal driveways and observing a few do's and don'ts will get the best out of them.

Do	Don't
• clean up leaves, mud and litter before they have a chance to clog the surface • brush the surface if any dirt collects on it and this will reduce the risk of it blocking and help stop weeds growing • remove weeds by hand or with a weed burner	• put soil, sand or similar material on the driveway that will block the surface and stop water soaking in • mix concrete on the driveway • pour liquids such as oil on the surface • allow the garden areas to drain onto permeable surfaces as this can allow soil to wash into the surface and block it • use weed killer

If the surface of any of the systems blocks then it can be cleaned. For porous asphalt and porous/permeable concrete blocks the surface can be unclogged using a small vacuum road sweeper or a jet washer.

Individual private granular fill soakaways are in use as part of the SUDS system using the conventional SUDS approach. The soakaways are combined with catch pit type manholes which the individual homeowners can maintain directly.

The soakaways have been designed with access/rodding/jetting chambers formed as catch-pit manholes. Where these serve a 'communal purpose' and are situated in areas beneath common areas or areas subject to reciprocal rights of way, The managing agent will provide for jetting/cleansing on a 5-year cycle.

MAINTENANCE RECORDS

The managing agent is required to include an offer to the homeowners for an annual inspection regime of all private catch pit chambers which will help safeguard against potential lack of maintenance to the rear garden soakaways.

Ultimately, as with all components of a private dwelling it will be the homeowners responsibility to determine how they maintain their individual private soakaway (serving their own property) however the managing agent will include for the issuing of annual reminders of the need to inspect and clean catch pits. Where appointed to undertake maintenance for individual soakaways, The managing agent will maintain a record of the maintenance.

In addition to any records to be maintained on behalf of individual property owners, a record of SUDS Maintenance will be held for each shared soakaway as follows:

[illegible]

Where maintenance is undertaken on the drives or the ponds, the managing agent will record this and maintain an annual register of maintenance for the common parts of the SUDS system.

Foul Drainage Management Arrangements

The intention is to ensure that the foul sewers at this development become the responsibility of Southern water according to the terms of a Section 104 adoption agreement to be entered into.

Engineer's Inspections:

During construction the SUDS will be routinely inspected by the Design Engineer (CEP Engineering) on a monthly basis initially to observe construction activity and the findings are to be reported direct to David Wilson Homes.

David Wilson Homes will provide a copy of these records and any observations made to the managing agent at the point of handover. This regime will supplement the 'Record of Construction' process for additional comfort.

Short Term Establishment and Handover

The transfer of management responsibility to the managing agent may be staged during construction subject to certain contractual obligations being in place which includes the SUDS to be constructed and signed off using the process outlined above.

Handover of all design information relating to the entire SUDS network will be made in accordance with the Handover Checklist provided at (Appendix A).

A Risk Assessment will be undertaken on completion and the management arrangements will take account of any significant or unusual residual risks and hazards identified (if not previously identified during the design stage). If required, this will include prior liaison with the emergency services to provide details of site location, access routes and maximum depth of water.

Management Objectives

Short Term

The primary objectives are to ensure satisfactory establishment and stabilisation of the system including the adjoining landscaped areas and to ensure public safety is maintained.

Medium to Long Term

The transfer of management responsibilities are as follows:-

1. Public safety.
2. To maintain an efficient drainage system, in consultation with West Sussex District Council and/or Southern Water and/or the Environment Agency if appropriate.
3. To maintain regular liaison with the residents and explain the role of the SUDS to the development and the wider community and the role they can play in maintaining clean discharges into and out of the system.
4. To manage and develop the visual amenity of the attenuation wetland habitat by maintaining the soft landscaping in accordance with the approved Open Space

Landscape Management and Maintenance Plan and the 'Biodiversity Mitigation and Management Plan' this includes:

- a) Grass cutting both amenity and filter grass.
 - b) Litter collection and disposal.
 - c) Shrub maintenance.
 - d) Periodic inspection and management of trees including coppicing where applicable.
 - e) Inspection and repair of perimeter fences, gates, paths and other features.
 - f) Regular inspection of all features associated with the function of the SUDS.
 - g) Recording the inspections and maintenance in an 'Annual SUDS Maintenance Record'
5. To encourage the development of ecological interest, in so far as this can be achieved subject to the incoming water quality (taking account of highway salt and other materials that may be discharged by the public).

Public Safety

It is well understood that bodies of water, whilst they can represent very attractive features which have ecological value and play an essential role in flood attenuation, represent a potential safety hazard, particularly to small children.

Whilst vegetation around the ponds is of benefit both ecologically, and visually, such planting will also be carried out and subsequently managed as part of the safety mechanisms for open water.

There will be occasions in the life of the system when children may enter areas of open water. To mitigate the potential hazard SUDS are designed with shallow side slopes so that it is possible to escape from the ponds by crawling up the banks. RoSPA recommends that slopes should be sufficiently shallow that any person wading into the water can proceed for at least twice their own height and remain standing with their head well above water. RoSPA also recommends the use of even grades and the avoidance of sudden shelving areas of deep water.

SUDS information leaflets will be distributed to the local residents as a part of the initial liaison. The Managing Agent contact phone number is printed on these leaflets in order to provide an easy point of contact. This allows direct access to the Managing Agents 24 hours emergency help.

Water Quality

The Managing Agent will be responsible for the removal of material deposited within the system as part of the periodic litter inspection. Any contamination entering the system will be reported to the appropriate body and action taken to contain the spillage until it can be safely removed.

In the event of severe pollution the managing agent will liaise with the Environment Agency and West Sussex District Council in prosecuting the polluter.

Ecology

As the wetland area becomes established it will start to develop ecological importance and support amphibians and invertebrates. To facilitate the colonisation, the public will be discouraged from introducing fish into the ponds.

The Managing Agent will ensure that the wetland is inspected by an Ecologist on a 5 yearly basis to advise on the condition of the habitat and review in accordance with the habitat Creation and Management Strategy.

Periodic Review

The system will be subject to a 5 yearly review to establish if the current management regime is meeting the management objectives. This may require liaison with West Sussex District Council, Southern Water, the Environment Agency and the Highways Authority. Any significant changes to the Management Arrangements will be first referred to the Planning Authority for approval.

SUDS Handover Checklist

Appendix A sets out the level of information to be provided to the Managing Agent by David Wilson Homes prior to the transfer of management responsibilities.

The criteria reflect the information required for the design and operation of SUDS in order to satisfy water quantity, water quality and amenity requirements.

The level and extent of information accords with latest UK SUDS guidance from design through to implementation, handover and aftercare.

Published guidance used for the checklist includes:

- Drainage Assessment: A Guide for Scotland, SUDSWP (2005),
- The SUDS Manual, CIRIA (2007),
- Site handbook for the construction of SUDS, CIRIA (2007),
- Sustainable Urban Drainage Systems. Design Manual for Scotland and Northern Ireland, CIRIA (2000), and
- Construction (Design and Management) Regulations, HSE.

Appendix A - SUDS Handover Checklist

The following information must be supplied prior to the adoption of Sustainable Urban Drainage Systems to the Remus

1 A Drainage Assessment for the Development, as detailed by the Sustainable Urban Drainage Scottish Working Party (SUDSWP, 2005) including:

- | | |
|-----|---|
| 1.1 | Method statement detailing how surface water arising during construction will be dealt with and if temporary or sacrificial SUDS will be established for dealing with construction run-off. |
| 1.2 | An overview of the historical and current drainage patterns including water courses, ditches, culverts, sewers and general land drainage, both within and adjoining the site and confirmation that the SUDS design includes surface water, or groundwater entering the development from any adjacent land. |
| 1.3 | A design of the SUDS to be incorporated with final discharge point(s) where relevant, including how the drainage design satisfies SUDS techniques , both in terms of treatment of water quality and attenuation of water quantity, in accordance with best practice and design. |
| 1.4 | A proposed drainage plan identifying the type(s) of SUDS to be incorporated and SUDS land take . Adequate land area must be designated for SUDS facilities, which must also allow for access and maintenance. |
| 1.5 | Calculations showing the drain down time of the SUDS. |
| 1.6 | Indication of overland flow routes and safeguarding of properties from flooding. |
| 1.7 | Confirmation of land ownership of all land required for drainage , including SUDS measures and details of which body will be responsible for vesting and maintaining individual aspects of the surface water drainage. |
| 1.8 | Appropriate design calculations are required for the entire surface water drainage system including those where SUDS form part of a drainage network including piped surface water systems, irrespective of ownership or maintenance responsibility. |

1.B Additional requirements.

- | | |
|-----|--|
| 1.9 | A description of safety measures to render SUDS acceptably safe including signage and ice strategy assessment (see point 3.3 below). |
|-----|--|

2. Design Information

- | | |
|-----|--|
| 2.1 | Site survey (based upon a topographical survey carried out on completion of the works) and as built drawings including drainage layout plans (as approved by the L.A. / Environmental Regulator), SUDS component details (pre-treatment, inlet/outlet, headwall, check dam details etc) and planting specification.
This information should include: <ul style="list-style-type: none"> • Clearly defined boundaries of the land to be maintained. • Levels and contours of land, trees, soft and hard areas. • Location of all features i.e. manholes, banking, SUDS, inlet/outlet structures, fences, paths, roads etc. • Spot levels at significant locations in addition to the contours. |
| 2.2 | Specification of materials. |
| 2.3 | Summary of hydraulic analysis including: <ul style="list-style-type: none"> • Maximum and minimum water levels. • Peak flows to critical areas of the system. • Flow control features. |

3. Construction Details

- | | |
|-----|--|
| 3.1 | Contractors' method statements for construction of the SUDS. |
| 3.2 | Record of Construction detailing: <ul style="list-style-type: none"> • Inspections of the SUDS system during construction by MJA • Details of the construction and any 'as-built' alterations undertaken |
| 3.3 | Health and safety file information (as specified by the Construction [Design and Management] Regulations 1994) relevant to the surface water system to be adopted. |

References

1. Sustainable Urban Drainage Scottish Working Party (2005). *Drainage Assessment. A guide for Scotland*. [online]. Available from: www.sepa.org.uk
2. Construction Industry Research and Information Association (2000). *Sustainable Urban Drainage Systems. Design Manual for Scotland and Northern Ireland*. CIRIA Report C521. London: CIRIA.
3. Construction Industry Research and Information Association (2007). *Site handbook for the construction of SUDS*. CIRIA Report C698. London: CIRIA
4. Construction Industry Research and Information Association (2007). *The SUDS Manual*. CIRIA Report C697. London: CIRIA
5. Scottish Water. *Sewers for Scotland. Draft SUDS Document*. [online]. Available from: http://www.scottishwater.co.uk/portal/page?_pageid=627,4259793&_dad=portal&_schema=PORTAL
6. Health and Safety Executive (2004). *Construction (Design and Management) Regulations 1994: The Health and Safety File*. Construction Information Sheet No 44. [online]. Available from: <http://www.hse.gov.uk/pubns/conindex.htm>

1 Maintenance of Private Drainage Systems

1.1 Pipe Networks

- 1.1.1 All private drain runs should be jetted clear every two years with a visual inspection of each manhole. A full CCTV survey should be carried out every ten years to ensure the structural integrity of the system.

1.2 Gully Pots and Catch pits

- 1.2.1 All gully pots and any catch pits should be vacuum cleaned twice annually once in the spring and again after leaf fall in autumn.

1.3 Channel Drains

- 1.3.1 All channel drains should be cleaned of leaves after leaf fall in autumn and the sumps cleaned.
- 1.3.2 Channel drains should be jetted every five years.

1.4 Soakaways

- 1.4.1 Ring Soakaways should be visually inspected annually to check for silting or contamination. Any build-up of silt at the base of the soakaway should be removed during dry conditions when the soakaway is empty or vacuum cleaned at other times.
- 1.4.2 The upstream manholes leading to Trench Soakaways should be visually inspected annually to check for indications of silting of the soakaway.

1.5 Ponds and Open Watercourses

- 1.5.1 Maintenance of ponds and open watercourses should be undertaken in April and November. A visual inspection should be undertaken to ensure vermin guards are intact and unobstructed and weed cutting should be undertaken as required to ensure that flow is not obstructed or storage capacity reduced by excess vegetation growth