




BAFFLE GREASE FILTERS

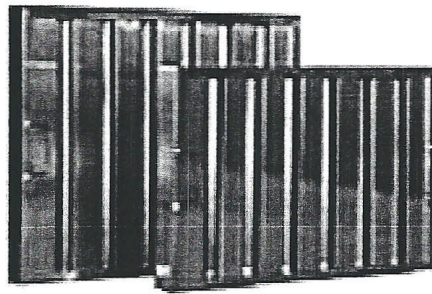

Application

These filters are designed for use in commercial kitchens and food preparation areas where their primary function is to prevent grease from travelling from the cooking area up into the extract duct, as well as providing a flame barrier.

Fabrication

These filters are made from rolled channel frame, with safety edges. Each blade overlaps the opposite one to provide an aerodynamic twin wall baffle which removes grease from the air. The grease drains down the blades and through the drain holes provided into a collection tray provided in the kitchen canopy.

No.	Nominal Size Inches	Height (mm)	Width (mm)	Depth (mm)	Rated Airflow m ³ /hr.
GFBx-1020	10 x 20 x 2	241	495	45	644
GFBx-1212	12 x 12 x 2	292	292	45	460
GFBx-1216	12 x 16 x 2	292	394	45	621
GFBx-1224	12 x 24 x 2	292	594	45	937
GFBx-1616	16 x 16 x 2	394	394	45	838
GFBx-1620	16 x 20 x 2	394	495	45	1053
GFBx-1625	16 x 25 x 2	394	622	45	1323
GFBx-1818	18 x 18 x 2	445	445	45	1069
GFBx-2010	20 x 10 x 2	495	241	45	644
GFBx-2016	20 x 16 x 2	495	394	45	1053
GFBx-2020	20 x 20 x 2	495	495	45	1323
GFBx-2025	20 x 25 x 2	495	622	45	1663
GFBx-2424	24 x 24 x 2	597	597	45	1925

