


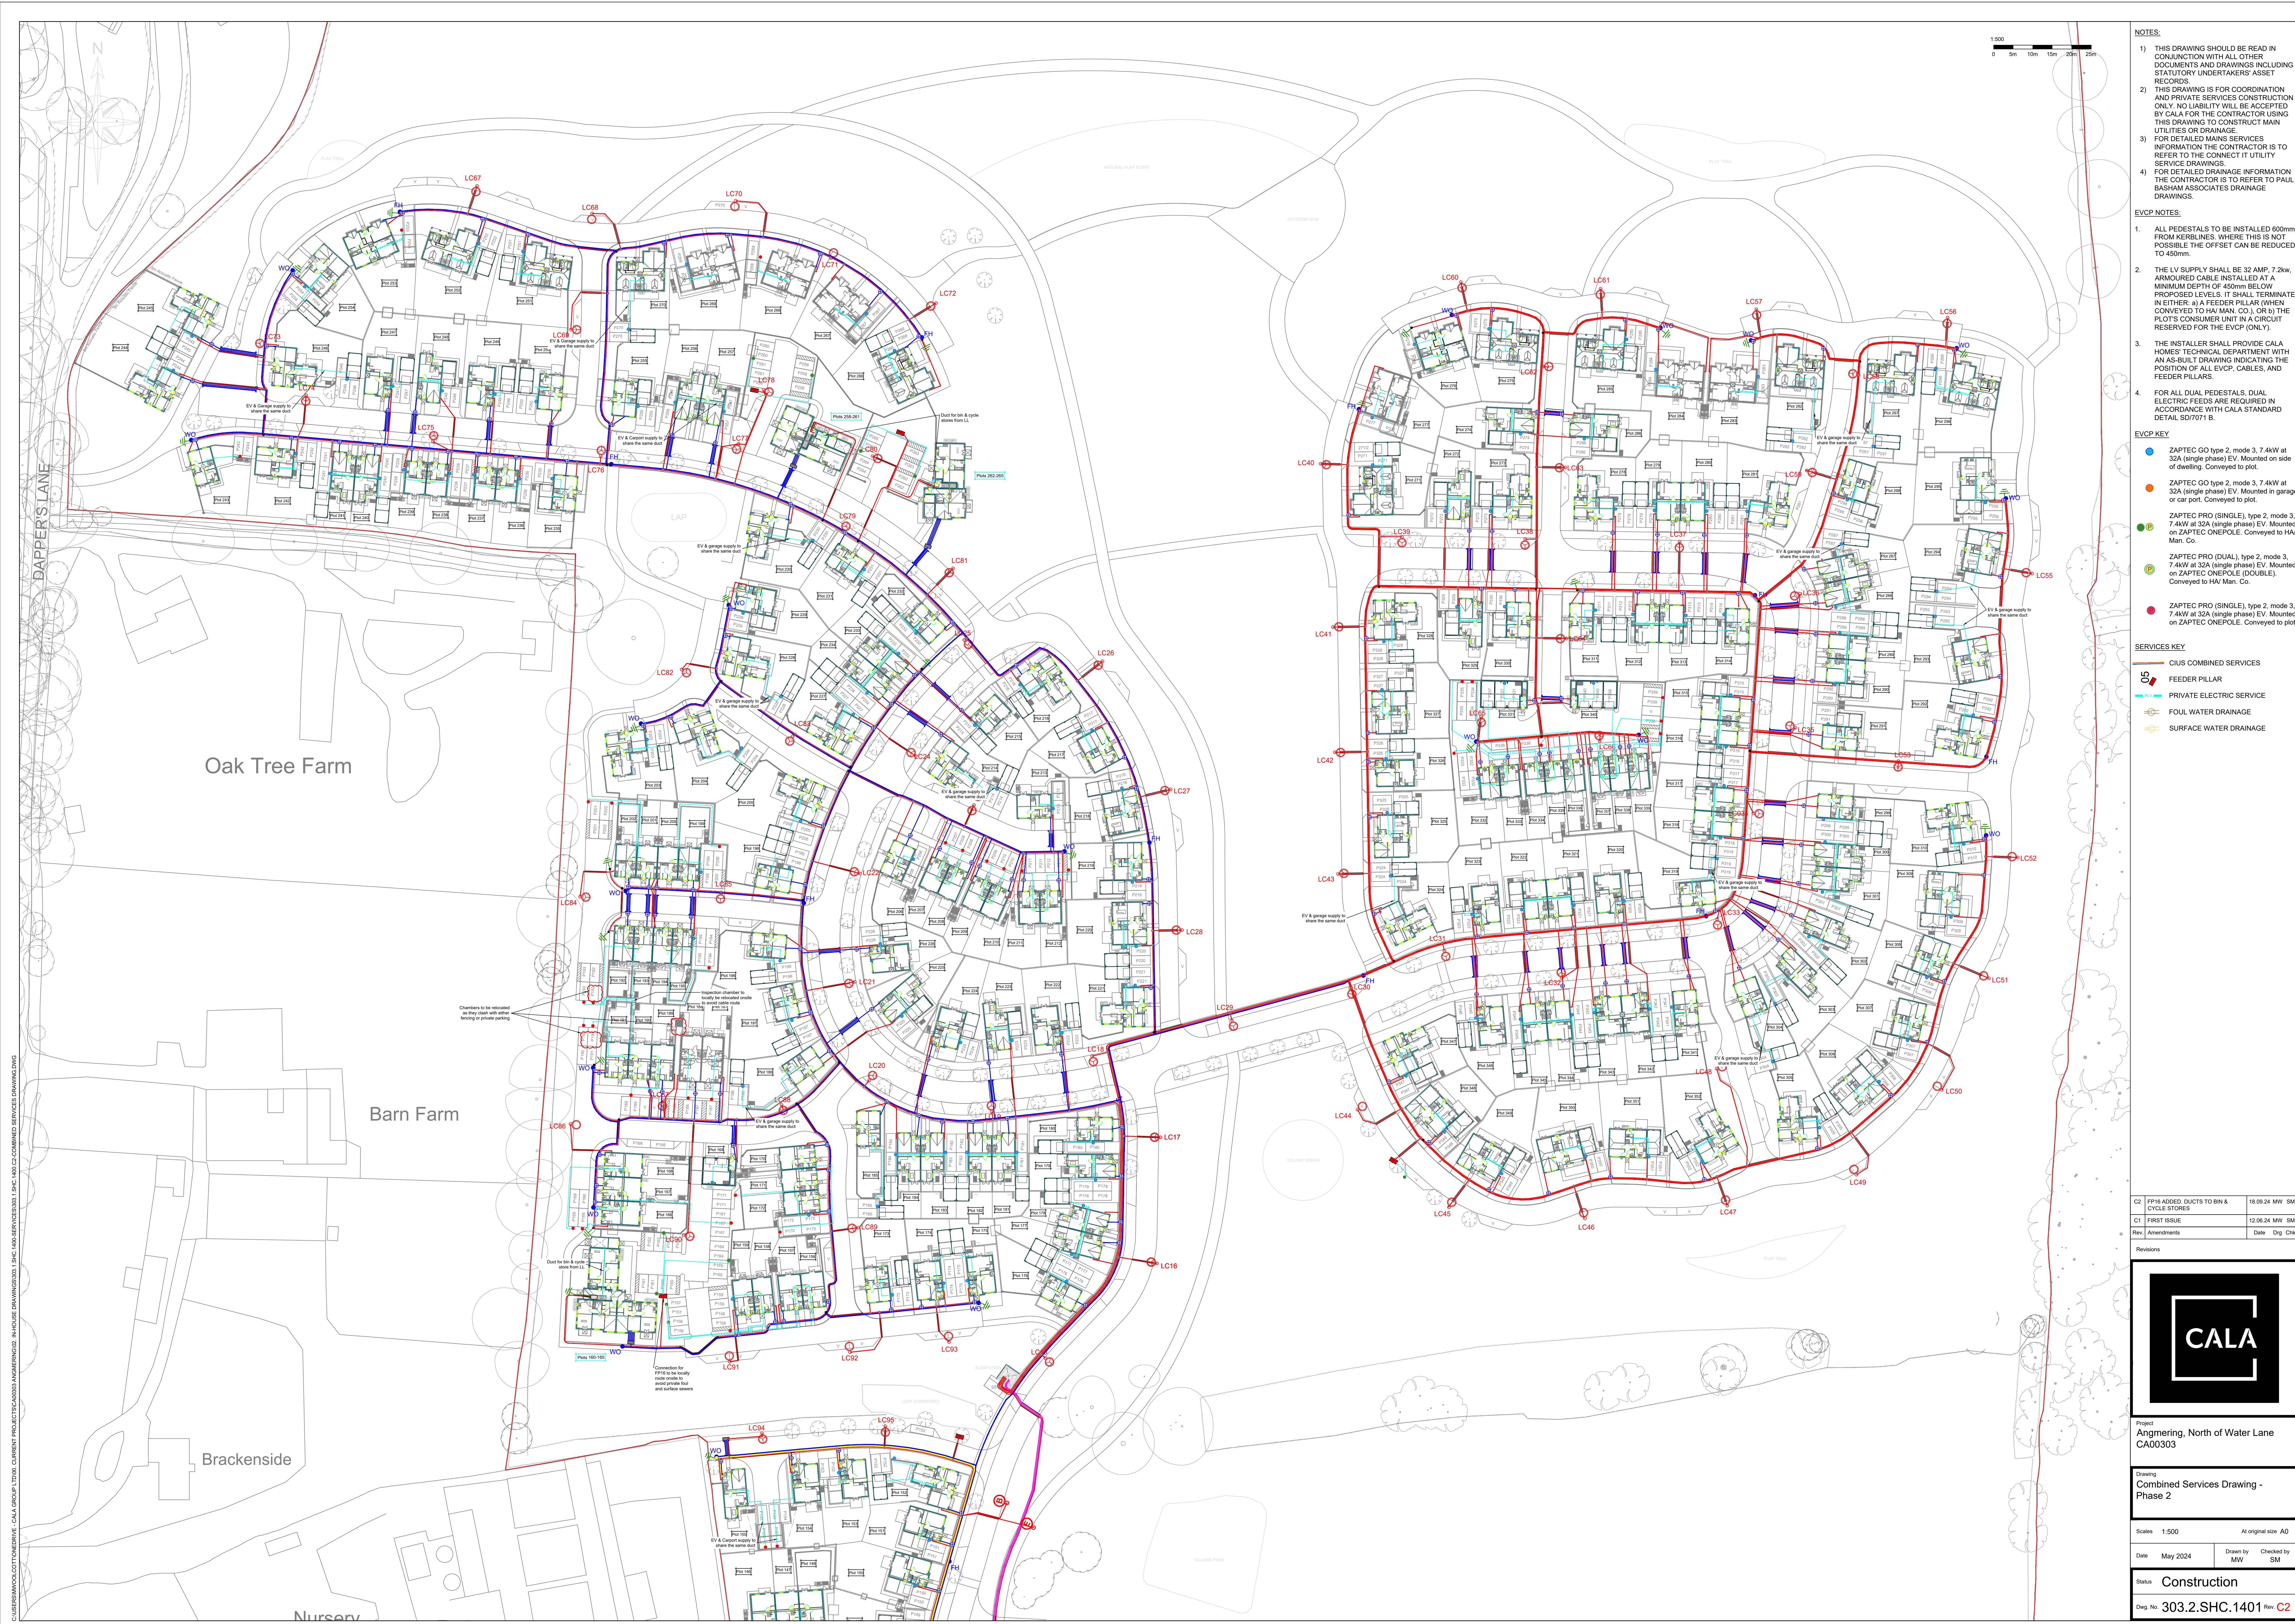

- NOTES:**
- 1) THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH ALL OTHER DOCUMENTS AND DRAWINGS INCLUDING STATUTORY UNDERTAKERS' ASSET RECORDS.
 - 2) THIS DRAWING IS FOR COORDINATION ONLY. NO LIABILITY WILL BE ACCEPTED BY CALA FOR THE CONTRACTOR USING THIS DRAWING TO CONSTRUCT MAIN UTILITIES OR DRAINAGE.
 - 3) FOR DETAILED MAINS SERVICES INFORMATION THE CONTRACTOR IS TO REFER TO THE CONNECT IT UTILITY SERVICE DRAWINGS.
 - 4) FOR DETAILED DRAINAGE INFORMATION THE CONTRACTOR IS TO REFER TO PAUL BASHAM ASSOCIATES DRAINAGE DRAWINGS.

- EVCP NOTES:**
1. ALL PEDESTALS TO BE INSTALLED 600mm FROM KERBLINES. WHERE THIS IS NOT POSSIBLE THE OFFSET CAN BE REDUCED TO 450mm.
 2. THE LV SUPPLY SHALL BE 32 AMP, 7.2kw, ARMoured CABLE INSTALLED AT A MINIMUM DEPTH OF 450mm BELOW PROPOSED LEVELS. IT SHALL TERMINATE IN EITHER: a) A FEEDER PILLAR (WHEN CONVEYED TO HA/MAK CO.), OR b) THE PLOTS CONSUMER UNIT IN A CIRCUIT RESERVED FOR THE EVCP (ONLY).
 3. THE INSTALLER SHALL PROVIDE CALA HOMES' TECHNICAL DEPARTMENT WITH AN AS-BUILT DRAWING INDICATING THE POSITION OF ALL EVCP, CABLES, AND FEEDER PILLARS.
 4. FOR ALL DUAL PEDESTALS, DUAL ELECTRIC FEEDS ARE REQUIRED IN ACCORDANCE WITH CALA STANDARD DETAIL SD/0701 B.

- EVCP KEY:**
- ZAPTEC GO type 2, mode 3, 7.4kW at 32A (single phase) EV. Mounted on side of dwelling. Conveyed to plot.
 - ZAPTEC GO type 2, mode 3, 7.4kW at 32A (single phase) EV. Mounted in garage or car port. Conveyed to plot.
 - ZAPTEC PRO (SINGLE), type 2, mode 3, 7.4kW at 32A (single phase) EV. Mounted on ZAPTEC ONEPOLE. Conveyed to HA/MAK Co.
 - ZAPTEC PRO (DUAL), type 2, mode 3, 7.4kW at 32A (single phase) EV. Mounted on ZAPTEC ONEPOLE (DOUBLE). Conveyed to HA/MAK Co.
 - ZAPTEC PRO (SINGLE), type 2, mode 3, 7.4kW at 32A (single phase) EV. Mounted on ZAPTEC ONEPOLE. Conveyed to plot.

- SERVICES KEY:**
- CIUS COMBINED SERVICES
 - FEEDER PILLAR
 - PRIVATE ELECTRIC SERVICE
 - FOUL WATER DRAINAGE
 - SURFACE WATER DRAINAGE

C2	FP16 ADDED, DUCTS TO BIN & CYCLE STORES	18.09.24	MW	SM
C1	FIRST ISSUE	12.06.24	MW	SM
Rev.	Amendments	Date	Dtg	CHK

Revisions



Project
Angmering, North of Water Lane
CA00303

Drawing
Combined Services Drawing -
Phase 2

Scales: 1:500 At original size A0

Date	May 2024	Drawn by	MW	Checked by	SM
------	----------	----------	----	------------	----

Status: Construction

Dwg. No: 303.2.SHC.1401 Rev: C2