

Technical Specification


Control Point	Head (m)	Flow (l/s)
Primary Design	1.920	7.200
Flush-Flo™	0.489	6.656
Kick-Flo®	0.997	5.299
Mean Flow		6.014

Hydro-Brake® Optimum Flow Control including:

- 3 mm grade 304L stainless steel
- Integral stainless steel pivoting by-pass door allowing clear line of sight through to outlet, c/w stainless steel operating rope
- Beed blasted finish to maximise corrosion resistance
- Stainless steel fixings
- Rubber gasket to seal outlet



hydro-int.com/patents

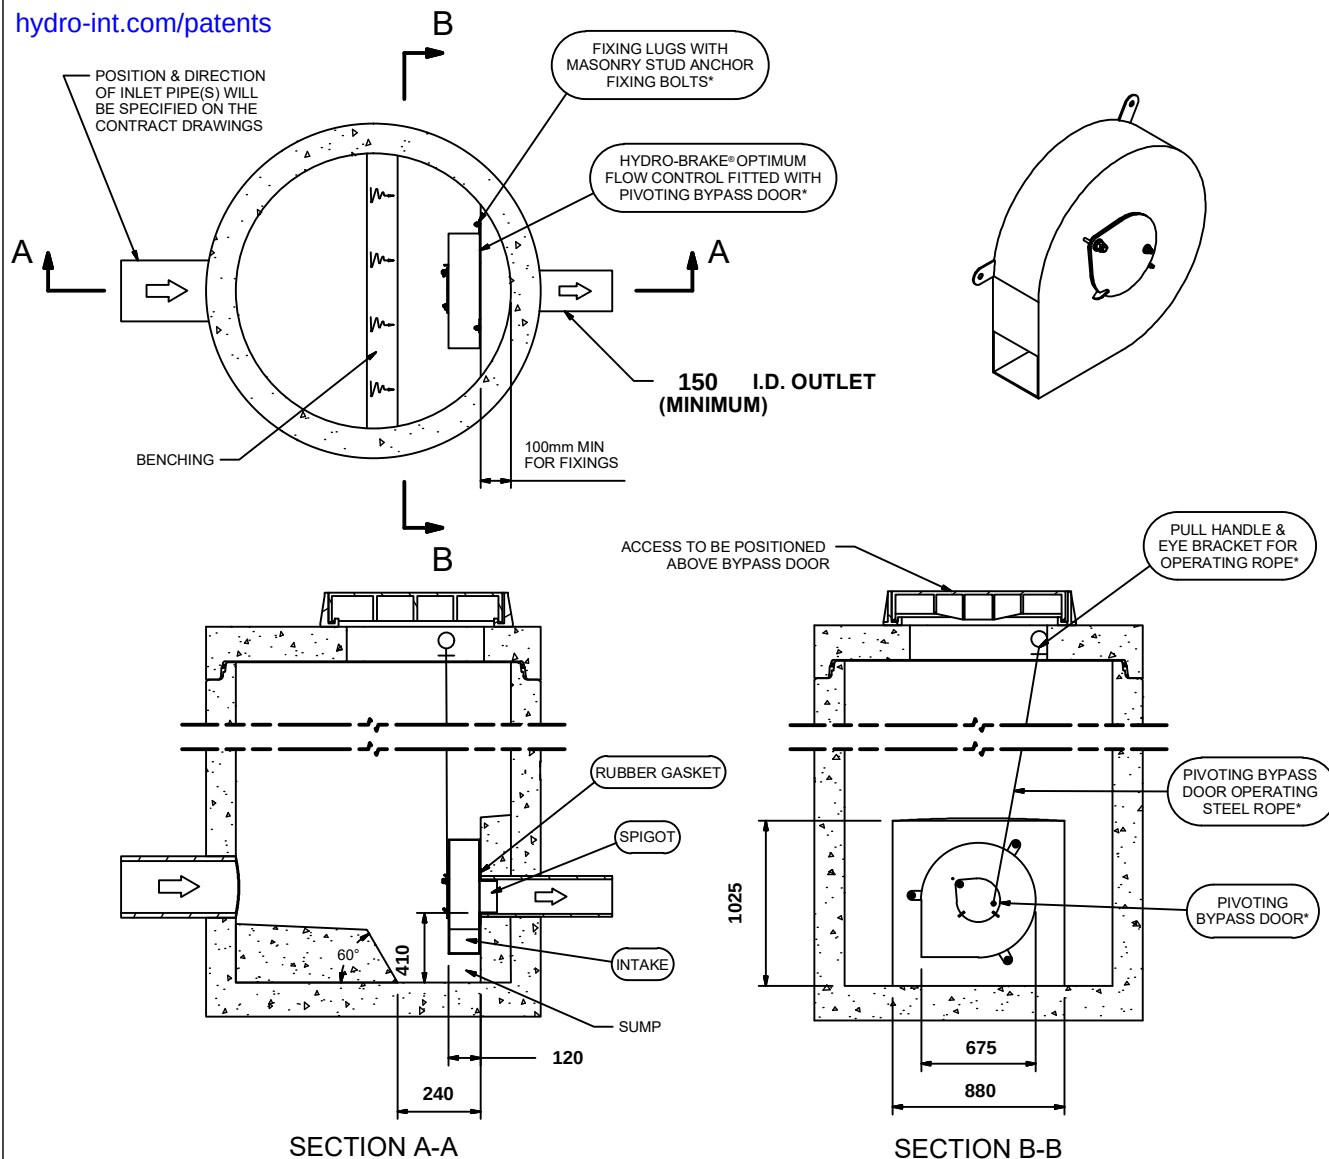

IMPORTANT:

○ LIMIT OF HYDRO INTERNATIONAL SUPPLY

THE DEVICE WILL BE HANDED TO SUIT SITE CONDITIONS
FOR SITE SPECIFIC DETAILS AND MINIMUM CHAMBER SIZE REFER TO HYDRO INTERNATIONAL
ALL CIVIL AND INSTALLATION WORK BY OTHERS

* WHERE SUPPLIED

HYDRO-BRAKE® FLOW CONTROL & HYDRO-BRAKE® OPTIMUM FLOW CONTROL ARE REGISTERED TRADEMARKS FOR FLOW
CONTROLS DESIGNED AND MANUFACTURED EXCLUSIVELY BY HYDRO INTERNATIONAL

THIS DESIGN LAYOUT IS FOR ILLUSTRATIVE PURPOSES ONLY. NOT TO SCALE.

DESIGN ADVICE



The head/flow characteristics of this SHE-0112-7200-1920-7200 Hydro-Brake® Optimum Flow Control are unique. Dynamic hydraulic modelling evaluates the full head/flow characteristic.
The use of any other flow control will invalidate any design based on this data and could constitute a flood risk.

Hydro
International®

DATE 10/4/2021 11:22 AM

SITE Dappers Lane

DESIGNER Liam Hannon

REF 20079 - CC28

SHE-0112-7200-1920-7200

Hydro-Brake® Optimum

© 2021 Hydro International Ltd, Shearwater House, Clevedon Hall Estate, Victoria Road, Clevedon, BS21 7RD. Tel: 01275 878371 Fax: 01275 874979 Web: www.hydro-int.com Email: enquiries@hydro-int.com

civils@bannersgate.com