

Polystorm Uplift / Buoyancy Check - Based on Eurocode 7

40609 - Housing Development, Merry England, Dappers Lane, Angmering

Design factor of safety (FoS)

Ultimate Limit State		Uplift (UPL)	
Permanent actions (G)	- Stabilising, $\gamma_{G,stb}$	0.9	[Table A.NA.15, NA to BS EN 1997-1:2004]
	- Destabilising, $\gamma_{G,dst}$	1.1	[Table A.NA.15, NA to BS EN 1997-1:2004]
Variable actions (Q)	- Stabilising, $\gamma_{Q,stb}$	0	[Table A.NA.15, NA to BS EN 1997-1:2004]
	- Destabilising, $\gamma_{Q,dst}$	1.5	[Table A.NA.15, NA to BS EN 1997-1:2004]

Assumed installation parameters

Material density	- granular backfill, γ_{Bk}	20.0 kN/m ³	[Assumed]
	- water, γ_{Wk}	9.81 kN/m ³	[Assumed]
	- saturated backfill, γ'_{Bk} (= $\gamma_{Bk} - \gamma_{Wk}$)	10.2 kN/m ³	
Depths	- GL to structure IL, H	1.553 m	
	- GL to GWL, h_w	1.300 m	

Proposed Polystorm structure

Unit description	Polystorm-R
Product code	PSM1A
Structure depth, h_1	0.800 m
Cover depth, h_c	0.753 m

Actions

Displaced water volume, Vol_{cell}	0.25 m ³ /m ²
--------------------------------------	-------------------------------------

Characteristic destabilising

Water uplift, U_{Gk} (= $\gamma_{Wk} \times Vol_{cell}$)	2.48 kN/m ²
--	------------------------

Characteristic stabilising

Self weight of	- Polystorm structure, W_{Gk1}	0.38 kN/m ²	[Polypipe technical data]
	- Backfill, W_{Gk2} (If $h_w < h_c = \gamma_{Bk} \times h_w$; else = $\gamma_{Bk} \times h_c$)	15.06 kN/m ²	
	- Saturated fill, W'_{Gk2} (= $\gamma'_{Bk} \times [h_c - h_w]$)	N/A	

Effects of Actions

Destabilising design vertical actions, $V_{d,dst}$ (= $\gamma_{G,dst} \times U_{Gk}$)	2.73 kN/m ²	
Stabilising design vertical actions, $V_{d,stb}$ (= $\gamma_{G,stb} \times W_{Gk}$)	13.89 kN/m ²	
Degree of utilization, Λ_{UPL} (= $V_{d,dst} / V_{d,stb}$)	20 %	< 100%; Passes Check

Traditional Verification of Stability Against Uplift

Traditional lumped FoS, F (= W_{Gk} / U_{Gk})	6.2
---	-----

Notes

- 1 Groundwater assumed to act as a permanent destabilising action
- 2 If uncertainty in the level of ground or free water exists, consideration should be given to the application of a safety margin to the assumed characteristic water level
- 3 The above assessment assumes that the Polystorm structure is completely flexible and that there is negligible frictional resistance between the geocellular structure and the native soil. The uplift stability verification has therefore been simplified, based on a m² (plan area) basis.

Please note that the information in this document is of an illustrative nature and is supplied by Polypipe Civils without charge. It does not form part of any contract or intended contract with the user. Final determination of the suitability of any information or material for the use contemplated and the manner of use is the sole responsibility of the user and the user must assume all risk and liability in connection therewith. Refer to www.polypipe.com/disclaimer for further information.

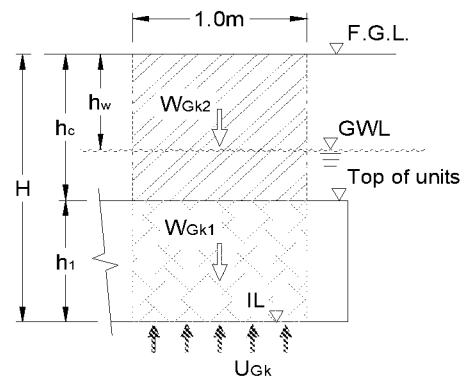


Fig 1) Definitions illustration