SPECIFICATION NOTES - REFER ALSO TO THE MEASURED WORKS SCHEDULE

A) Setting out

1. Planting shall be set out exactly as shown on the drawing, and measured from existing fixed points. Curved beds shall be set out using radii scribed on the ground using two pointed stakes and a line between, or with site marker paint. The junction between convex and concave curves shall be cut to form a smooth and even flowing line. Check that all setting out conforms to the plan before cultivation and planting works are carried out. Failure to do so may result in rejection of the work by the landscape architect and may require amendment at the contractor's expense.

2. All planting beds shall be a minimum of 1 metre wide, except where there is insufficient space, due to the constraints of walls and path edgings and their foundations. With narrow beds between walls/ fences and path edgings, ensure that the bed has space free from concrete footings before planting. If the bed is sealed with concrete, then the landscape contractor shall contact the site manager or landscape architect to determine if footings are excessive and can be reduced or else, the bed can be paved. The width of all beds will be checked by the inspecting landscape architect and where the width is not as drawn, the contractor shall re- cultivate/remake the bed specified width at his own expense.

B) Ground preparation:

1. Pre-planting herbicide application:- Apply by suitable spraying apparatus, an approved translocated systemic herbicide to the manufacturer's instructions and to 1997 Control of Pesticides Regulations and 2003 COSHH regulations on all beds, except those which are both weed free and are to receive agrotextile sheet mulch. Spray immediately if any weeds are present. If none are showing, but there may be a delay before planting, or the area is to be seeded, spray after one month following cultivation, to allow dormant seed to germinate. All spraying shall be carried out by skilled and qualified operatives, using protective clothing, in suitable weather (no wind) and any damage caused by spray drift, from incorrect usage or spillage, shall be rectified at the contractor's own cost. Repeat as necessary to ensure complete kill and rake off all dead material from site.

2. Carry out the following works to the existing topsoil on site to ensure it Conforms to BS 3882:2015, being free from rocks larger than 50m diameter, concrete, all roots, wire, brick, and have less than 20% clay. Allow for pre-application of herbicide as above. Fertilise with 100g per meter square of Hortilase CRF (16-8-12) slow release fertilizer, in accordance with the manufacturer's instructions. For beds less than 5 meters in width, fork over thoroughly or machine rotovate soil to a depth of 400mm, ensuring that the subgrade and topsoil are completely broken up and free draining, relieving any compaction. For beds greater than 5 metres in width, break up the subgrade and topsoil using a tractor mounted subsoiler or ripper at 500mm centres to a depth of 500mm,except where there are services, or within 10 meters of tree stems or 3 meters of existing hedges. Do not rip areas where roots greater than 10mm diameter are encountered.

3. Determine before submitting a tender, the extent of support from the site manager with ground preparation: ensure soil of all planting beds is graded to a level (50mm below adjacent grass or paved surfaces, (80mm below where agro- textile sett mulch is not specified), within 400-600mm of edges to ensure bark or wood chip mulches are retained. Where grass is proposed, then the soil level shall be flush (maximum 15mm below - but never proud) of adjacent paved surfaces, to receive rain water run off. The landscape contractor is responsible for ensuring that the final product conforms to the specification even where the developer and/or main contractor have failed to supply and spread topsoil to the received level. The landscape contractor shall allow for adjustment of levels, as specified above, including for re-grading subsoil and topsoil. Where beds are sloping, ensure that topsoil is graded to the specified levels below pavement & grass surfaces within 400mm of the edges of the bed. This is to allow for sheet mulch and bark or wood chip mulch so that mulch does not spill out on to pavements and also to allow surface water to drain from paths on to planted areas.

4. For sloping areas to be turfed adjacent to paved areas, topsoil levels shall be graded flush with the finished pavement level (or up to 10mm below).to allow surface water to drain from pavements to soft areas. Soil of grass areas should therefore never be proud of paved areas. Soil levels more than 10 mm below pavement edges will cause mower damage on cutting.

5.Imported topsoil (where specified and sanctioned by the employer) for making up ground, shall conform to BS 3882: 2015, and be free from rocks (over 50mm diameter), concrete, roots, wire and brick, and have less than greater than 20% clay. Such soil shall be cultivated as set out above. Representative samples shall first be approved by the landscape architect before being supplied to site. No imported soil shall be supplied to site without a written instruction.

C) Planting

1. All planting must be carried out in accordance to the specification and schedule of quantities accompanying these drawings. Refer to the specification for the preparation of existing topsoil and required depths for planting, turfing, and standard trees, and also for maintenance requirements.

2. No substitutions will be accepted without the prior agreement of the inspecting landscape architect. The contractor shall replace at once at his own cost any stock size, species or variety of plant which has not been specified on the planting plan and schedule, unless prior agreement to a substitution by the landscape architect has been received. All plants shall be true to size specified in the schedule of plants and associated notes. (3L pots are 19cm diameter and 15cm deep). All shrubs, (other than ground cover), shall be 60/-600mm height and spread, or otherwise specified for the pot size by the HTA National Plant Specification and be bushy, healthy, disease free stock, not pot bound, leggy or spindly. There should be a minimum of 5 breaks per shrub. This specification is the minimum standard required and any stock falling below this standard, in the sole opinion of the inspecting landscape architect,shall be lifted and replaced at the contractor's expense.

3. All shrubs, herbaceous plants, whips and transplants shall be watered in on planting with 20 litres per square metre. Trees shall be watered in with 25 litres per tree position. Water thereafter during the contract period at weekly intervals with 30 litres of water.

4. Proposed large feathered or standard trees to be true to the species, variety and size as specified on the planting plan, to include 1.6m chestnut stake 600mm above ground and 1000mm below ground) and 1No. sackcloth tie with spacing device positioned 25mm maximum from the top of the post.

5. Turf to be of cultivated grade such as Rowlawn "Medallion", or other of similar quality and source, approved by the landscape architect. The contractor shall replace at once any turf rejected by the landscape architect at his own cost.

6.Self clinging climbing shrubs or wall shrubs, with "S" drawn after the climber name, shall be trained to the wall/fence with heavy duty, plastic coated garden wire. Training wires shall be attached vertically to the wall/fence by means of 125mm long stainless steel eye screw fittings. Position 1No. at 250mm from ground, and 1No. 250mm from top of the wall/fence, and string the wire tightly between the fittings. Train the climber to the wire with plastic coated garden wire tags.

7. Twining varieties of climber, with "T" drawn after the climber's name (in specially prepared pits or general shrub beds) shall be trained to walls/ fences by threading ready-made trellis panels 1.8 x 1.8m generally (but 1.8 x 0.6m for corners or where space is restricted). Include for adapting any panels for locations where walls or fences are lower than 1.8m. Fix trellis panels to the walls/ fences using non rusting screws 125mm long (to be approved), incorporating 50mm cube wood spacing blocks to ensure that the panel is mounted sufficiently far from the wall/ fence to allow twining of stems. Ensure that all timber is pressure impregnated with a non phyto-toxic preservative and then painted with a dark brown non phyto-toxic preservative wood stain such as Sadolin "Classic" walnut or similar and approved. Ensure that the trellis is not in contact with the ground. Train the climbing shrub to the trellis with plastic coated garden wire tags.

8. Climbers specified outside proposed shrub beds shall have specially prepared pits/beds 1m diameter. Climb pits shall be 400mm x 400mm and 600mm deep (minimum size), and be backfilled with topsoil (from site - unless otherwise agreed). Ensure the base of the pit is thoroughly broken up and free draining before back filling with topsoil.Ensure no damage to foundations and services, and make good all structures and surfaces disturbed. Fertilise with 50g of Hortilase CRF (16-8-12) slow release fertilizer. Water with 15 litres of water per climber pit.

D) Mulch

1. When specified by the additional specification notes on this plan, supply and spread suitable biodegradeable sheet mulch over planting beds, previously, cultivated, graded and fertilized topsoil before planting, and peg down at a minimum of 500mm centres, (300mm at edges) and beds less than 1m wide. Pegging this density is essential to prevent flaps of material becoming exposed. Refer to the specification for biodegradable sheet mulch on plan.

2. Following planting supply and spread evenly Wood Chip to a depth of 50mm (75mm if no sheet mulch specified), over all planted areas. Finished mulch levels shall be no higher than 15mm below pavement or grass levels to avoid any spillage onto pavements or lawns. N.B. no substitution of mulch type will be acceptable. It is essential to have a dis-flows, large particled, brown wood chip to reduce weed growth, reduce wind blow and prevent rapid break down.

E) BS codes

1. All workmanship and materials shall conform to the following codes:-
A) General landscape operations (excluding hard surfaces)- BS 4428:1989.
B) Trees in relation to construction- BS 5837: 2012 and BS 6549:1999. BS 3998:2010 (recommendations for tree works.) unless otherwise specified. Arboricultural Association - Standard Conditions of Contract and Specifications of Tree Works 1996.
C) Nursery stock in accordance with latest horticultural trade association nursery stock specification entitled "National Plant Specification 2003".
Plants shall conform to:
-BS 3936:- 2014 Trees from Nursery to Independence in the Landscape
-BS 3936-1 : 1992 Nursery Stock - Specification for trees and shrubs.
-BS 3936-2 : 1990 Nursery Stock- Specification for roses + AMD 6628.
-BS 3936- 4 : 2007 Nursery stock- Specification for forest trees.
-BS 3936-9 : 1998 Nursery stock- Specification forbulbs, corms and tubers.
-BS 3936-10 : 1990 Nursery stock- Specification for ground cover shrubs.
-CPSE Committee for Plant Establishment, Handling and establishing landscape plants 1996, Part 3, paragraph 6.2 to 6.6.
D) Glossary for Landscape Works BS 4428 :1989
E) Turf - BS 3969:1998- recommendations for turf for general purposes.

NB. Hedges adjacent to gravel areas shall have the cultivated strip separated from gravel by a timber edge 75 x 25mm of ACQ treated softwood stained with 2No. coats of Sadolin "Classic" colour 'Walnut' (dark brown wood stain) according to specification.

SPECIFICATION FOR HEDGE PLANTING

SPECIFICATION FOR NATIVE AND SEMI-NATIVE HEDGES e.g. Mixed native species, Carpinus betulus & Fagus sylvatica

Hedges containing native and semi-native planting in mixes shall be planted in two straight rows and 250mm apart at a density of 6 plants per linear metre. The two rows shall be placed in the centre of the bed and shall be offset so that the plants are alternate and not opposite each other. Plants to be open ground stock 600-800mm high.



SPECIFICATION FOR ORNAMENTAL HEDGE PLANTING - LARGE GROWING SPECIES e.g. Osmanthus heterophyllus, Ligustrum ovalifolium, Viburnum tinus, Cotoneaster lacteus, Euonymus japonicus 'Aureopictus', Escallonia 'Apple Blossom' & Griselinia littoralis.

Hedges containing large ornamental species shall be planted in a single straight row at a density of 3 plants per linear metre. The row shall be placed in the centre of the bed. Hedge plants to be 3L container grown stock, 400-600mm height and spread unless otherwise stated.

SPECIFICATION FOR ORNAMENTAL HEDGE PLANTING - SMALL GROWING SPECIES e.g. Buxus sempervirens, Osmanthus delavayi, Lavendula spica 'Hidcote,' Hebe topiaria & Lonicera nitida.

Hedges containing small ornamental species shall be planted in a single straight row at a density of 3 plants per linear metre. The row shall be placed in the centre of the bed. Hedge plants to be 3L container grown stock, 300-400mm height and spread unless otherwise stated.

CDM RISK ASSESSMENT

Within this CDM risk assessment any risk has been reviewed during the design stages and in house checking procedure. The purpose of this notification is to identify any significant hazards related to design work by James Blake Associates only, which constitutes to a significant hazard being defined as a unforeseeable hazard which is not likely to be obvious to a competent contractor or other designer or unusual or difficult to manage effectively. This is in accordance with Regulation 13 (Requirements of the Designer) of the CDM Regulations 1994 (amended 2015).

It is assumed that other designers or contractors have been notified by the client , principle designer or principle contractor of an pre existing hazards or difficulties of management situations present. A certain level of Health and Safety management is assumed reference to Management of Health and Safety at Work Regs 1999; Provision and Use of Work Equipment Regs 1998; Personal Protective Equipment at Works Regs 2002; Manual Handling Operations Regs 1992 etc).

ITEM	RISK LEVEL	HAZARD/RISK
EXCAVATION, CONSTRUCTION, COMPACTION AND SOIL PREPARATION NEAR EXISTING TREES BOTH ON AND OFF THE SITE	MEDIUM	HAZARD TO SAFETY OF WORKERS, USERS OF ADJACENT LAND AND FUTURE USERS OF THE SITE BY DAMAGED TREES
EXCAVATION OF TREE PITS NEAR OR ADJACENT TO UNDERGROUND SERVICES	HIGH	DAMAGE TO SERVICES AND HAZARD TO SAFETY OF WORKERS

*A list of James Blake Associates Approved Landscape Contractors is available on request.

GENERAL NOTES
-ALL DIMENSIONS IN MILLIMETRES
-DO NOT SCALE OFF THIS DRAWING
-ALL DIMENSIONS TO BE CHECKED ON SITE
(C)JAMES BLAKE ASSOCIATES LTD 2020

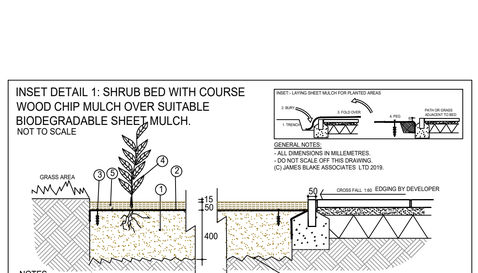

SCHEDULE OF PLANTS

SHRUBS

QTY	CODE	PLANT NAME	STOCK	SPACING	CPE	DFB	MIXH	HEIGHT	SPREAD
90No.	Aucs Var	Aucuba japonica "Variegata"	C.G. 10L	3/m2	C		600-800	600-800	
74No.	Ber Pur	Berberis cornifolia "Purpurea"	C.G. 5L	4/m2	-		100-200	100-200	
64No.	Bra Sun	Brachyglottis dunedin "Sunshine"	C.G. 5L	3/m2	B		200-300	200-300	
7No.	Ces Sky	Ceanothus "Skylark"	C.G. 5L	3/m2	B		300-400	300-400	
63No.	Chs Kel	Choisya ternata "Aztec Pearl"	C.G. 10L	3/m2	C		400-600	400-600	
8No.	Chs Gol	Choisya dewitteana "Aztec Gold"	C.G. 10L	3/m2	C		400-600	400-600	
22No.	Chs Sun	Choisya ternata "Sundance"	C.G. 10L	3/m2	C		400-600	400-600	
10No.	Co cor	Cotoneaster corbaiensis	C.G. 5L	3/m2	B		300-400	300-400	
8No.	Co tor	Cotoneaster tomentosus	C.G. 5L	3/m2	B		300-400	300-400	
32No.	Cs Sun	Cistus x hybridus "Sunrise"	C.G. 5L	3/m2	B		300-400	300-400	
13No.	Cor Spa	Cornus alba "Sparkle"	C.G. 5L	3/m2	B	2.0	25-400	400-600	
19No.	Ely Sow	Elyna/carex "Bowles's Mauve"	C.G. 5L	3/m2	-		200-300	200-300	
8No.	Euo Aur	Euonymus japonicus "Chalice Aurea"	C.G. 5L	3/m2	C		400-600	400-600	
57No.	Eut Eme	Euonymus fortunei "Emerald Gaiety"	C.G. 5L	3/m2	A		200-300	200-300	
20No.	Eut Gol	Euonymus fortunei "Emerald 'n' Gold"	C.G. 5L	3/m2	B		300-400	300-400	
32No.	Eut Bra	Euonymus japonicus "Bravo"	C.G. 10L	3/m2	B		600-800	600-800	
23No.	Eut Bo	Euonymus fortune "Blondi"	C.G. 5L	3/m2	B		300-400	300-400	
69No.	Eut Pre	Euonymus "President Gauller"	C.G. 5L	3/m2	B		400-600	400-600	
8No.	Ger Ing	Geranium macrorrhizum "Ingwersen's Var	*C.G. 5L	5/m2	-		100-200	100-200	
9No.	Ger Jul	Geranium pratense "Johnson Blue"	C.G. 5L	5/m2	-		100-200	100-200	
8No.	Ger Roz	Geranium "Rozanne"	C.G. 5L	5/m2	-		100-200	100-200	
8No.	Ger War	Geranium x oxonianum "Wargrave Pink"	C.G. 3L	5/m2	-		100-200	100-200	
8No.	Heb Mel	Hebe "Midsummer Beauty"	C.G. 10L	3/m2	C	1.5	300-400	300-400	
219No.	Heb Mat	Hebe "Mattie"	C.G. 4/5L	4/m2	B		300-400	300-400	
138No.	Heb ale	Hebe "alakanui"	C.G. 4/5L	4/m2	B		300-400	300-400	
7No.	Heb Sut	Hebe "Sutherlandii"	C.G. 5L	4/m2	A		300-400	300-400	
8No.	Hyd Gra	Hydrangea paniculata "Grandiflora"	C.G. 10L	3/m2	B		400-600	400-600	
111No.	Hyp Hid	Hypericum "Hidcote"	C.G. 5L	3/m2	C		600-800	600-800	
3No.	Lav Hid	Lavandula angustifolia "Hidcote"	C.G. 5L	4/m2	A		300-400	300-400	
13No.	Lon Nig	Lonicera nitida "Baggesen's"	C.G. 5L	3/m2	B		300-400	300-400	
24No.	Lon pil	Lonicera pileata	C.G. 3L	3/m2	B		300-400	300-400	
3No.	Nan Fir	Nandina domestica "Fire power"	C.G. 5L	3/m2	B		300-400	300-400	
73No.	Nan Len	Nandina domestica "Lemlim"	C.G. 5L	3/m2	B		300-400	300-400	
8No.	Ph fru	Phlomis fruticosa	C.G. 5L	3/m2	B		400-600	400-600	
21No.	Ph Aur	Philadelphus coronarius "Aureus"	C.G. 5L	3/m2	D	2.5	400-600	400-600	
8No.	Phv Var	Phormium tenax "Variegata"	C.G. 10L	2/m2	-		800-1000	800-1000	
7No.	Phv ten	Phormium tenax	C.G. 10L	2/m2	-		800-1000	800-1000	
64No.	Phs jas	Phormium "Jester"	C.G. 10L	3/m2	-		800-1000	800-1000	
39No.	Phv Yel	Phormium tenax "Yellow Wave"	C.G. 10L	2/m2	-		800-1000	800-1000	
7No.	Pot Eli	Potentilla fruticosa "Elizabeth"	C.G. 5L	3/m2	B	0.75	300-1000	800-1000	
30No.	Phs Com	Photinia x fraseri "Robusta Compacta"	C.G. 5L	3/m2	B		400-600	400-600	
9No.	Pot Abb	Potentilla fruticosa "Abbotswood"	C.G. 5L	3/m2	B		300-400	300-400	
7No.	Pot Eli	Potentilla fruticosa "Elizabeth"	C.G. 5L	3/m2	B		400-600	400-600	
4No.	Pel Red	Pelargonium "Scented Mixed"	C.G. 5L	3/m2	B		400-600	400-600	
8No.	Pru Ott	Prunus laurocerasus "Otto Luyken"	C.G. 5L	3/m2	B		400-600	400-600	
72No.	Rha Fro	Rosa "Flower Carpet"	C.G. 5L	3/m2	B		300-400	300-400	
81No.	Ros Bon	Rosa "Bonica"	C.G. 3L	3/m2	B		300-400	300-400	
14No.	Ros pre	Rosa pheasant	C.G. 3L	3/m2	A		300-400	300-400	
6No.	Sal sup	Salvia superba	C.G. 3L	4/m2	-		200-300	200-300	
3No.	Ski Rub	Skimmia japonica "Rubella"	C.G. 5L	4/m2	F	4.5	300-400	300-400	
39No.	Spi Gol	Spiraea japonica "Goldflame"	C.G. 5L	3/m2	B		300-400	300-400	
4No.	Spi Pri	Spiraea japonica "Golden Princess"	C.G. 5L	3/m2	B		300-400	300-400	
141No.	Vib dav	Viburnum davidii	C.G. 3L	3/m2	B		300-400	300-400	
7No.	Vib Mar	Viburnum opulus "Mariesii"	C.G. 10L	3/m2	D	2.25	400-600	400-600	
29No.	Vib tin	Viburnum tinus "Eve Price"	C.G. 5L	3/m2	D	2.25	400-600	400-600	

GRASSES AND SEDGES

QTY	CODE	PLANT NAME	STOCK	SPACING
24No.	Cal Eve	Calamagrostis acutiflora "Evergold"	C.G. 3L	5/m2
12No.	Car bri	Carex morrowii "Irish Green"	C.G. 3L	5/m2

SPECIMENS PLANTED IN BEDS, GRASS OR GRAVEL

QTY	CODE	PLANT NAME	STOCK	SHC	DFB
8No.	ARE SEP	Arethorne japonica "September Charm"	C.G. 3L	-	
7No.	CHO ACT	Choisya ternata "Aztec Pearl"	C.G. 10L	C	
3No.	CHO SUN	Choisya ternata "Sundance"	C.G. 10L	C	
3No.	COR AVE	Corylus avellana	C.G. 10L	E	3.75
2No.	COR PUR	Corylus maxima "Purpurea"	C.G. 10L	E	4.5
2No.	DRY AFF	Dryopteris affinis	C.G. 3L	-	
12No.	DRY ERY	Dryopteris erythrosora	C.G. 3L	-	
3No.	EUO GOL	Euonymus fortunei "Emerald 'n' Gold"	C.G. 3L	A	
1No.	HYD QUE	Hydrangea quercifolia	C.G. 10L	E	3.15
8No.	PHO JES	Phormium tenax "Jester"	C.G. 10L	-	
2No.	TAX HIC	Taxus x media "Hicksii" min 1.5m high root ball or container	C.G. 15L	D	1
1No.	THU SMA	Thuja occidentalis "Smaragd" min 1.5m	high C.G. 15L	D	1
3No.	VIB OPU	Viburnum opulus "Notcutts Var."	C.G. 10L	E	3.75

BULB PLANTING MIXES

QTY	PLANT NAME	STOCK	SPACING
110m2	Bulb planting mix A		
223No.	10% Crocus "Dutch Yellow"	bulb	20/m2
223No.	10% Galanthus nivalis	bulb	20/m2
445No.	20% Narcissus "Pencha"	bulb	20/m2
1100No.	50% Hyacinthoides non-scripta	bulb	20/m2
223No.	10% Leucojum vernum	bulb	20/m2

TOPIARY SPECIMEN SHRUBS/TREES PLANTED IN BEDS, GRASS OR GRAVEL

QTY	CODE	PLANT NAME	STOCK	SHC	DFB
3No.	TOP BAY	Topiary Bay (Laurus nobilis)	C.G. 10L	F	8
4No.	TOP BOXC	Topiary Buxus sempervirens cone ht 1m	C.G. 10L	C	

CLIMBERS

QTY	CODE	PLANT NAME	STOCK	SPACING	DFB
4No.	Cle Sno	Clematis armandii "Snowdriff"	*T*.C.G. 3L	1/m	3

FEATHERED TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX.H	WD
3No.	Ace nam	Acer campestre	C.G.	FTH	18/-20/cm	12m	20m M
19No.	Aln glu	Alnus glutinosa	C.G.	FTH	18/-20/cm	14m	18m M
3No.	Ame Rob	Amelanchier lamarckii "Robin Hill"	C.G.	FTH	15/-18/cm	7m	8m M
6No.	Bet pen	Betula pendula	C.G. 15L	FTH	18/-21/cm	7m	14m L
19No.	Bet pen	Betula pendula	C.G. 15L	FTH	18/-21/cm	7m	14m L
2No.	Car bet	Carpinus betulus	C.G.	FTH	18/-21/cm	9m	17m L
12No.	Cas sat	Castanea sativa	C.G.	FTH	18/-21/cm	15m	24m M
3No.	Fag syl	Fagus sylvatica	C.G. 15L	FTH	18/-21/cm	15m	20m M
4No.	Fag pur	Fagus sylvatica purpurea	C.G. 15L	FTH	18/-21/cm	15m	20m M
1No.	Mal Cor	Malus domestica "Czar"	C.G.	FTH	18/-21/cm	5m	4m M
2No.	Mal zum	Malus "zumi Cheerio"	C.G.	FTH	18/-21/cm	5m	4m M
1No.	Mal zum	Malus "zumaprid"	C.G.	FTH	18/-21/cm	5m	6m M
2No.	Mal syl	Malus sylvestris	C.G.	FTH	18/-21/cm	8m	10m M
7No.	Pop nig	Populus nigra	C.G.	FTH	18/-21/cm	35m	30m H
7No.	Pop tre	Populus tremula	C.G.	FTH	18/-21/cm	25m	30m H
1No.	Pru Ame	Prunus "Amanogawa"	C.G.	FTH	18/-21/cm	6m	6m M
8No.	Pru avi	Prunus avium	C.G.	FTH	18/-21/cm	13m	17m M
1No.	Pru dom	Prunus domestica	C.G.	FTH	18/-21/cm	7m	6m M
1No.	Pru vir	Prunus "Victoria"	C.G.	FTH	18/-21/cm	10m	8m M
2No.	Pyr com	Pyrus communis	C.G.	FTH	18/-21/cm	7m	5m M
1No.	Pyr Cer	Pyrus "Conference"	C.G.	FTH	18/-21/cm	10m	10m M
6No.	Que rob	Quercus robur	C.G. 15L	FTH	20/-25/cm	25m	20m H
1No.	Sal alb	Salix alba	C.G.	FTH	18/-21/cm	20m	24m H
2No.	Sal Cri	Salix x sepulcralis "Chrysocoma"	C.G.	FTH	18/-21/cm	20m	16m H
3No.	Til cor	Tilia cordata	C.G.	FTH	18/-21/cm	17m	22m M

STANDARD TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX.H	WD
8No.	ACE CAM	Acer campestre	C.G.	STD	8-10/cm	17m	22m M
11No.	ACE STR	Acer campestre "Streetwise"	C.G.	STD	10-12/cm	8m	8m M
7No.	ALN COR	Alnus cordata	C.G.	STD	10-12/cm	12m	15m M
3No.	ALN GLU	Alnus glutinosa	C.G.	STD	10-12/cm	14m	18m M
2No.	AME REG	Amelanchier lamarckii "Robin Hill"	C.G.	STD	8-10/cm	7m	8m M
1No.	BET FAS	Betula pendula "Fastigiata Joes"	C.G. 15L	STD	8-10/cm	3m	5m L
9No.	BET PEN	Betula pendula	C.G. 15L	STD	8-10/cm	7m	14m L
6No.	CAR BET	Carpinus betulus	C.G.	STD	8-10/cm	9m	17m L
2No.	CAR FRA	Carpinus betulus "Frans Fontaine"	C.G.	STD	8-10/cm	8m	16m L
1No.	FAG SYL	Fagus sylvatica	C.G. 20L	STD	8-10/cm	10m	20m M
1No.	MAL JOH	Malus "John Downie"	C.G.	STD	8-10/cm	5m	6m M
1No.	MAL FLO	Malus floribunda	C.G.	STD	8-10/cm	5m	6m M
1No.	PLA HIS	Platanus x hispanica	C.G.	STD	10-12/cm	20m	28m M
11No.	PRU AMA	Prunus "Amanogawa"	C.G.	STD	8-10/cm	4m	6m M
2No.	PRU UMI	Prunus "Umineko"	C.G.	STD	8-10/cm	5m	8m M
14No.	PYR CHA	Pyrus calleryana "Chanticleer"	C.G.	STD	8-10/cm	6m	8m M
2No.	QUE ILE	Quercus ilex	C.G. 20L	STD	10-12/cm	20m	16m H
2No.	QUE ROB	Quercus robur	C.G. 20L	STD	10-12/cm	25m	20m H
3No.	SOR LUT	Sorbus aria "Lutescens"	C.G.	STD	8-10/cm	9m	12m M
8No.	TIL COR	Tilia cordata	C.G.	STD	10-12/cm	17m	22m M

HEAVY STANDARD TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX.H	WD
2No.	ACE STR	Acer campestre "Streetwise"	R.B.	HVSTD	12-14/cm	8m	8m M
2No.	PRU AMA	Prunus "Amanogawa"	R.B.	HVSTD	12-14/cm	6m	8m M
4No.	PYR CHA	Pyrus calleryana "Chanticleer"	R.B.	HVSTD	12-14/cm	8m	8m M

EXTRA HEAVY STANDARD AND SEMI MATURE TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX.H	WD
1No.	ACE CAM	Acer campestre	R.B.	HVSTD	14-16/cm	11m	12m M
16No.	ACE STR	Acer campestre "Streetwise"	R.B.	HVSTD	14-16/cm	8m	8m M
4No.	ALN SPA	Alnus x spaethii	R.B.	HVSTD	14-16/cm	15m	17m M
3No.	BET FAS	Betula pendula "Fastigiata Joes"	R.B.	HVSTD	14-16/cm	9m	14m L
1No.	BET PEN	Betula pendula	R.B.	HVSTD	14-16/cm	7m	14m L
8No.	CAR BET	Carpinus betulus	R.B.	HVSTD	14-16/cm	9m	17m L
8No.	CAR FRA	Carpinus betulus "Frans Fontaine"	R.B.	HVSTD	14-16/cm	8m	16m L
1No.	PRU AMA	Prunus "Amanogawa"	R.B.	HVSTD	14-16/cm	6m	8m M
2No.	PRU UMI	Prunus "Umineko"	R.B.	HVSTD	14-16/cm	5m	8m M
2No.	PYR CHA	Pyrus calleryana "Chanticleer"	R.B.	HVSTD	14-16/cm	8m	8m M
2No.	SOR LUT	Sorbus aria "Lutescens"	R.B.	HVSTD	14-16/cm	9m	12m M
8No.	TIL COR	Tilia cordata	R.B.	HVSTD	14-16/cm	17m	22m M
3No.	TIL GRE	Tilia cordata "Greenspire"	R.B.	HVSTD	20-25/cm	19m	16m M

CONIFEROUS TREES

QTY	CODE	PLANT NAME	STOCK	SIZE	DFB	MAX.H	WD
1No.	Ced lib	Cedrus libani	C.G. 15L	CON	125-150/cm	11m	10m M
1No.	Ilex Aqu	Ilex aquifolium	C.G