



Project Name: Land West of Brook Lane,
Rustington and South of A259 – F1

Flood Risk Assessment

Date: April 2017

Project Number: A3992

Contents

Document Status and Signatures	3
Executive Summary	4
1 Introduction	6
2 Development Description and Location	7
2.1 Description of Existing Site	7
2.2 Permeable and Impermeable Areas	8
2.3 Topographical Information	8
2.4 Existing Drainage	8
2.5 Soil Investigation	9
2.6 Proposed Development	10
3 Flood Zones	11
3.1 Introduction	11
3.2 Sequential Test	12
3.3 Appropriate Uses	12
4 Site Specific Flood Risk Assessment	13
4.1 Sources of Flooding	13
4.2 Flooding from Rivers and the Sea	13
4.3 Groundwater	20
4.4 Flooding from Sewers and Drainage	21
4.5 Overland Flows	22
4.6 Flooding from Water Infrastructure	24
4.7 Flooding from Development Drainage	25
4.8 Summary of Flood Risk	25
5 Drainage Strategy	26
5.1 Drainage Design	26
5.2 Existing Greenfield Run-Off Rates	26
5.3 Existing volume of run-off	26
5.4 Unmitigated Proposed Peak Surface Water Flows	27
5.5 Proposed Surface Water Drainage Strategy	28
6 Conclusions	31

Appendices:

Appendix A – Existing and Proposed Area Plans

Appendix B – Topographic Survey

Appendix C – Architects Proposals

Appendix D – Environment Agency Modelled Flood Levels

Appendix E – Modelled Floodplain Extension


Appendix F – Surface Water Drainage Calculations

Appendix G – Schematic Surface Drainage Layout Drawing

Document Status and Signatures

Document Status		
Document Reference: A3992/Brook Lane, Rustington – Flood Risk Assessment		
Issue Date	Version	Rev
29.02.2017	Draft	D1
06.03.2017	Draft	D2
03.04.2017	Final	F1

File location: N:\Jobs\A3750_A3999\A3992\Reports and Specifications\FRA

Signed on behalf of CTP	
	
Prepared by:	Maria Orellana – BEng (Hons) (Civil Engineer)
	
Reviewed by:	P N Hawkins BEng (Tech) Hons CEng MICE

Executive Summary

This Flood Risk Assessment has been undertaken for the proposed demolition of existing buildings on site and the erection of a mixed use development comprising residential units and care home (Use Class C2 and C3) and ancillary facilities including a railway crossing together with associated access, car parking and landscaping at land to west of Brook Lane and south of A259, Rustington, West Sussex, BN16 3JL. This assessment has been prepared in compliance with guidance given in the National Planning Policy Framework (NPPF) and Technical Guidance (March 2012).

The Environment Agency Flood Risk maps indicate that the proposed development site is partly situated in Flood Zone 1, Flood Zone 2 and 3. It is required that the Local Planning Authority apply the sequential test. In accordance with Table 2 and Table 3 of the NPPF the new development is considered as "More Vulnerable". The latest development planning layout indicates that all buildings are located in Zones 1 and 2 and are appropriate for this development. An Exception Test is not required.

The Environment Agency flood modelling for the tributary of the River Arun in the vicinity of the site has been obtained. The 1 in 100 year plus climate change 0.5% (2110) modelled design flood level for the site is 1.630mAOD. A minimum floor level of 1.93mAOD is recommended to comply with the Environment Agency's standing advice. It is recommended that flood resilient construction up to the first floor level is provided, to provide mitigation against the potential impact of the tidal defended 1 in 200 year plus Climate Change modelled level of 2.740m AOD. Residents of the new development shall be signed up to the Environment Agency's flood warning system for the tributary of the River Arun. An emergency Flood Plan shall be provided for the development. An emergency Flood Plan shall be provided for the development.

The risk of flooding from the different possible key sources has been assessed. This assessment has deemed that the risk of flooding from other sources at the site is low.

An assessment of the risk of flooding from the different possible key sources taken from the NPPF list which could potentially affect the development site has been undertaken. According to the available information, this assessment has deemed that the risk of flooding from other sources at the site is low.

The proposals result in an increase of the impermeable area and to mitigate the increase in surface water discharge rate, sustainable drainage (SUDS) attenuation methods have been proposed. These measures would result in the peak surface water flows and additional volume being limited to the greenfield run-off rates for all storm return periods up to a 1 in 100 year storm event plus an allowance of 40 % for climate change.

Shallow infiltration measures, such as permeable paving, are required to achieve these run-off rates. It is proposed that the houses fronting hard landscaping and parking areas will be constructed from permeable paving blocks overlaying a permeable sub-base with infiltration into the ground. Also, Arun District Council seeks the implementation of ponds within developments where there are suitable areas available. There are suitable areas for new open water features within the site located in Flood Zone 1 and outside the floodplain area. Attenuation of rain water in ponds and open water features will then be considered further.

It is possible that in some areas of the site it will not be possible to use permeable paving or to discharge to the proposed ponds due to the ground water table level. Attenuation tanks are proposed in this situation and the proposed attenuation volumes have been sized to adequately convey storm events up to and including the 100 year storm events including an allowance of 40% for climate change. The storage volume design has been carried using Microdrainage Windes software. These calculations are included in Appendix F. The surface water drainage proposals have been provided in the schematic drainage layout drawing included in Appendix G.

1 Introduction

- 1.1 CTP have been engaged by Store Property Investments Ltd to prepare a site specific flood risk assessment as part of the planning application for the proposed works at the land west of Brook Lane and south of A259, Rustington, Littlehampton, West Sussex, BN16 3JL.
- 1.2 The flood risk assessment has been prepared in compliance with guidance given in the National Planning Policy Framework (NPPF) and Technical Guidance (March 2012).
- 1.3 The assessment covers the identification of all sources of flooding, their impact on the development, their residual risk and mitigation. A strategy for surface water drainage has also been included.
- 1.4 CTP Consulting Engineers are appropriately qualified professionals with the skills and experience to design surface water drainage systems to incorporate Sustainable Drainage (SuDS) and to carry out Flood Risk Assessments.
- 1.5 CTP has no responsibility to any other parties to whom this report may be circulated, in part or in full, and any such parties rely on the contents of this report solely at their own risk.
- 1.6 All copyright and other intellectual rights in and over this report and its contents shall remain vested in CTP. Store Property Investments Ltd and any person authorised by them is granted an irrevocable royalty free licence to use and reproduce this report for all purposes relating to the property but CTP shall not be liable for any use of the report for any purpose other than that for which it was originally prepared.

2 Development Description and Location

2.1 Description of Existing Site

- 2.1.1 The proposed development is situated off Brook Lane, Rustington, Littlehampton, West Sussex, BN16 3JL. The site lies adjacent to the A259 running north and west of the site. A railway line delimits the south boundary of the site and the east is delimited by Brook Lane which provides access to the existing site. A watercourse collecting water from the east passes through the area and discharges to the Black Ditch on the other side of the A259. A shallow ditch also crosses the site. The site location is shown in Figure 1 and Figure 2.

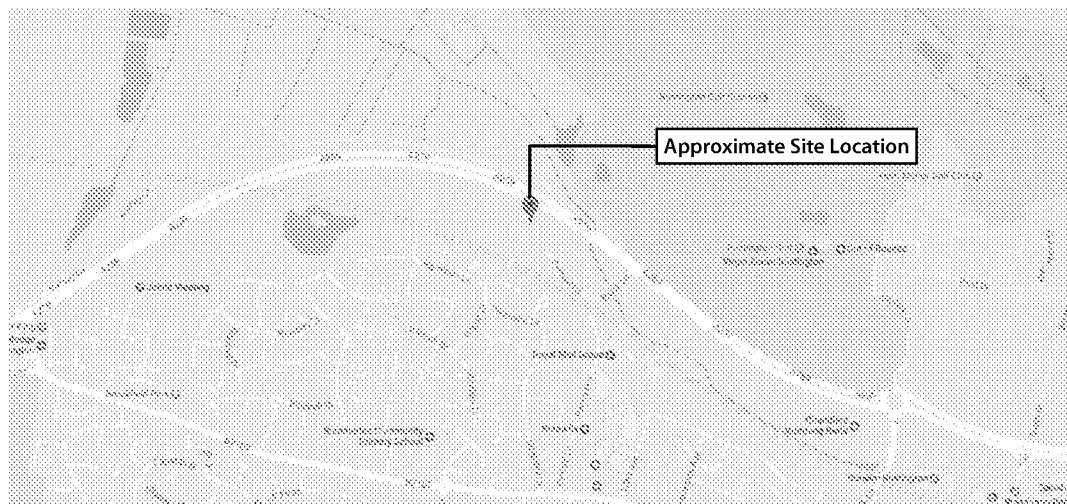


Figure 1: Site Location

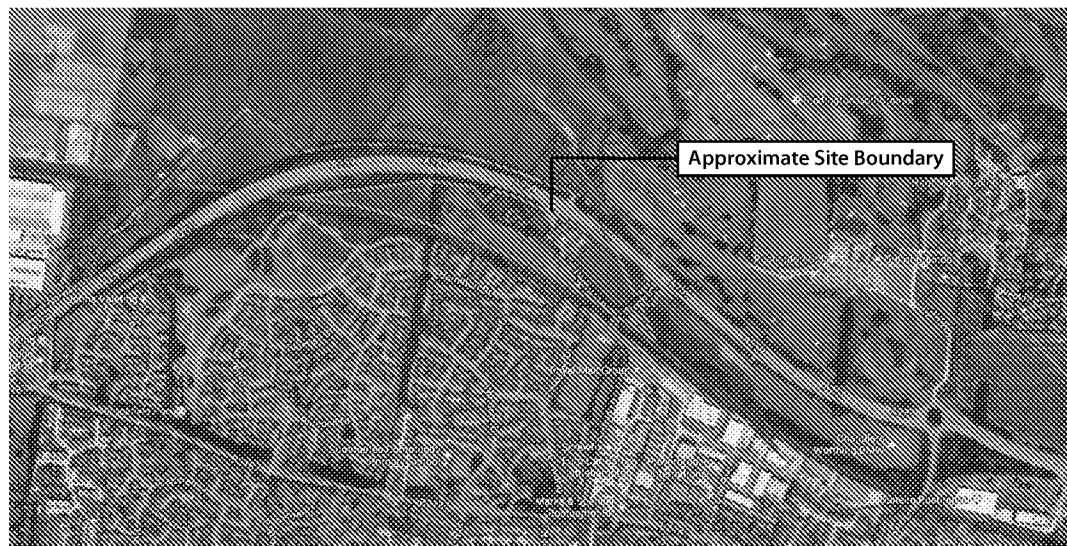


Figure 2: Site Location Plan (approximate site boundary shown in red)

2.2 Permeable and Impermeable Areas

- 2.2.1 The existing site consists mainly of grazing land and comprises a residential property and stables with associated landscaped areas, car parking areas, access roads and storage buildings. With reference to the existing area plan included in Appendix A of this document a summary of the existing site areas is as follows:

Site Application Boundary Area:	59,211 m ²
Existing Soft Landscaped Area	54,930 m ²
Existing Building Area:	1,411 m ²
Existing Hard Landscaping Area:	1,029 m ²
Existing Highway Area:	1,841 m ²

2.3 Topographical Information

- 2.3.1 A topographic survey of the existing site has been undertaken. The survey shows that the site slopes from southwest to northeast, with a small peak in the centre of the south side. The levels range between 4.90m and 1.00 AOD approximately. The levels over the majority of the site are no lower than 1.60m AOD.
- 2.3.2 The topography also shows a shallow depression on the west corner connected to a pond located in the site across the railway through a 230mm diameter culvert pipe. The location map doesn't show any trace of a pond so this shallow depression is likely just an infiltration area with an overflow to the neighbouring pond via the culvert.
- 2.3.3 The topographic survey of the site is included in Appendix B.

2.4 Existing Drainage

- 2.4.1 The topographic survey of the existing development site indicates that there are some manholes within the site, therefore a drainage system is located at the site to serve the existing buildings. This survey also indicates a possible cesspit position inside the property.
- 2.4.2 There is no visible evidence of surface water drainage within the site and given the location of the infrastructure, it can be assumed that all surface water discharge is either unrestricted to an existing watercourse or discharges into a soakaway system. Also the existing access road has no visible drainage system and the water follows the topography to lower adjacent lands.

- ## 2.5 Soil Investigation

-
- The screenshot shows the 'Geology of Britain viewer' interface. At the top, the British Geological Survey logo and title are visible. The main map area displays a geological map of the UK, with a red dot and a label 'Approximate Site Location' pointing to a location near Brixton. The interface includes several control panels:
- Top Left:** 'Surface Geology' section with options for 'Superficial only', 'Bedrock only', and 'Bedrock and Superficial'. Below this is a 'British geology' section with a '1:50 000 scale' option and a 'Geology Key' button.
 - Top Right:** 'View Data on this map' section with a 'Data on this map' button and a 'Data on this map' button.
 - Bottom Left:** A list of 'Superficial deposits' with a '1:50 000 scale geology' option.
 - Bottom Right:** A 'Geology Key' section with a list of geological features and their corresponding colors.

2.5.2 The permeability of chalk, sand and gravel would suggest that the permeability of the soil is likely to be high to very high. The onsite soil conditions, soakage potential and groundwater table level should be confirmed by a site investigation.

2.6 Proposed Development

2.6.1 The proposed development involves the demolition of existing buildings on site and the erection of a mixed use development comprising residential units and care home (Use Class C2 and C3) and ancillary facilities including a railway crossing together with associated access, car parking and landscaping. Some alterations are also proposed to the existing access road and landscaped areas. The proposals are shown in the architect's layout included in Appendix C.

2.6.2 With reference to the proposed area plan included in Appendix A of this document a summary of the proposed site areas is as follows:

Site Application Boundary Area:	59,211 m ²
Proposed Soft Landscaping Area:	39,297 m ²
Proposed Public Highway Area:	7,552 m ²
Proposed Hard Landscaping Area:	6,139 m ²
Proposed Building Roof Area:	6,223 m ²
Total Proposed Impermeable Area: (Excluding Public Highway)	12,362 m ²

3 Flood Zones

3.1 Introduction

- 3.1.1 The Environment Agency uses Flood Zones to determine the vulnerability of every new development. These Flood Zones refer to the probability of river or sea flooding affecting the proposals. An interactive Flood Zone map is accessible on the Environment Agency website.
- 3.1.2 It can be seen from an extract from this interactive map (Figure 4) that the proposed site is partially located in Flood Zone 1, Flood Zone 2 and Flood Zone 3. Flood Zone 1 is designated as low probability of flooding. Land in this zone is assessed as having a less than 1 in 1000 annual probability of flooding. Flood Zone 2 is designated as medium probability of flooding. Land in this zone 2 has between a 1 in 100 and 1 in 1000 annual probability of river flooding (1% - 0.1%) or between a 1 in 200 year and 1 in 1000 annual probability of sea flooding (0.5% - 0.1%) in any year. Flood Zone 3 is designated as high probability of flooding. Land in this zone is assessed as having a 1 in 100 or greater annual probability of river flooding (>1%), or a 1 in 200 or greater annual probability of flooding from the sea (>0.5%) in any year.

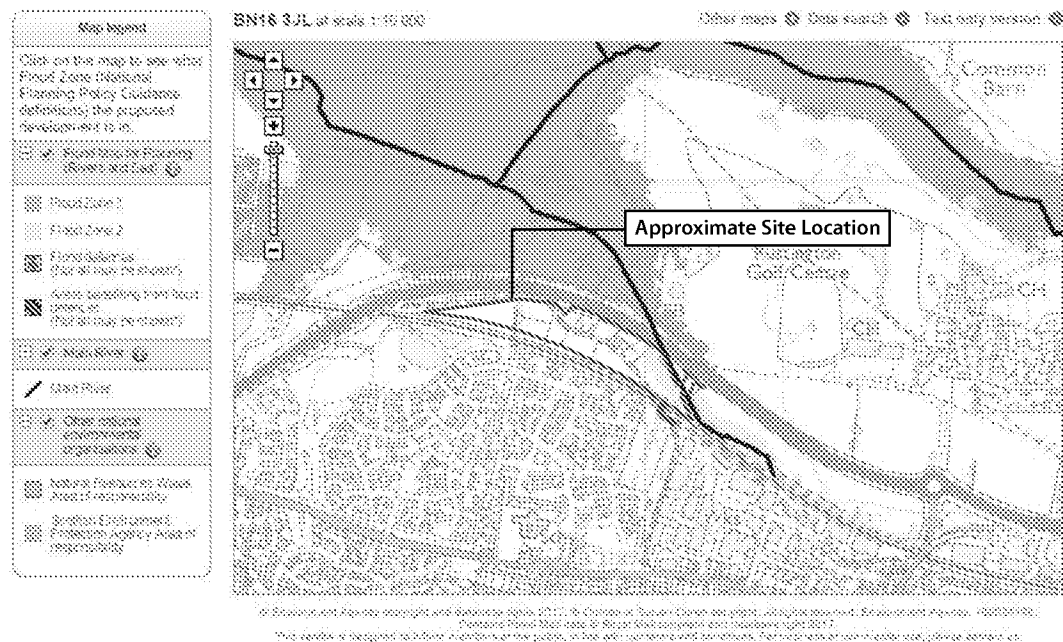


Figure 4: Extract from Environment Agency.

3.2 Sequential Test

- 3.2.1 Parts of the Brook Lane grounds are located in Flood Zones 1, 2 and 3. With reference to Figure 4 the existing and the proposed buildings are located entirely within Flood Zone 1 and 2 and outside of Flood Zone 3. The existing road layout and level allows safe egress to Flood Zone 1 to the south of the site from the proposed new development. It is not proposed to undertake any new development in Flood Zone 3 apart from some alterations to existing landscaping.
- 3.2.2 Since the site is partially located within Flood Zone 2 and Flood Zone 3 the NPPF requires that the Local Planning Authority apply the sequential test to ensure that the development is located in the most appropriate area in terms of use and flood risk.

3.3 Appropriate Uses

- 3.3.1 With reference to Table 2 of the NPPF this proposed residential development and residential care homes uses would be classified as “More Vulnerable”.
- 3.3.2 With reference to Table 3 of the NPPF “More Vulnerable” development in Flood Zone 1 and 2 is appropriate. Therefore, the proposals are appropriate for Flood Zone 1 and Flood Zone 2, and an Exception Test is not required.

4 Site Specific Flood Risk Assessment

4.1 Sources of Flooding

4.1.1 The NPPF lists the key sources of flooding which could potentially affect the development site. An assessment of how these forms of flooding may affect the site and details on how they will be managed safely within the development are considered in the following sections:

1. Flooding from Rivers and the Sea
2. Groundwater
3. Flooding from Sewers and Drainage
4. Overland flows
5. Water Infrastructure
6. Flooding from Development Drainage

4.2 Flooding from Rivers and the Sea

4.2.1 As shown in Figure 3 the Environment Agency Flood Risk Map indicates that the proposed development site is partly located within Flood Zone 1 (low risk of flooding), Flood Zone 2 (medium risk of flooding) and Flood Zone 3 (high probability of flooding). The areas located in flood zones 3 are away from the existing and proposed buildings and are in landscaped areas.

Environment Agency Modelled Flood Levels

4.2.2 A request was made to the Environment Agency for the issue of modelled flood levels for the tributary of the River Arun in the vicinity of the development site (EA Order Reference: SSD/37767) This information is provided in full in Appendix D.

4.2.3 A Flood Map Report for the site has been received from the Environment Agency. It also shows that the site is located in an area benefitting from the Arun East Bank Tidal Walls Flood Defences. The report states that the sites lies in an area with a 0.5% chance of flooding in 2110 from the sea considering the presence of flood defences.

4.2.4 Modelled flood levels for a number of nodes within the vicinity of the development site have been taken from the Lower Tidal River Arun Strategy Study (2010) of the site up to the year 2110 and are included in the flood map report. The defended flood levels have been produced for annual exceedance probability of between 0.5% tide and 1% plus climate change fluvial and 5% tidal and 20% fluvial.

4.2.5 With reference to Modelled Flood Levels the nodes relevant to the site are the shown on Figure 4.

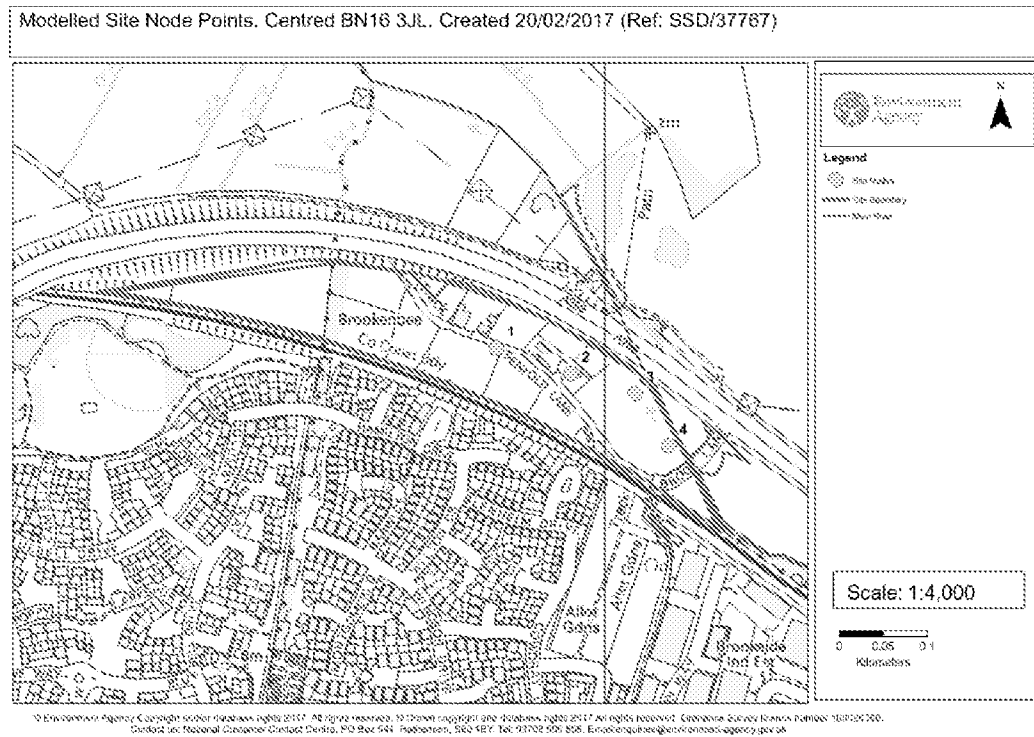


Figure 4: Extract from Environment Agency modelling showing studied nodes along the site.

- 4.2.6 The flood report states that the defended scenarios include the beach profile and show flooding from wave overtopping of defences. The undefended scenarios do not include any wave overtopping. As such, it can be seen that there are greater flood extents for the defended scenarios rather than the undefended.
- 4.2.7 Due to this the Environmental Agency report result of the Tidal undefended model is not relevant in this case and it can be ignored.
- 4.2.8 The flood levels for the site for the different annual exceedance probabilities for the defended and undefended scenarios are as follows:

<u>Undefended</u>		<u>Defended</u>	
Fluvial - 1% plus Climate Change	Tidal – 0.5% (2110)	Fluvial - 1% plus Climate Change	Tidal – 0.5% (2110)
1.630 m AOD	1.960m AOD	-	2.740m AOD

- 4.2.9 Environmental Agency's Littlehampton Arun East Bank-Tidal Walls Flood Defence Scheme (2013) states that the risk of a breach will be present if no works are undertaken to maintain the flood defences along the east bank due to deterioration. The scheme states that the Environmental Agency and Arun District Council should ensure that the Tidal Walls defences are regularly inspected and essential safety works are carried out.
- 4.2.10 In the very unlikely event of a breach it is expected that this will not be a sudden event. Regular inspection is likely to highlight any damage which could have the potential to cause flooding in the vicinity of the defences prior to a breach occurring. This would provide the opportunity for the evacuation of residents within the flood extents area prior to the breach occurring.

Flood Zone Contours

- 4.2.11 The approximate contours of Flood Zones 2 and 3 have been shown in Figure 3. It can be seen that the existing and proposed new buildings are not located in Flood Zone 3. Also it shows that only the proposed care home building is affected by the flood Zone 2 flood envelope in the south east corner.

Finished Floor Level

- 4.2.12 The minimum finished floor level based on the up-to date Environment Agency modelled flood levels is:

Modelled 1 in 100 (1%) Fluvial Water Level (year 2110)	1.630AOD
Freeboard:	0.300m
Minimum Finished Floor Level:	1.930mAOD

- 4.2.13 The existing ground levels around the flooding area are no lower than 1.60m AOD. It is proposed raise the ground level and the building finished floor levels to achieve the finished floor level of 1.93m AOD.
- 4.2.14 Raising the site ground levels to 2.74m AOD has been considered but deemed to be impractical due to the depths of fill being required of approximately 1.20m. This would also result in a large loss of floodplain storage inside the 2.74m AOD tidal flood envelope. The estimated volume is approximately 8,580m³ and details are shown in Appendix E.

- 4.2.15 Flood resilient construction is therefore recommended between ground and first floor levels of the buildings located inside the 2.74m AOD flood envelope to provide mitigation of the potential impact of a tidal defended, 1 in 200 (0.5%) flood event.

Flood Plain Compensation

- 4.2.16 If the ground level is raised within the floor zones, fluvial and tidal, it may be necessary to compensate for loss of floodplain volume. The requirement for volume compensation would be assessed at detailed design and a level for level volume compensation scheme would be proposed for approval by the Environment Agency.

Safe Access and Exit

- 4.2.17 With reference to the topographic survey included in Appendix B all areas of the site, apart from the north east corner adjacent to the watercourse, are located well above the modelled 0.5% (2110) flood level, 2.740m AOD. This includes the existing access road. This access road and the future adjacent road needs to be built above the design flood level to ensure a safe access and egress. Safe access and egress would be available to the Flood Zone 1, within the site, to the north east in the event of flooding.
- 4.2.18 A flood alert system is operated by the Environment Agency in Rustington. The development would be registered with the system and residents signed up to the flood warning alarm system. Information on the flood warning system should be provided in residents welcome packs.

Flood Resilience

4.2.19 Flood resilient construction is proposed at ground floor level up to first floor level for all dwellings located inside the 2.74m AOD flood envelope.

Advice for the provision of flood resilient construction is provided in the publication 'Improving the Flood Performance of New Buildings – Flood Resilient Construction' (2007) published by CIRIA. The construction and choice of materials would depend on the type of structure and external appearance and internal finishes required. General recommendations are summarised below with development specific comments made where applicable.

Table 1: Summary of general flood resilient construction recommendations (See 'Improving the Flood Performance of New Buildings – Flood Resilient Construction' (2007) published by CIRIA.

Element	Location	Material/Treatment
<u>Foundations</u>	Reinforced Concrete	Piled foundations with reinforced concrete ground beams shall be provided. These have low permeability and there will be no exposed steel reinforcement.
<u>Floors</u>	General	- Good compaction of hardcore and binding is required - Damp proof membranes should be included in the design - Suitable floor finishes include ceramic or concrete based floor tiles, stone and sand/ cement screeds.
	Suspended to be provided	- Drainage trench to be provided below floor - Cheaper, sacrificial finishes should be used - Steel reinforcement of concrete beams should be assessed following repeated or prolonged flooding
	Insulation	Floor insulation shall be non-absorbent to minimise the impact of flood water
	Services	Underfloor services using ferrous materials should be avoided.
<u>External Walls</u>	Outside face	- Dense materials to limit water absorption with good drying ability and good retention of pre-flood dimensions and integrity - Water resistant coatings

Element	Location	Material/Treatment
	Inside face	- Water resistant render - Ceramic Tiles (Kitchen, cloakrooms)
	Insulation	Cavity insulation shall incorporate non-absorbent to minimise impact of water
<u>Internal Walls</u>	Masonry	- Dense materials to limit water absorption with good drying ability and good retention of pre-flood dimensions and integrity - Water resistant coatings
	Plasterboard	- Use standard gypsum plasterboard up to the predicted flood level (+50mm) as a sacrificial material - Fix horizontally to limit extent of potential replacement
<u>Doors and Windows</u>	Doors	- The threshold should be raised as high as possible while complying with regulations. - Sealed external framed doors should be used.
	Windows/ patio doors	Adequate sealing of any windows or door sills to the fabric of the house.
<u>Fittings</u>	Storage	- Water resistant units at a high level - Easily cleanable units
	Appliances	- Place as high as practical above the floor level - Allow for effective drainage and cleaning behind kitchen units
<u>Services</u>	Pipework	Closed cell insulation should be used for pipes which are below the predicted floor level
	Drainage Services	Non-return valves are recommended to prevent blow back of diluted sewage in situations where there is a risk of the foul sewer surcharging. This is unlikely to be a risk.
	Water, electricity and gas meters	Locate above the predicted flood level

Element	Location	Material/Treatment
	Electrical services	• Locate sockets on the ground floor above the flood level • Electric ring mains should be installed at first floor level with drops to ground floor sockets and switches. A plastic cable conduit should be used.
	Heating Systems	• Boiler units and ancillary devices should be installed above predicted flood level and preferably on the first floor. • Underfloor heating should be avoided.

Historic Flood Events

- 4.2.20 The Environmental Agency report indicates than the site has not been affected by any recorded flood incidents

4.3 Groundwater

- 4.3.1 Reference is made to the Arun District Council Strategic Flood Risk Assessment (2016). It states that the majority of the bedrock in the district comprise layers of rock or drift deposits with high permeability, with the ability to hold high levels of water storage. This is likely to result in susceptibility of the district to groundwater emergence and flooding when the water table rises.
- 4.3.2 A map has been included in that document showing the proportion of each 1km grid square, where geological and hydrogeological conditions indicate that groundwater might emerge. According to this map the site is located in an area with potential for elevated groundwater to rise sufficiently to interact with the ground surface or with a susceptibility higher than 75%.

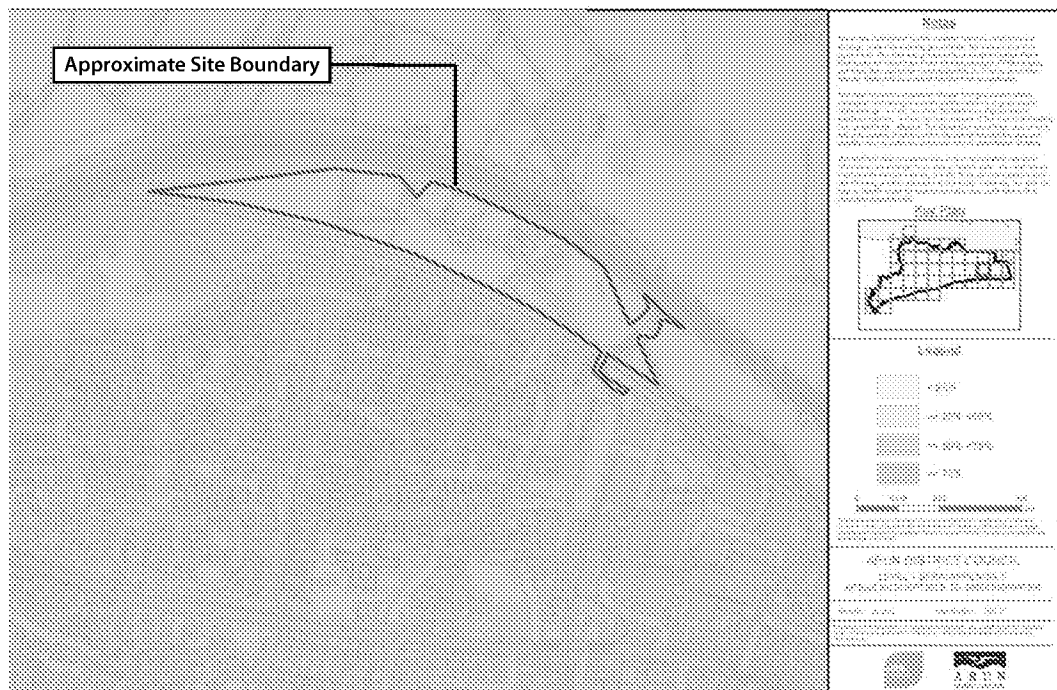


Figure 5: Map showing areas susceptible to groundwater - taken from the Arun District Council Strategic Flood Risk Assessment (2016)

- 4.3.3 It also states that this data should not be used as sole evidence for any specific flood risk management, land use planning or other decisions at any scale. It should be noted that although an area may be designated as susceptible to groundwater flooding, this does not mean that groundwater flooding will definitely be a problem within these areas, rather it provides an indication of potential risk.

- 4.3.4 Groundwater flooding has a very different flood mechanism to any other and for this reason many conventional flood defence and mitigation methods are not suitable. The only way to fully reduce flood risk would be through building design (development form), ensuring floor levels are raised above the water levels caused by a 1 in 100-year plus climate change event.
- 4.3.5 Appendix H from Arun District Council Strategic Flood Risk Assessment (2016) shows an historic flooding map with the recorded incidents provided by Arun District Council, West Sussex County Council, Southern Water and Environment Agency. These records do not show any historical incidents of groundwater flooding close to the site.
- 4.3.6 No basement constructions are proposed. It is considered that the finished floor level will be well above groundwater levels. A site investigation needs to be carried out to measure the groundwater depths within the site and confirm that the water table does not represent a flood risk.
- 4.3.7 The risk of flooding, from this source, to the proposed development is initially assessed as being low. If flooding due to groundwater did occur in the area it is likely to occur in lower, less vulnerable, parts of the site and flow from the site to the watercourse. A land drainage system may be considered should the results of further ground investigations indicate a high water table level and variation in level. This system would intercept ground water before it emerged at the surface and provide discharge to the nearby watercourse.

4.4 Flooding from Sewers and Drainage

- 4.4.1 No detailed information is currently available regarding existing onsite drainage. It is recommended that a drainage survey is undertaken to assess the condition of any onsite drainage and any defects repaired prior to connecting drainage from the proposed development.
- 4.4.2 Reference has been made to the Arun District Council Strategic Flood Risk Assessment (2016). No historical flooding from public sewers is recorded.
- 4.4.3 In the event of flooding from sewers and drainage occurring, flows would follow the topography away from the site towards surrounding watercourse. The risk of flooding from this source is initially assessed as being low.

4.5 Overland Flows

- 4.5.1 Flooding from the land would be caused by the slope of the site and any 'upstream' land that may cause overland flows during periods of heavy rainfall.
- 4.5.2 The Environmental Agency has an online interactive map which shows the risk of flooding from surface water – see Figure 6
- 4.5.3 This map shows that the existing and proposed development is located in an area that is defined as having a low and a very low risk of flooding from surface water. This low risk definition means that each year the site has a chance of flooding from surface water of between 1 in 1000 (0.1%) and 1 in 100 (1%).

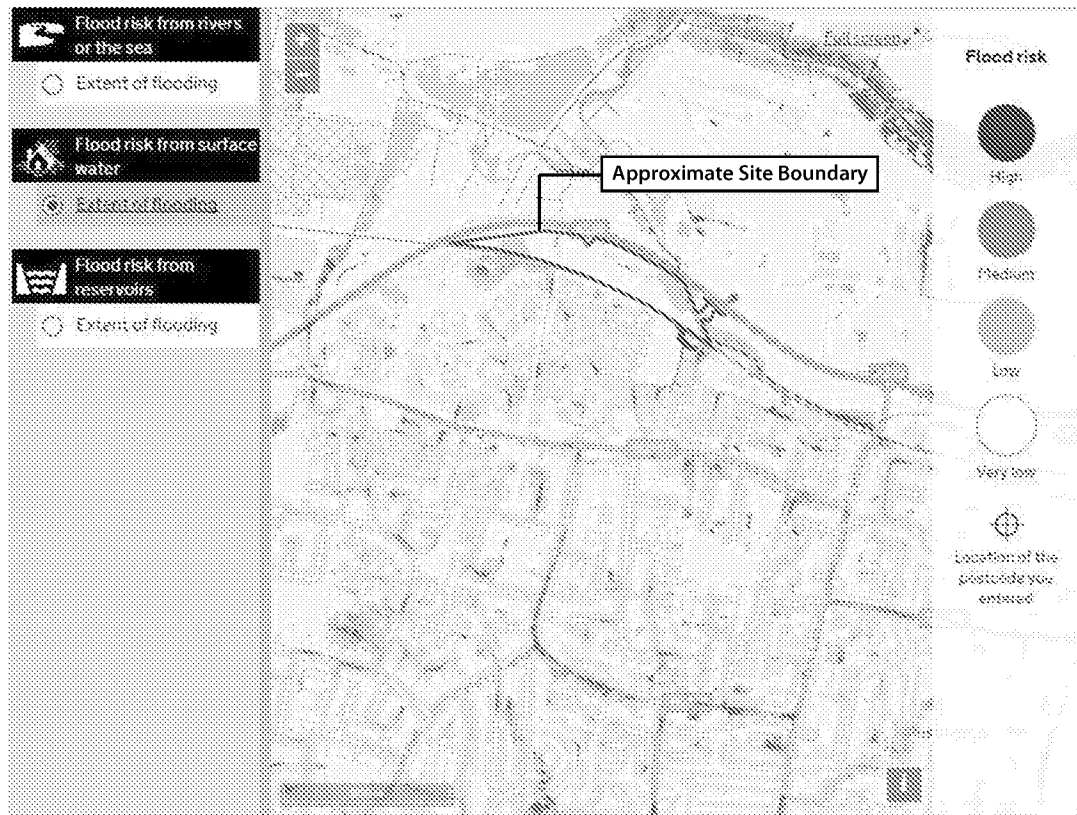


Figure 6: Environment Agency Map - Risk of flooding from surface water

- 4.5.4 Reference is also made to the Arun District Council Strategic Flood Risk Assessment (2016). A map has been included in the document showing the flooding that takes place from the 'surface runoff' generated by rainwater. As shown in Figure 7 the site is located in an area where some flooding incidents are known to occur. Most of the flooding is produced by the 1 in 1000 year storm and is located on proposed landscape areas. The areas currently shown green on figure 7 are small areas of 1 in 30 year storm flooding. These are located in current low points on the existing site but will not occur on the new layout as these areas will be raised in level as part of the development.

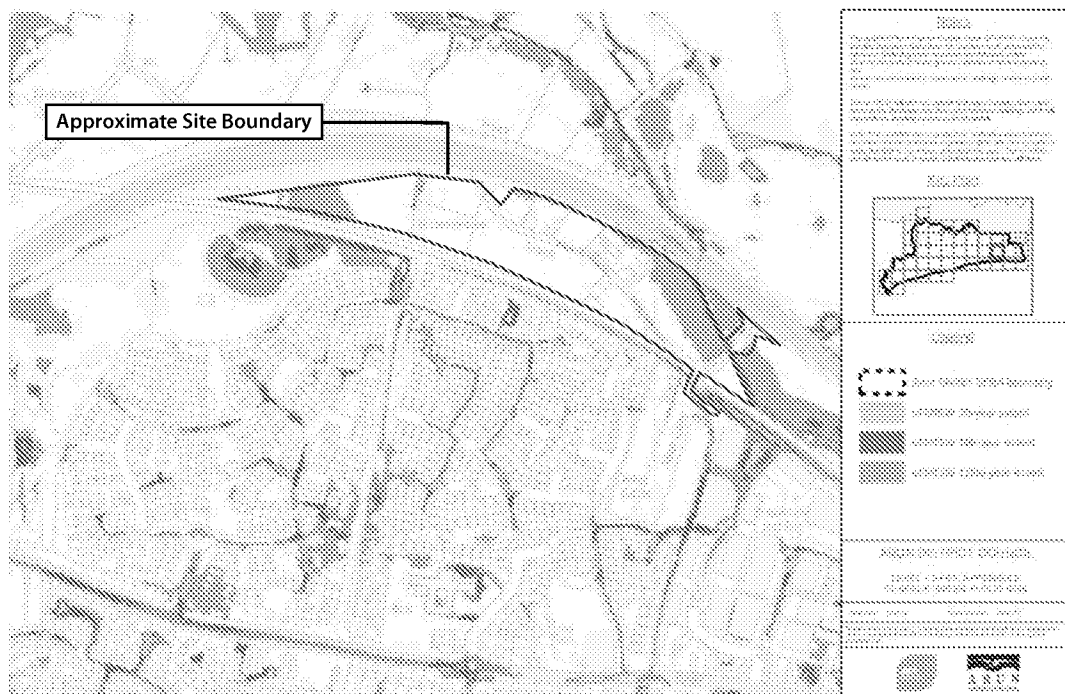


Figure 7: Surface Water Flood Risk from the Arun District Council Strategic Flood Risk Assessment (2016).

- 4.5.5 As discussed previously if there is flooding in the area, surface water from the site would follow the topography to lower, less vulnerable areas to the south east of the site and into the watercourse. The proposed and existing buildings are located outside of and above these areas. The access road is also located above and outside these areas. The risk of flooding from this source is considered to be low.

4.6 Flooding from Water Infrastructure

- 4.6.1 An interactive map is available on the Environment Agency website which indicates the maximum extent of flooding in the event of failure of a large reservoir. This map indicates that the site is outside the area that would be flooded in the event of such a failure – See Figure 8.

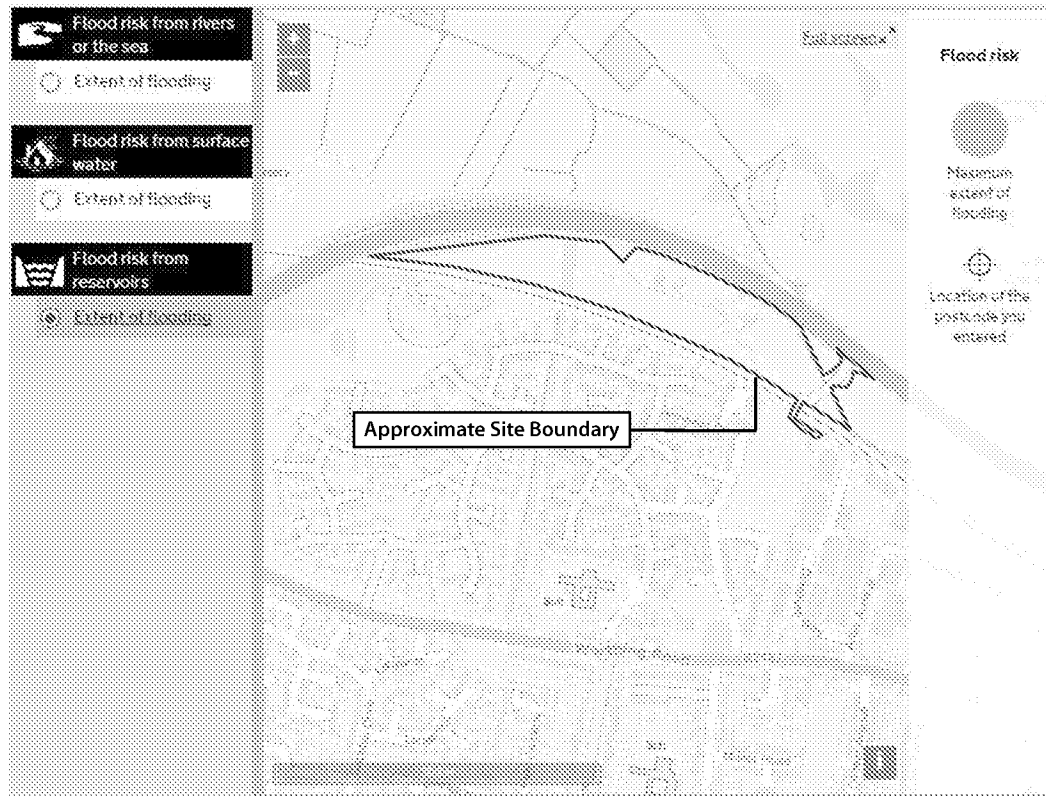


Figure 8: Environment Agency Interactive Flood Map showing Risk of Flooding from Reservoirs

- 4.6.2 Reference is made to the Arun District Council Strategic Flood Risk Assessment (2016). This states that the possible risk of failure of reservoirs is considered to be minimal. There are no large reservoirs within Arun District and the risk to development for reservoirs is residual. The risk of flooding from this source is considered to be low.

4.7 Flooding from Development Drainage

- 4.7.1 The proposed development will result in an increase of impermeable areas (See Section 2.2 and 2.8). It will therefore also result in an increase in peak surface water flow rate and volume and run-off. This will be attenuated with SuDS methods and run-off restricted to mitigate the increase in impermeable areas.
- 4.7.2 The risk of flooding from this source is assessed as low.

4.8 Summary of Flood Risk

- 4.8.1 An assessment of key sources of flooding has been carried out and is summarised below:

- Flooding from Rivers and the Sea Flood risk to be mitigated by minimum floor level of 3.040m AOD or minimum 2.740mAOD and the provision of flood resilient construction and residents signing up to Environment Agency's Flood Alert System.
- Flooding from Groundwater Low Risk – Mitigation Required – Land drainage system to discharge to watercourse.
- Flooding from Sewers and Drainage Low Risk
- Flooding from Overland Flows Low Risk
- Flooding from Artificial Sources Low Risk
- Flooding from Development Surface Water Drainage Low Risk

5 Drainage Strategy

5.1 Drainage Design

- 5.1.1 The management of the surface water run-off from the proposed development would comprise of the use of Sustainable Drainage Systems (SuDS).

5.2 Existing Greenfield Run-Off Rates

- 5.2.1 The existing greenfield run-off rates from the existing site have been calculated based on the proposed impermeable area of 1.24 ha and based on a 1, 30 and 100 year return period event. It should be noted that areas of public highway have been excluded from these calculation as they are served by a dedicated highway drainage system.
- 5.2.2 The calculation of the greenfield run-off has been carried out in accordance with the IH Report 124 'Flood estimation for small catchments' (Marshall and Bayliss, 1994) using Microdrainage WinDes software. The existing greenfield run-off rates calculations do not include an allowance for climate change. The greenfield run-off rates are shown below. The results of these calculations are included in Appendix F.

<u>Return Period</u>	<u>Greenfield Run-Off Rate</u>
QBar	4.4 l/s
1 in 1 year	3.7 l/s
1 in 30 year	9.9 l/s
1 in 100 year	13.9 l/s

5.3 Existing Volume of Run-off

- 5.3.1 The existing volume of run-off has been calculated based on the proposed impermeable area of 1.24 ha and based on the 1 in 100 year 6 hour event and does not include an allowance for climate change. The results of these calculations, which are included in Appendix F, are included below:

<u>Event</u>	<u>Volume of Run-off</u>
6 hour 1 in 100 year	286.990 m ³

5.4 Unmitigated Proposed Peak Surface Water Flows

5.4.1 The proposed development results in an increase in roof area and access area and hence an increase in total hardstanding area. The unmitigated proposed peak surface water flow from the site has been calculated based on this increase in impermeable area. The unmitigated proposed peak flow has been calculated for a 1, 30 and 100 year return period event of 15 minute duration and includes a 40% allowance for climate change. Calculations have been undertaken using the Modified Rational Method. The unmitigated peak flows for each of these storm events are shown below:

<u>Storm Event</u>	<u>Unmitigated Peak Flow</u>
Q_{p1+CC}	131.7 l/s
Q_{p30+CC}	322.6 l/s
$Q_{p100+CC}$	417.2 l/s

5.4.2 Due to the increase in impermeable area, and an allowance for climate change, the run-off from the site would be increased post development without any mitigation measures. Mitigation measures to reduce the run-off to greenfield rates are described in section 5.6. Again detailed calculations are provided in Appendix G.

5.5 Unmitigated volume of Run-Off

5.5.1 The unmitigated volume of run-off has been calculated based on the proposed impermeable area of 1.24 ha using the Modified Rational Method. This resulting volume of run-off, for which the calculation is included in Appendix G, has been calculated for the 1 in 100 year 6 hour storm event including a 30% allowance for climate change. The unmitigated volume of run-off is as follows:

<u>Event</u>	<u>Volume of Run-off</u>
6 hour 1 in 100 year (inc. 40% C.C.)	1063.4m ³

5.5.2 The additional volume of run – off is estimated as 780m³ and this would be disposed of by a combination of infiltration or storage in porous pavement and on site attenuation prior to discharge to the watercourse.

Mitigation measures to reduce the attenuate the volume of run-off are described in section 5.6.

5.6 Proposed Surface Water Drainage Strategy

- 5.6.1 The majority of the proposed development will be constructed over existing undeveloped area. The impermeable area thus will increase which will result in an increase of peak rate of surface water and volume of run-off from the development site without any further mitigation measures.
- 5.6.2 It is therefore proposed that the run-off from the proposed development will be limited to the greenfield run-off rates for all storm return periods up to a 1 in 100 year storm event plus an allowance of 40 % for climate change. The following SuDS measures have been considered for the development.

Attenuation of rain water in ponds and open water features

- 5.6.3 The Arun District Council Local Plan (2014) states in its Policy GEN9, that the Local Planning Authority will promote the use of balancing ponds for the attenuation of surface water run-off where this is required.
- 5.6.4 There are suitable areas for new open water features within the site located in Flood Zone 1 and outside the floodplain area. Attenuation of rain water in ponds and open water features will then be considered further. Groundwater monitoring, infiltration tests to BRE digest 365 standards and contamination testing is required to confirm the areas for which this would be possible within the site.

Infiltration

- 5.6.5 Infiltration techniques are used to discharge surface water from hardstanding areas into the ground.
- 5.6.6 Disposal of the surface water run-off to soakaways has been considered and were not considered suitable for the development site due to space constraints within the development site and possible high water tables. The arrangement of the proposed buildings means that minimum clearance distances of 5m between foundation structures/boundaries and soakaways would not be achievable. In addition it is likely that minimum clearance distances of 1 m between the ground water table and the bottom of the below ground infiltration structure is unlikely to be achievable.
- 5.6.7 Shallow infiltration measures such as permeable paving can allow the maintenance of the minimum clearance of 1 metre, with additional storage proposed for the impermeable areas. It is proposed that the houses fronting hard landscaped and parking areas will be constructed from permeable paving blocks overlaying a permeable sub-base with infiltration into the ground. Surface water falling on these areas will infiltrate into the ground reducing the run-off from the site. Groundwater monitoring, infiltration tests to BRE digest 365 standards and contamination testing is required to confirm the areas for which this would be possible within the site and an alternative drainage strategy comprising of a sealed storage sub-base and connected to the main site attenuation.
- 5.6.8 Permeable paving is designed to intercept surface water runoff and to provide a pollutant treatment prior to discharge into the ground. Permeable paving will limit the potential for deterioration in groundwater quality.

Attenuation of rain water through tanks or sealed water features

- 5.6.9 It is proposed that some areas could not be allowed to discharge to open features due to the ground level difference. It is therefore proposed that surface water run-off would be attenuated with controlled discharge to the existing watercourse. Surface water run-off from roofs and hardstanding area would be stored where possible in wet ponds which are proposed in the landscape layout and/or in underground storage. The controlled discharge to the ditch would be limited to greenfield run-off rates for all storm return periods up to and including the 1 in 100 year storm event including an allowance of 40 % for climate change.

Proposed design parameters for the surface water drainage system are:

- Controlled discharge rate of the existing watercourse:
Qbar: 4.4ls
- Estimated additional volume of run off to the disposed by a combination of porous paving and attenuation: 780m³

- 5.6.10 The overall storage volume required for the development site will be calculated during detailed design following soakage tests and groundwater monitoring.
- 5.6.11 Ponds and wetlands also provide pollutant treatment, e.g. through retaining suspended solids in sediments or uptaking nutrients by plants.
- 5.6.12 Consent from the relevant land drainage authority would be required to discharge surface water to the existing watercourse.

Conclusions

This Flood Risk Assessment has been undertaken for the proposed demolition of existing buildings on site and the erection of a mixed use development comprising residential units and care home (Use Class C2 and C3) and ancillary facilities including the railway crossing together with associated access, car parking and landscaping at the land west of Brook Lane and south of A259, Rustington, West Sussex, BN16 3JL. This assessment has been prepared in compliance with guidance given in the National Planning Policy Framework (NPPF) and Technical Guidance (March 2012).

The Environment Agency Flood Risk maps indicate that the proposed development site is partly situated in Flood Zone 1 and partly in Flood Zone 2 and 3. It is required that the Local Planning Authority apply the sequential test. In accordance with Table 2 and Table 3 of the NPPF the new development is considered as “More Vulnerable”. This type of construction is appropriate in Flood Zone 1 and 2 and the Exception Test is not required.

Environment Agency flood modelling for the tributary of the River Arun in the vicinity of the site has been obtained. The 0.5% (2110) modelled flood level for the site is 1.63m AOD and a minimum floor level of 1.93m AOD is recommended in accordance with the Environment Agency’s standing advice. It is also recommended that flood resilient construction up to first floor is provided for dwellings located inside the 2.740m AOD tidal flood envelope. Residents of the new development shall be signed up to the Environment Agency’s flood warning system for the tributary of the River Arun.

The risk of flooding from the different possible key sources has been assessed. This assessment has deemed that the risk of flooding from other sources at the site is low.

An initial assessment of the risk of flooding from the different possible key sources from the NPPF lists which could potentially affect the development site has been undertaken based on presently available information. According to the available information, this assessment has deemed that the risk of flooding from other sources at the site is low.

It is recommended that groundwater table level is investigation and a land drainage system installed if groundwater is found to be high or subject to high seasonal variation of level.

The proposals result in an increase of the impermeable areas and to mitigate the increase in surface water discharge rate and volume attenuation methods have been proposed. These measures would result in the peak surface water flows being limited to the greenfield run-off rates for all storm return periods up to a 1 in 100 year storm event plus an allowance of 40 % for climate change.

Shallow infiltration measures, such as permeable paving, are proposed to achieve these run-off rates. It is proposed that the houses fronting hard landscaped and parking areas will be constructed from permeable paving blocks overlaying a permeable sub-base with infiltration into the ground. Also Arun District Council seeks the implementation of ponds within developments where there are suitable areas. There are suitable areas for new open water features within the site located in Flood Zone one and outside the floodplain area. Attenuation of rain water in ponds and open water features will then be considered further.

Due to the ground water table permeable paving and the discharge of floors into the proposed pond will not be possible. In this instance, attenuation tanks need to be provided. The proposed attenuation volumes have been sized to adequately convey storm events up to and including the 100 year storm events including an allowance of 40% for climate change using Microdrainage Windes software. These calculations are included in Appendix F. The surface water drainage proposals have been provided in the schematic drainage layout drawing included in Appendix G.




NOTES

1. DO NOT SCALE THIS DRAWING.
WORK TO FIGURED DIMENSIONS ONLY.
ALL DIMENSIONS ARE IN MILLIMETRES (mm)
UNLESS NOTED OTHERWISE.
2. This drawing is to be read in conjunction with all relevant Architect's, Engineer's and Specialist's drawings and their respective Specifications.
3. All work to comply with the relevant British Standards, Codes of Practice and the Building Regulations.
4. Any discrepancies between all working drawings, specifications and schedules of all disciplines to be immediately notified to CTP for clarification/correction prior to construction of relevant structure.

KEY

	Total Site Area	59,211 m ²
	Existing Building Area	1,411 m ²
	Existing Hard Landscaping Area	1,029 m ²
	Existing Highway Area	1,841 m ²
	Existing Soft Landscaped Area	54,930 m ²

PRELIMINARY



1. **DO NOT SCALE THIS DRAWING.**
WORK TO FIGURED DIMENSIONS ONLY.
ALL DIMENSIONS ARE IN MILLIMETRES (mm)
UNLESS NOTED OTHERWISE.
2. This drawing is to be read in conjunction with all relevant Architect's, Engineer's and Specialist's drawings and their respective Specifications.
3. All work to comply with the relevant British Standards, Codes of Practice and the Building Regulations.
4. Any discrepancies between all working drawings, specifications and schedules of all disciplines to be immediately notified to CTP for clarification/correction prior to construction of relevant structure.

	Total Site Area	59,211 m²
	Proposed Soft Landscaping Area	39,297 m²
	Proposed Hard Landscaping Area	6,139 m²
	Proposed Building Roof Area	6,223 m²
	Proposed Public Highway Area	7,552 m²



10m 20m 30m 40m 50m 100m

SCALE 1:1000



Suffolk House 154 High Street
Surrey, Surrey SE8 6JF UK
UK +44 (0)1753 780166
Mobile: +009 2778 0051
www.cbs-ij.com

Brook Lane, Rustington
BN16 3JL

Proposed Area Plan

PRELIMINARY

```
P1 PRELIMINARY 23.02.2017 JGG MOM
=====
JGG Feb 2017 CIVIL
=====
1:1000 @A1
Unless Noted Otherwise
A3992-1501 - P1
```




Land west of Brook Lane and south of A259
(within the parishes of Brookfield & Angmering & Findon)
For Store Property Investments Ltd

INDICATIVE SITE LAYOUT



LAND AT BROOK LANE, RUSTINGTON - ILLUSTRATIVE PROPOSALS

Use of Environment Agency Information for Flood Risk Assessments

Important

If you have requested this information to help inform a development proposal, then we recommend that you undertake a formal pre-application enquiry using the form available from our website:-

<https://www.gov.uk/government/publications/pre-planning-application-enquiry-form-preliminary-opinion>

Depending on the enquiry, we may also provide advice on other issues related to our responsibilities including flooding, waste, land contamination, water quality, biodiversity, navigation, pollution, water resources, foul drainage or Environmental Impact Assessment.

You should refer to the Environment Agency's Flood Risk Standing Advice, Planning Practice Guidance, and the existing PPS25 Practice Guide for information about what flood risk assessment is needed for new development in the different Flood Zones. These documents can be accessed via:

<https://www.gov.uk/flood-risk-assessment-standing-advice>

<http://planningguidance.planningportal.gov.uk/>

<http://www.planningportal.gov.uk/planning/planningpolicyandlegislation/previousenglishpolicy/ppqpps/pps25>

You should also consult the Strategic Flood Risk Assessment produced by your local planning authority.

You should note that:

1. Information supplied by the Environment Agency may be used to assist in producing a Flood Risk Assessment (FRA) where one is required, but does not constitute such an assessment on its own.
2. This information covers flood risk from main rivers and the sea, and you will need to consider other potential sources of flooding, such as groundwater or overland runoff. The information produced by the local planning authority referred to above may assist here.
3. Where a planning application requires a FRA and this is not submitted or deficient, the Environment Agency may well raise an objection.
4. For more significant proposals in higher flood risk areas, we would be pleased to discuss details with you ahead of making any planning application, and you should also discuss the matter with your local planning authority.

Maria Orellana
CTP Consulting Engineers
Suffolk House
154 High Street
Sevenoaks
Kent
TN13 1XE

Our ref: SSD/37767

Date: 20/02/2017

Dear Maria

Provision of Product 4 for address: Brook Lane, Rustington, Littlehampton BN16 3JL

Thank you for your request of 9th February 2017 to use Environment Agency data, Product 4. The information is attached.

The information on Flood Zones in the area relating to this address is as follows:

The property is in an area located within Flood Zone 3 shown on our Flood Map for Planning (Rivers and Sea).

Note - This information relates to the area that the above named property is in and is not specific to the property itself.

Please find attached a copy of the Flood Map for Planning (Rivers and Sea) for the area relating to your address.

Further details about the Environment Agency information supplied can be found on the GOV.UK website:

<https://www.gov.uk/browse/environment-countryside/flooding-extreme-weather>

If you have requested this information to help inform a development proposal, then you should note the information on GOV.UK on the use of Environment Agency Information for Flood Risk Assessments

<https://www.gov.uk/planning-applications-assessing-flood-risk>

<https://www.gov.uk/government/publications/pre-planning-application-enquiry-form-preliminary-opinion>

Guildbourne House, Chatsworth Road, Worthing, West Sussex, BN11 1LD
Customer services line: 03708 506 506

Supporting Information

Flood Defences

As a result of the Littlehampton Arun East Bank Tidal Walls Flood Defence Scheme the flood defences on the East Bank of the River Arun in the town of Littlehampton have been raised to 4.8mAOD. These have been designed to reduce the risk of flooding to an estimated 0.33% (1in300yr) up to the year 2110. Further details available at

<http://www.environment-agency.gov.uk/homeandleisure/floods/114650.aspx>

Model Information

The flood outlines, depths and levels are taken from the Lower Tidal River Arun Strategy Study, completed in 2010 by Atkins.

Please note the defended scenarios include the beach profile and show flooding from wave overtopping of defences. The undefended scenarios do not include any wave overtopping. The calculations used to generate estimated wave overtopping volumes require defence crest, toe and profile information which are obviously not available for an undefended scenario. As such, you may see greater flood extents for the defended scenarios rather than the undefended.

Flood History

We do not have any records of previous flood events affecting this site. I would suggest contacting West Sussex County Council for a more comprehensive flood history check.

Please note our records are not comprehensive and may not include all events, you can contact your Local Authority to check if they hold any relevant information regarding your application.

You are encouraged to use and re-use this information freely and flexibly, with only a few conditions. Details of which can be found here:

<http://www.nationalarchives.gov.uk/doc/open-government-licence/version/3/>

We respond to requests for recorded information that we hold under the Freedom of Information Act 2000 (FOIA) and the associated Environmental Information Regulations 2004 (EIR).

If you are not satisfied with our response to your request for information you can contact us within 2 calendar months to ask for our decision to be reviewed.

If you have any queries or would like to discuss the content of this letter further please call us on [REDACTED]

Yours faithfully
Freddie Fielding
PSO West Sussex


Enc. Flood Map for Planning (Rivers and Sea) / Node point locations / Flood levels/depths / Modelled flood outlines / Flood Defence Locations

Flood Defence Locations. Centred BN16 3JL. Created 20/02/2017.

Legend

Defences

-  Embankment
-  Wall
-  Flood Gate
-  Demountable Defence
-  Bridge Abutment
-  High Ground
-  Beach
-  Barrier Beach
-  Promenade
-  Quay
-  Cliff
-  Dunes
-  Culvert

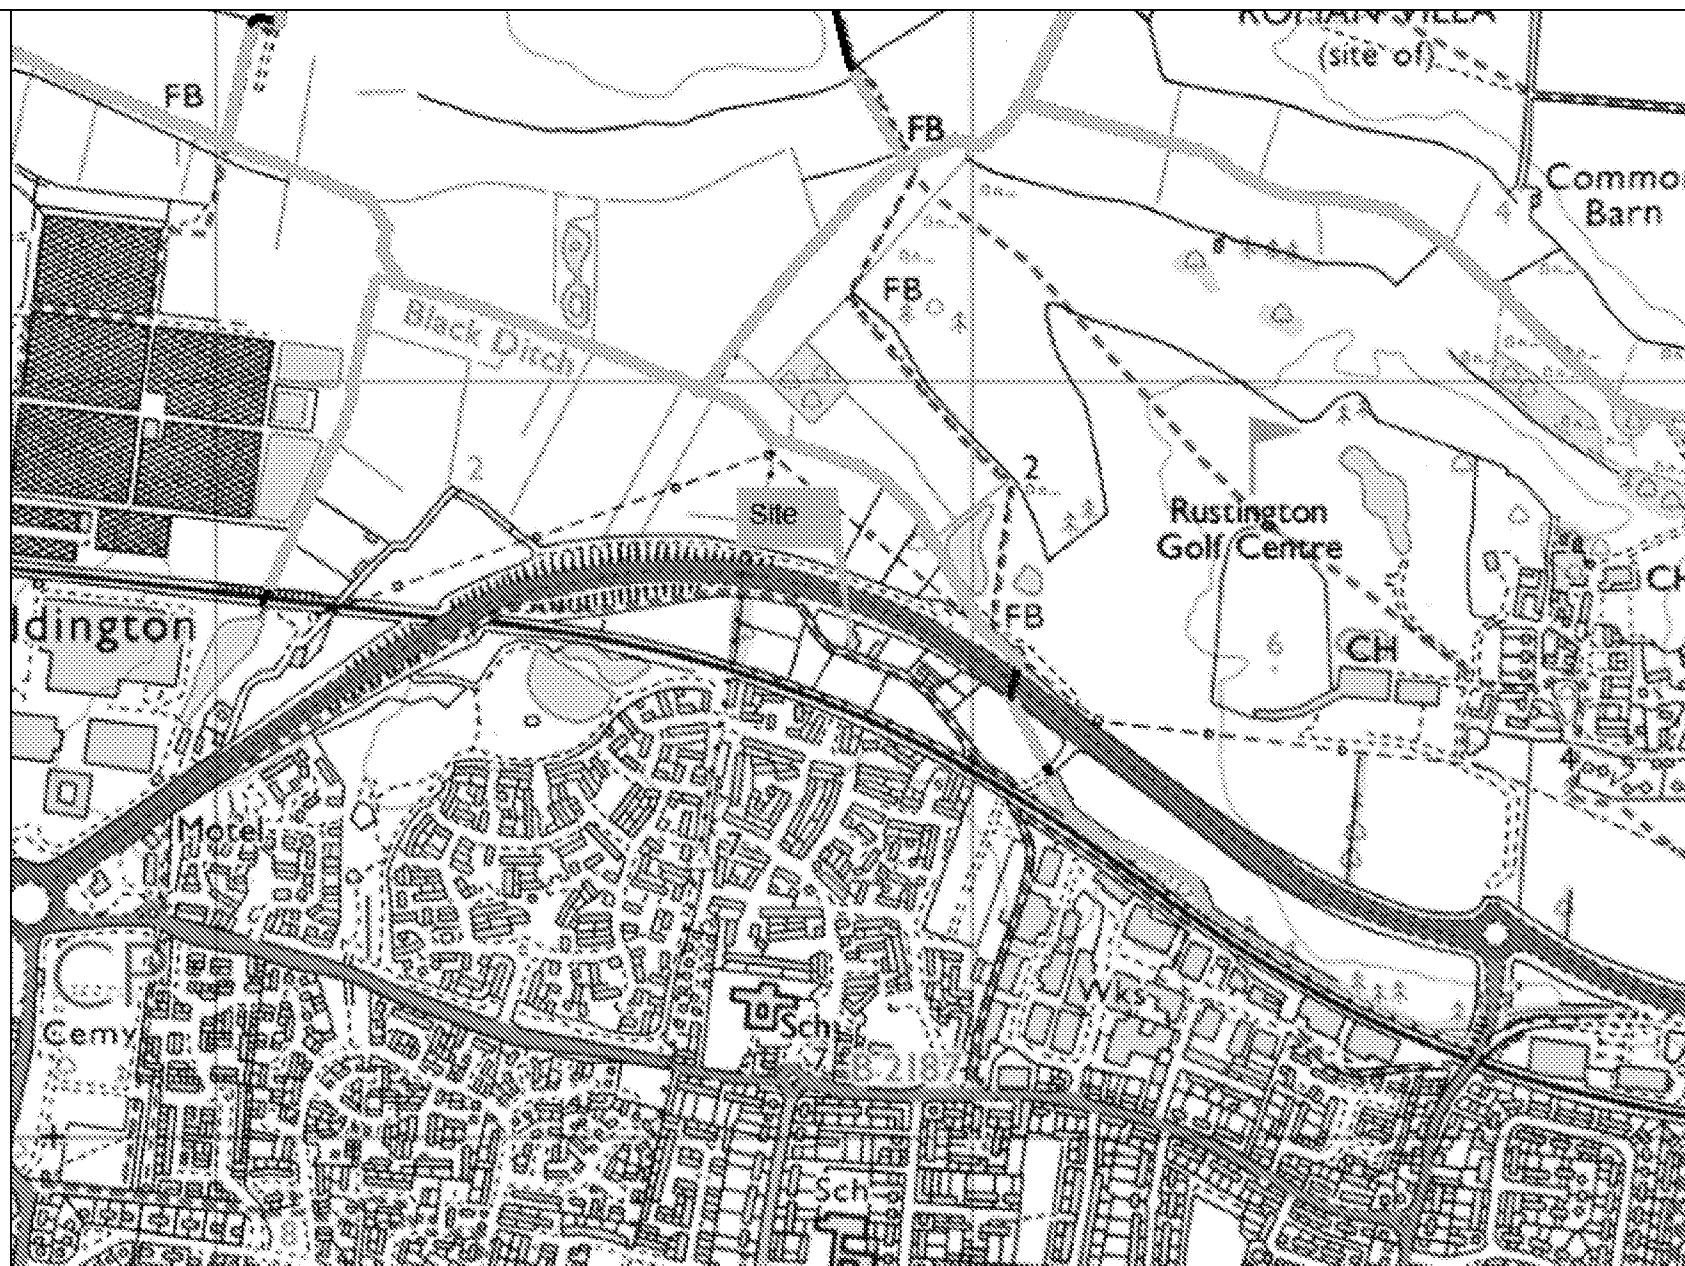

0 100 200 300
Metres



© Crown Copyright and database rights 2017 . Ordnance Survey 100024198.

Flood Map for Planning (Rivers and Sea). Centred BN16 3JL. Created 20/02/2017.



Scale 1: 10,000



Flood Map for Planning (Rivers & Sea)

- Defences
- Flood Storage Areas
- Areas benefiting from flood defences
- Flood Zone 3
- Flood Zone 2

Flood Map Areas (assuming no defences)

Flood Zone 3 shows the area that could be affected by flooding:

- from the sea with a 1 in 200 or greater chance of happening each year
- or from a river with a 1 in 100 or greater chance of happening each year.

Flood Zone 2 shows the extent of an extreme flood from rivers or the sea with up to a 1 in 1000 chance of occurring each year.

© Crown Copyright and database rights 2017. Ordnance Survey 100024198

Product 4 Flood Risk Data Requested by: Maria Orellana

Site: Brook Lane, Rustington, Littlehampton BN16 3JL

Table 1: Water Levels: Fluvial Undefended

Node Reference	NGR		Modelled Flood Levels in Metres			
	Eastings	Northings	Undefended Annual Exceedance Probability			
			5%	1%	1% Plus Climate Change	0.1%
1	504877	103622	-	-	-	-
2	504962	103593	-	-	-	-
3	505020	103564	-	-	1.63	-
4	505052	103508	-	-	-	-

Table 2: Water Levels: Fluvial Defended

Node Reference	NGR		Modelled Flood Levels in Metres					
	Eastings	Northings	Defended Annual Exceedance Probability					
			20%	5%	1.3%	1%	1% + CC	0.1%
1	504877	103622	-	-	-	-	-	-
2	504962	103593	-	-	-	-	-	-
3	505020	103564	-	-	-	-	-	-
4	505052	103508	-	-	-	-	-	-

Table 3: Water Levels: Tidal Undefended

Node Reference	NGR		Modelled Flood Levels in Metres			
	Eastings	Northings	Undefended Annual Exceedance Probability			
			5%	0.5%	0.5% (2110)	0.1%
1	504877	103622	-	-	-	-
2	504962	103593	-	-	-	-
3	505020	103564	-	-	1.96	-
4	505052	103508	-	-	1.96	-

Table 4: Water Levels: Tidal Defended

Node Reference	NGR		Modelled Flood Levels in Metres			
	Eastings	Northings	Defended Annual Exceedance Probability			
			5%	0.5%	0.5% (2110)	0.1%
1	504877	103622	-	-	-	-
2	504962	103593	-	-	2.74	-
3	505020	103564	-	-	2.74	-
4	505052	103508	-	-	2.74	-

Office Address: Guildbourne House, Chatsworth Road, Worthing BN11 1LD.
 Customer services line: 03708 506 506. Email: enquiries@environment-agency.gov.uk
www.gov.uk/government/organisations/environment-agency

Table 5: Water Depth: Fluvial Undefended

Node Reference	NGR		Modelled Flood Depth in Metres			
	Eastings	Northings	Undefended Annual Exceedance Probability			
			5%	1%	1% Plus Climate Change	0.1%
1	504877	103622	-	-	-	-
2	504962	103593	-	-	-	-
3	505020	103564	-	-	0.03	-
4	505052	103508	-	-	-	-

Table 6: Water Depth: Fluvial Defended

Node Reference	NGR		Modelled Flood Depth in Metres					
	Eastings	Northings	Defended Annual Exceedance Probability					
			20%	5%	1.3%	1%	1% + CC	0.1%
1	504877	103622	-	-	-	-	-	-
2	504962	103593	-	-	-	-	-	-
3	505020	103564	-	-	-	-	-	-
4	505052	103508	-	-	-	-	-	-

Table 7: Water Depth: Tidal Undefended

Node Reference	NGR		Modelled Flood Depth in Metres			
	Eastings	Northings	Undefended Annual Exceedance Probability			
			5%	0.5%	0.5% (2110)	0.1%
1	504877	103622	-	-	-	-
2	504962	103593	-	-	-	-
3	505020	103564	-	-	0.33	-
4	505052	103508	-	-	0.28	-

Table 8: Water Depth: Tidal Defended

Node Reference	NGR		Modelled Flood Depth in Metres			
	Eastings	Northings	Defended Annual Exceedance Probability			
			5%	0.5%	0.5% (2110)	0.1%
1	504877	103622	-	-	-	-
2	504962	103593	-	-	0.17	-
3	505020	103564	-	-	1.14	-
4	505052	103508	-	-	1.09	-

All levels taken from: Lower Tidal River Arun Strategy Study, completed in 2010 by Atkins.

There is no additional information or health warnings for these levels/depths or the model from which they have been produced.

Produced on 20/02/2017

Office Address: Guildbourne House, Chatsworth Road, Worthing BN11 1LD.
 Customer services line: 03708 506 506. Email: enquiries@environment-agency.gov.uk
www.gov.uk/government/organisations/environment-agency



Environment
Agency

N




Legend

- Site Boundary
- Main River
- 20% AEP (Defended Fluvial)
- 5% AEP (Defended Fluvial)
- 1.3% AEP (Defended Fluvial)
- 1% AEP (Defended Fluvial)
- 0.1% AEP (Defended Fluvial)
- 1% AEP Plus Climate Change (Defended Fluvial)

Scale: 1:10,000

00.1250.25

Kilometers

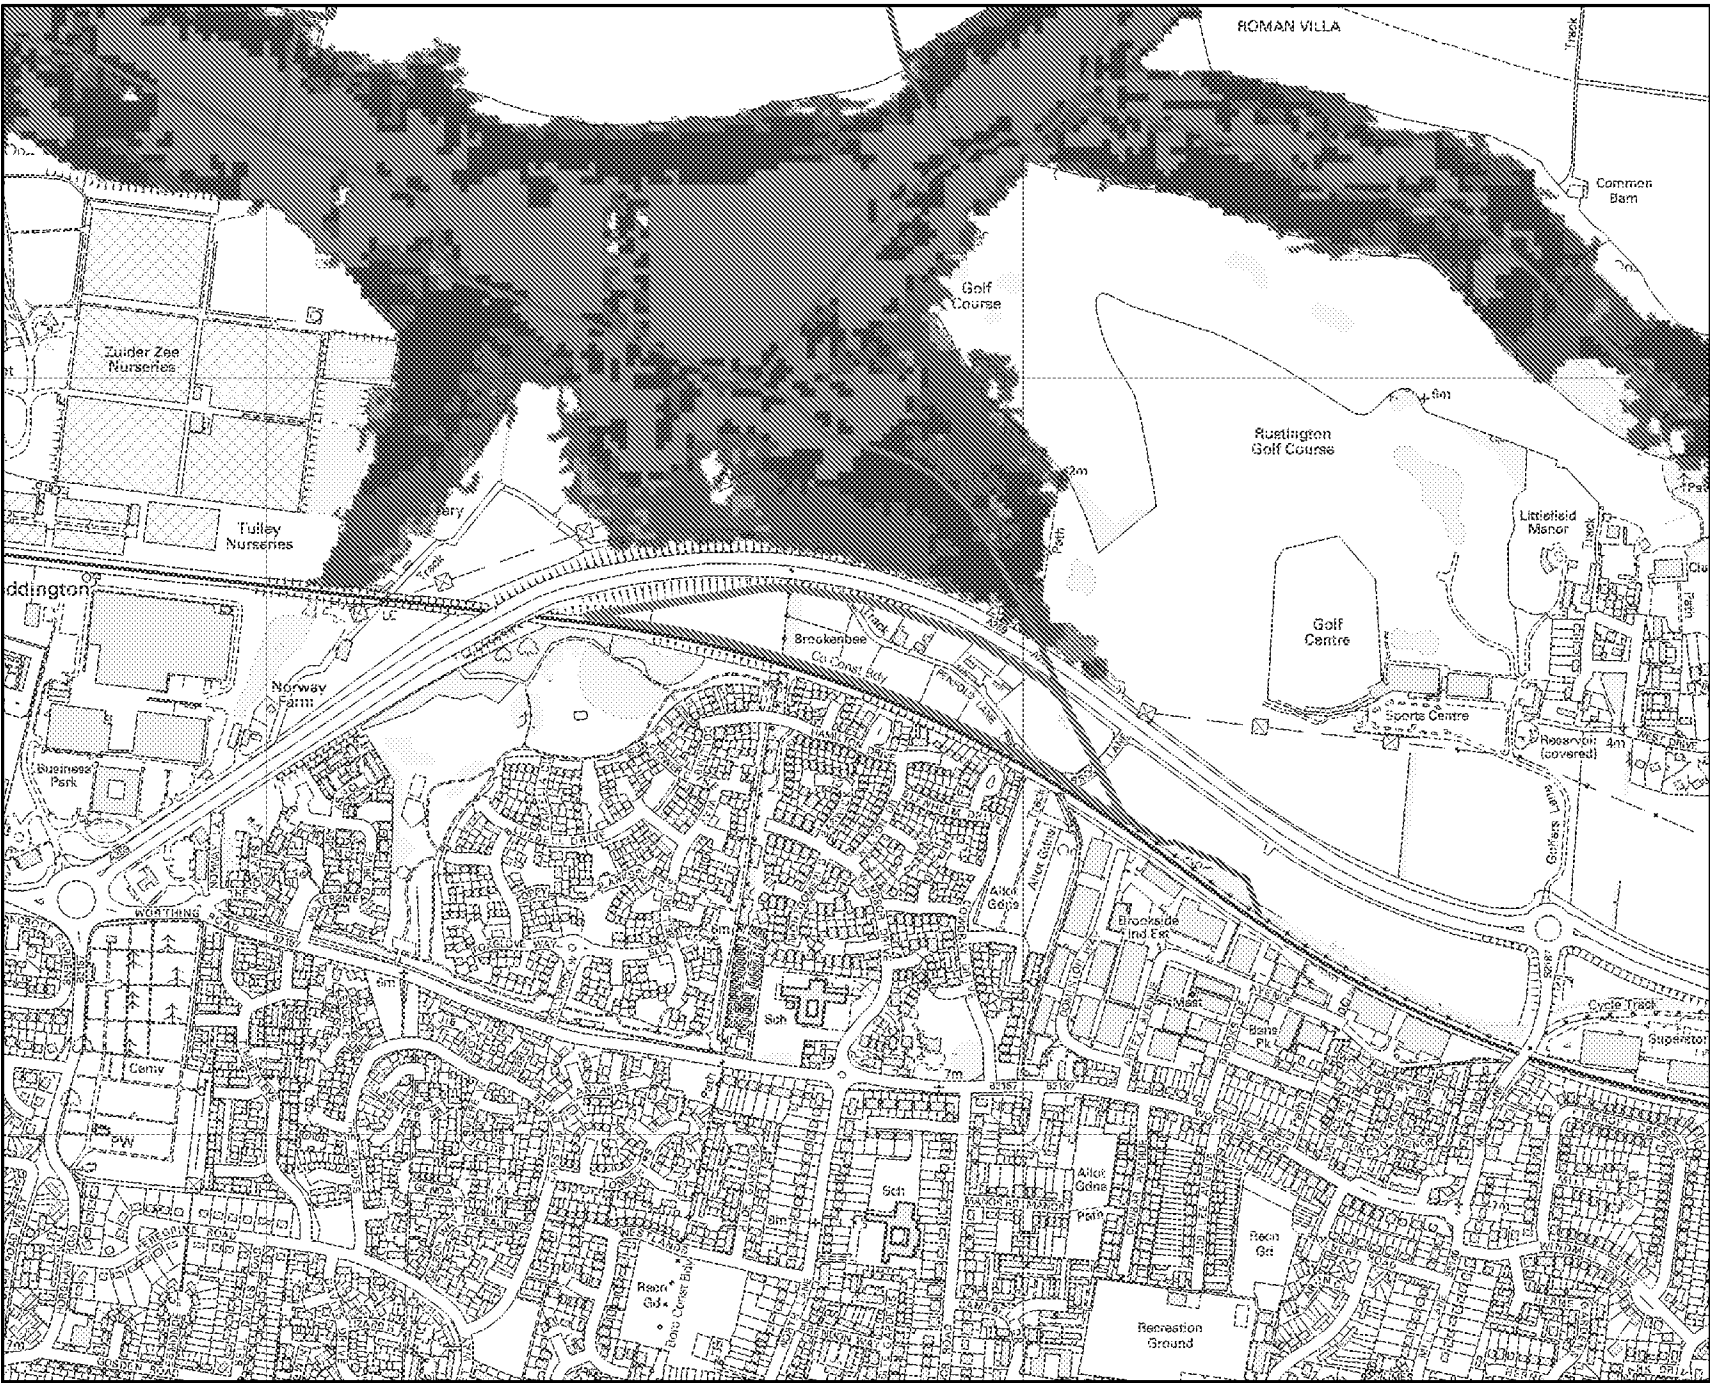



Environment
Agency

N



Legend


- Site Boundary
- Main River
- 5% AEP (Defended Tidal)
- 0.5% AEP (Defended Tidal)
- 0.1% AEP (Defended Tidal)
- 0.5% AEP (2110) (Defended Tidal)

Scale: 1:10,000

00.1250.25



Kilometers



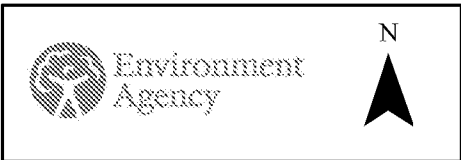

- Legend**
- Site Boundary
 - Main River
 - 5% AEP (Undefended Fluvial)
 - 1% AEP (Undefended Fluvial)
 - 0.1% AEP (Undefended Fluvial)
 - 1% AEP Plus Climate Change (Undefended Fluvial)

Scale: 1:10,000

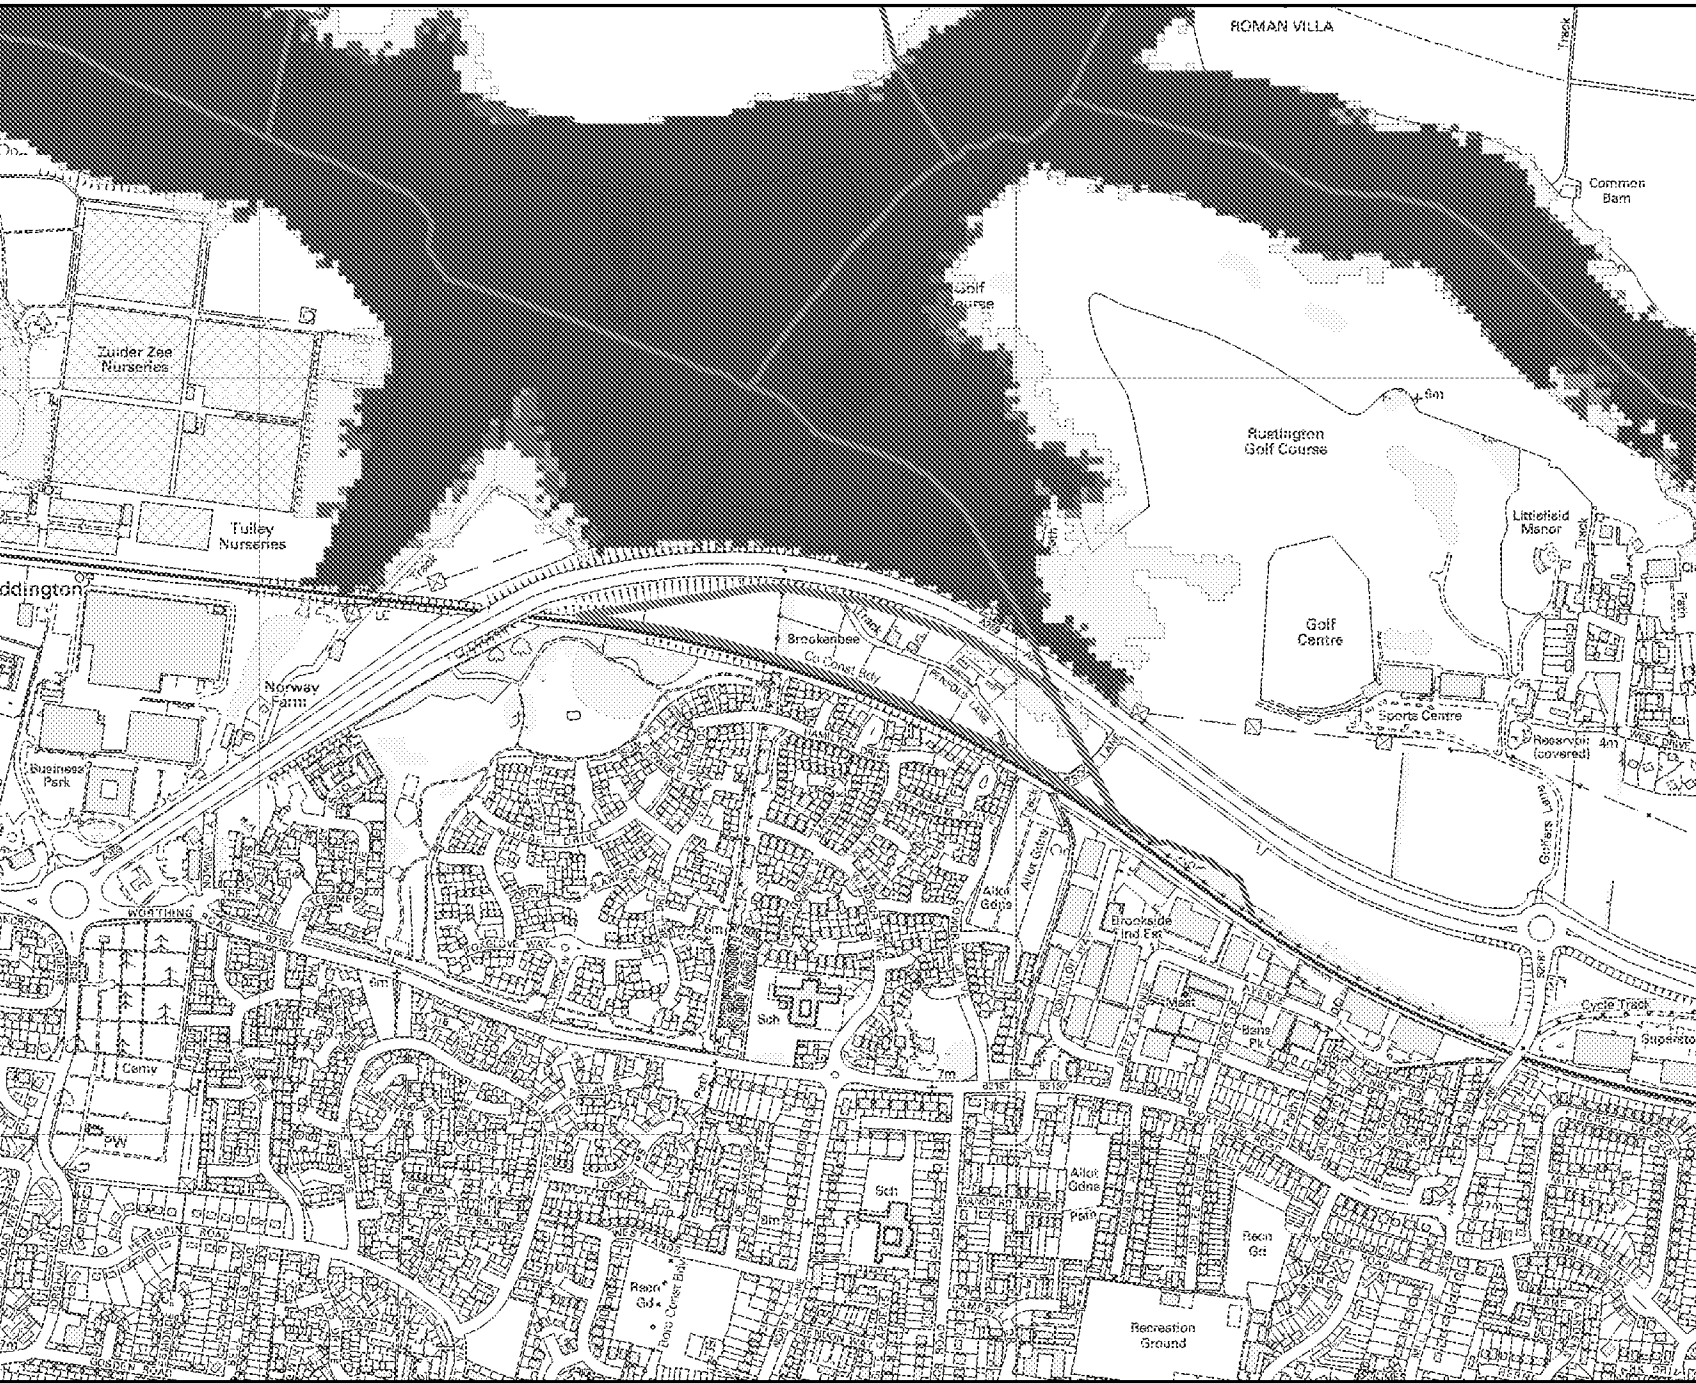



Environment
Agency


N



Legend

-  Site Boundary
-  Main River
-  5% AEP (Undefended Tidal)
-  0.5% AEP (Undefended Tidal)
-  0.1% AEP (Undefended Tidal)
-  0.5% AEP (2110) (Undefended Tidal)

Scale: 1:10,000





Environment
Agency


N




Legend

-  Site Nodes
-  Site Boundary
-  Main River

Scale: 1:4,000



0 0.05 0.1
Kilometers

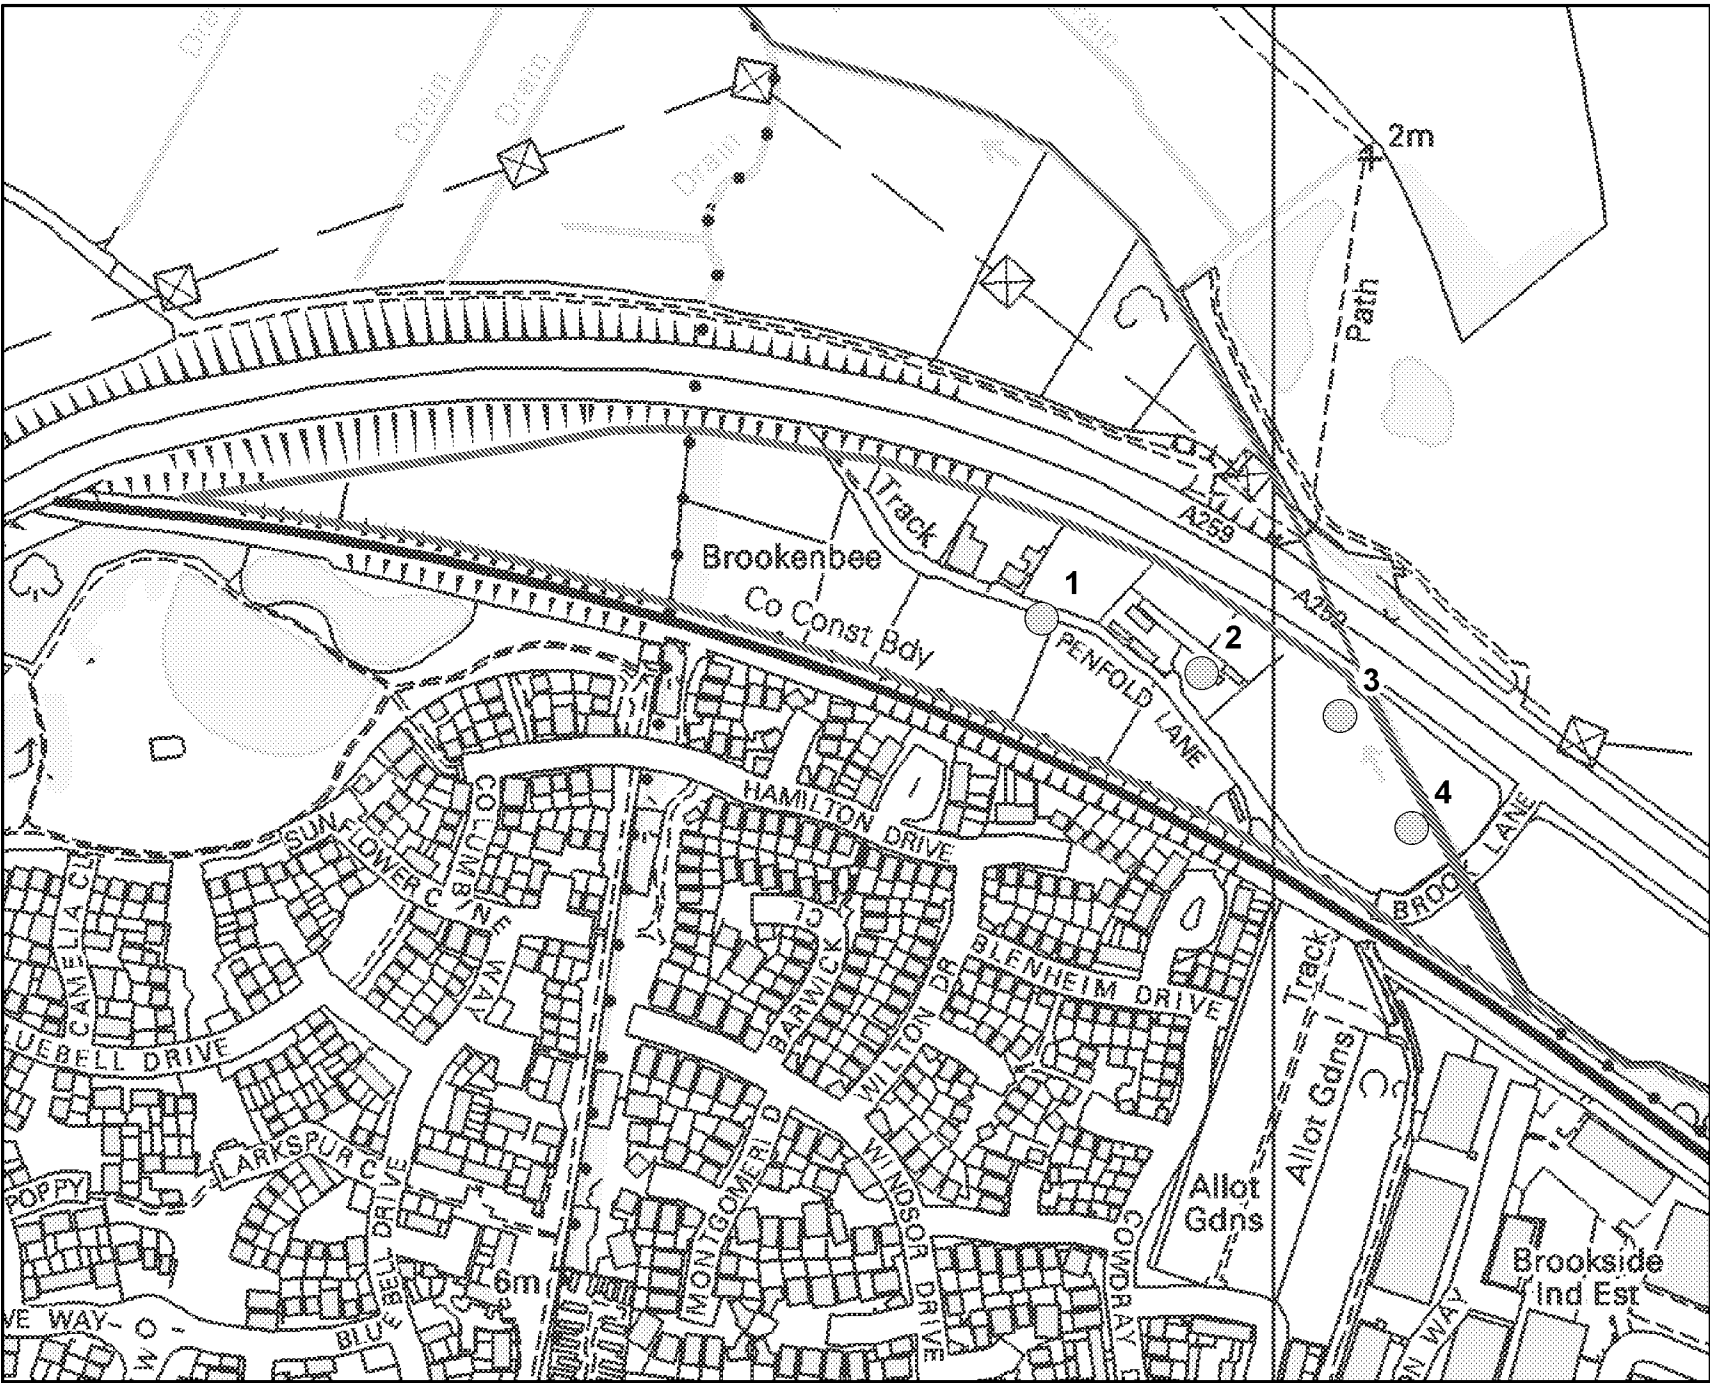

AUDITREPORT.TXT

Volumes of PGM2 model relative to PGM1 model

PGM1 (Existing) model:

N:\JOBS\A3750_A3999\A3992\CALCULATIONS\PDS\FINAL\PGM\EXISTING.DGM

PGM2 (Proposed) model: Datum plane at level: 2.740

Zones of PGM1 included in volume calcs:

All zones

Zones of PGM2 included in volume calcs:

All zones

Volumes were calculated within a digitised boundary

Areas and Perimeters of PGM1:

Zone No.	Surface Area (sq.m.)	Plan Area (sq.m.)	Perimeters Internal (m.)	Perimeters External (m.)
1 Zone 1	68090.0	67903.3	0.0	1713.3
Totals:	68090.0	67903.3		1713.3

Areas and Perimeters of PGM2:

Zone No.	Surface Area (sq.m.)	Plan Area (sq.m.)	Perimeters Internal (m.)	Perimeters External (m.)
1 Zone 1	252972.8	252972.8	0.0	2164.1
Totals:	252972.8	252972.8		2164.1

Total Plan and Surface Areas of Overlap between both PGM models:

	In Cut	In Fill	Balanced
Total Plan Area:	244.6	15065.8	0.0
Total Surface Area:	245.2	15113.5	0.0

Total of Cut and Fill Volumes listed by zones of PGM1:

Zone No.	Volumes		Nett Volumes	
	Cut (cu.m.)	Fill (cu.m.)	Cut (cu.m.)	Fill (cu.m.)
1 Zone 1	19.6	8580.8		8561.2
Total Volumes:	Gross: 19.6	8580.8		
	Nett: 8561.2			

AUDITREPORT.TXT

Note:

Volumes are of PGM2 surface relative to PGM1 formation

Summary of Total Volumes of Cut/Fill:

		PGM2 surface relative to PGM1 surface	
		Cut	Fill
Total	Gross:	19.6	8580.8
	Nett:		8561.2

- NOTES**
1. DO NOT SCALE THIS DRAWING.
WORK TO FIGURED DIMENSIONS ONLY.
ALL DIMENSIONS ARE IN MILLIMETRES (mm)
UNLESS NOTED OTHERWISE.
 2. This drawing is to be read in conjunction with all
relevant Architect's, Engineer's and Specialist's
drawings and their respective Specifications.
 3. All work to comply with the relevant British
Standards, Codes of Practice and the Building
Regulations.
 4. Any discrepancies between all working drawings,
specifications and schedules of all disciplines to be
immediately notified to CTP for clarification/correction
prior to construction of relevant structure.


KEY

----- Site Boundary

 **Model Flood Outline**
2.740m AOD, 0.5% AEP (2110)
Defended Tidal, Based on Environment
Agency Modelled Flood Levels

PRELIMINARY

P1	PRELIMINARY	09.03.2017	MOM
MOM	Feb 2017	CIVIL	
Drawing Number: A3991-1506			
1:1000@A1			Limit Total Overrun
P1			Drawn



ctp consulting
engineers

Suffolk House 154 High Street
Surrey Road, North 2140 122' UK
UK +44 (0)1752 740108
Mobile +060 37726 0501
www.ctp.co.uk

Brook Lane, Rustington
BN16 3JL

Modelled Flood Outline

A3991-1506

CTP Engineers		Page 1
Suffolk House 154 High Street Sevenoaks TN13 1XE	A3992 Brook Lane Rustington	
Date 22/02/2017 12:29 File	Designed by MOM Checked by	
XP Solutions Source Control 2016.1		

ICP SUDS Mean Annual Flood

Input

Return Period (years)	1	Soil	0.400
Area (ha)	1.800	Urban	0.000
SAAR (mm)	721	Region Number	Region 7

Results 1/s

QBAR Rural	6.3
QBAR Urban	6.3
Q1 year	5.4
Q1 year	5.4
Q30 years	14.4
Q100 years	20.2

©1982-2016 XP Solutions

CTP Engineers		Page 1
Suffolk House 154 High Street Sevenoaks TN13 1XE	A3992 Brook Lane Rustington	
Date 22/02/2017 12:26 File	Designed by MOM Checked by	
XP Solutions Source Control 2016.1		

Greenfield Runoff Volume

FSR Data

Return Period (years)	100
Storm Duration (mins)	360
Region	England and Wales
M5-60 (mm)	19.000
Ratio R	0.350
Areal Reduction Factor	1.00
Area (ha)	1.800
SAAR (mm)	721
CWI	107.710
Urban	0.000
SPR	37.000

Results

Percentage Runoff (%)	36.72
Greenfield Runoff Volume (m ³)	416.598

©1982-2016 XP Solutions

Title: Brook Lane, Rustington

Job No. A3992
By MOM
Date: 03.03.2017
Sheet No. 1 of 2



Suffolk House, 154 High St,
Sevenoaks, Kent, TN13 1XE
Telephone: 01732 740 195
Facsimile: 01732 740 662
www.ctp-llp.com

Description:
Estimate of unmitigated peak rate and volume of run-off
from proposed development
(Including allowance for climate change)

Ref:	Calculations	Output
	Proposed Development Proposed Development: Estimate of Surface Water Run-Off using the Modified Rational Method Catchment Area = 59210 m² Proposed Impermeable Area = 12360 m² <u>Average Rate of Rainfall:</u> Average rainfall values from Micro-Drainage using: FSR method where: M5-60(mm)= 19.000 R, ratio= 0.350 1 Year 15 Minute Event (M1-15D) = 28.1 mm/hr 30 Year 15 Minute Event (M30-15D)= 68.8 mm/hr 100 Year Event 15 Minute Event (M100-15D)= 89.0 mm/hr <u>Peak Rate of Run-Off (+ climate change allowance)</u> $Q_p = C \cdot A_p \cdot I$ (+30% allowance for climate change) , where $C = C_v \cdot C_r$ $C_v = 0.75$ (Volumetric run-off co-efficient) $C_r = 1.30$ (Routing co-efficient) Allowance for climate change 40% $Q_{p1+CC} = 131.7$ l/s $Q_{p30+CC} = 322.6$ l/s $Q_{p100+CC} = 417.2$ l/s	