
TYPICAL MANHOLE DETAIL - TYPE 2

Maximum depth from cover level soffit of pipe 3.0 m

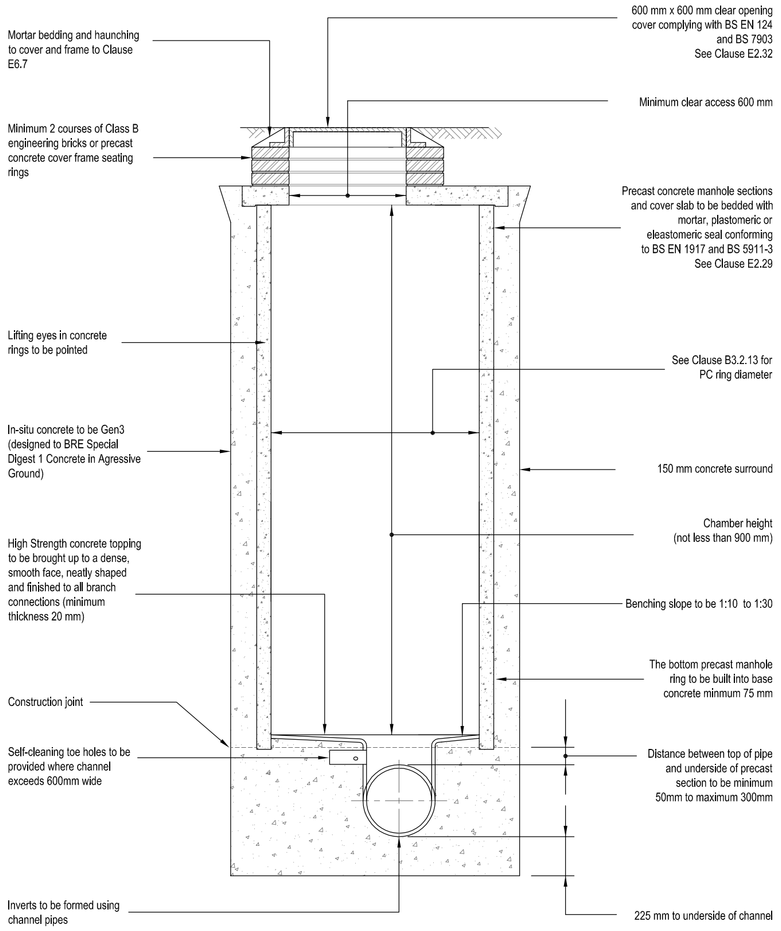


Manhole Details

TYPICAL OSMA INSPECTION CHAMBER DETAIL- TYPE 3

(Flexible material detail)


Maximum depth from cover to soffit level of pipe in areas subject to vehicle loading 3 m, non-entry

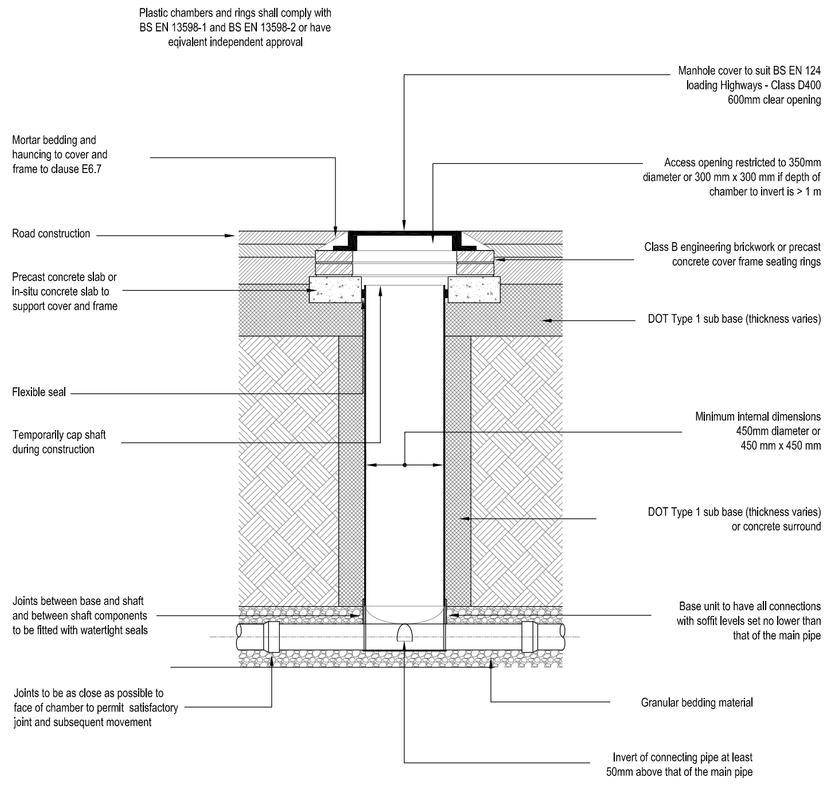


ALTERNATIVE TOP DETAILS FOR LIGHT VEHICLE LOADING AND LANDSCAPED AREAS - TYPE 3

Plastic chambers and rings shall comply with BS EN 13598-1 and BS EN 13598-2 or have eqivalent independent approval

Sited in domestic driveways or footways

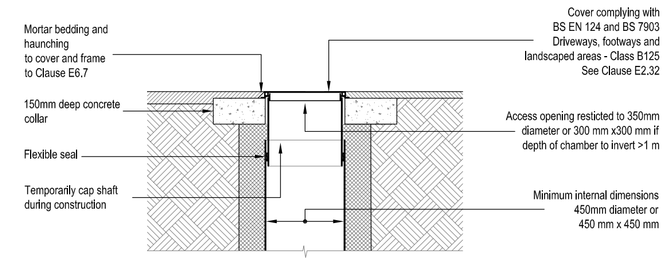

Sited in domestic gardens

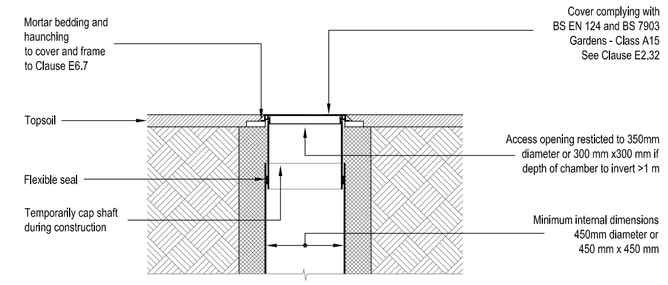


TYPICAL OSMA INSPECTION CHAMBER DETAIL - TYPE 4

(Flexible material construction)


Maximum depth from cover level to soffit of pipe 2 m, non entry

Plastic chambers and rings shall comply with BS EN 13598-1 and BS EN 13598-2 or have eqivalent independent approval

Sited in domestic driveways/paved areas

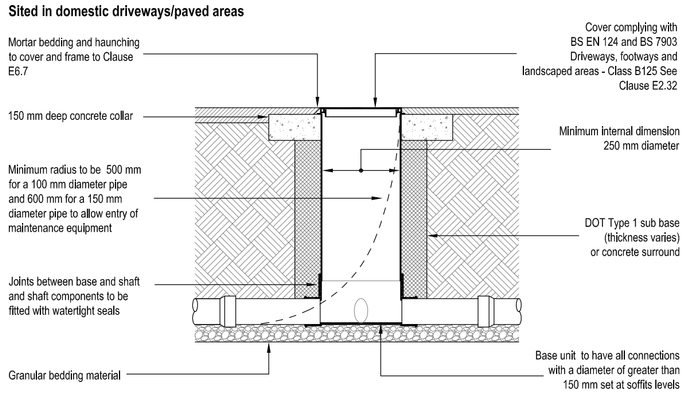

Sited in domestic gardens

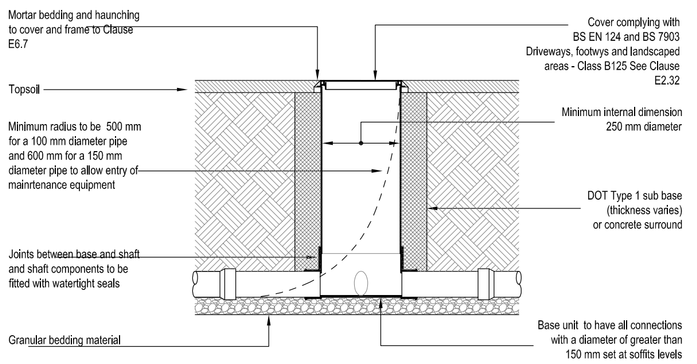


Inspection Chamber Details

TYPICAL OSMA CATCHPIT CHAMBER DETAIL - TYPE 5

(Flexible material construction)

Maximum depth from cover level to soffit of pipe 2 m, non entry

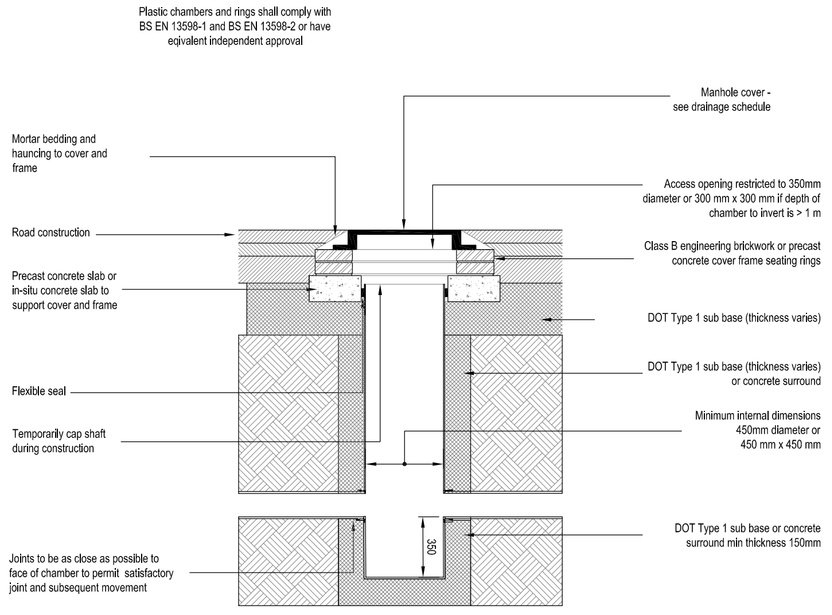

Catchpit Details

Rev.	Date	Details	Initials
A	12.03.21	First Issue	KN

Drawing Status: PRELIMINARY

Project: MAYFLOWER WAY ANGMERING

Client: ANGMERING COMMUNITY LAND TRUST

KAZYS NARBUTAS CONSULTING
Civil Engineering Consultant
Unit 5B, Tanners Court, Tanners Lane, East Wellow, Romsey, Hants. SO51 6DP
Telephone: 01794 322903 Email: kazys.n@knc.email

Drawing Title: Engineering Details
Standard Construction Details

Drawn	Checked	Scales	Paper Size	Date
KN		As Shown	A1	03.21
Job No.		Drawing No.		Revision
KNC2101		501-02		A

This drawing is the copyright of Kazys Narbutas Consulting and may not be copied, altered or reproduced in any form or passed to a third party without the consent of Kazys Narbutas Consulting. Do not scale from this drawing, use figured dimensions only.
Dimensions should be checked and verified on site and any discrepancies should be reported to Kazys Narbutas Consulting as soon as possible.

ARUN DISTRICT COUNCIL A/0503/20/DC