



## Panels

The Securifor 3D system is a complete system developed to combine high security and aesthetic design.

## Securifor® 3D

### Benefits

#### High security

The panels are heavy welded mesh with small rectangular apertures. Due to the large wire diameter (4 mm) and the restricted width of mesh (12,7 x 76,2 mm) Securifor 3D offers maximum security.

#### Attractive design

The horizontal bends make the Securifor 3D system ideally suitable for an environment where security and aesthetics go hand in hand.

#### Long lifetime

The coating technology of Betafence is state of the art and guarantees an extra high longevity.

#### Good viewing visibility


In spite of the small mesh aperture the see-through characteristics remain unimpaired when viewed head-on and even at an angle to the fence. This is particularly important for clear camera surveillance.

#### Complete system

The system includes panels with adapted posts and a specific fixing system.

## Applications

The Securifor 3D system is, thanks to the combination of an attractive design and a high security level, ideally suitable for application in schools, recreation, hospitals, railways, warehouses and commercial or industrial sites.

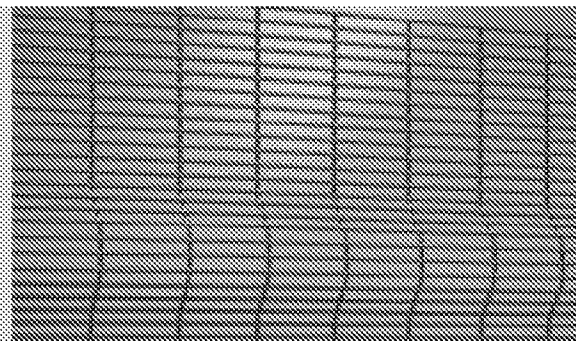

### Panela

The panels are heavy welded mesh, provided with horizontal reinforcements.

Width: 2518,6 mm.

Mesh sizes: 12,7 x 76,2 mm (H x W).

Wire diameter: 4 mm.

### Posts and fixing



Posts out of welded tube.

Profile intermediate- and end post: 80 x 60 x 2.50 mm.

Profile cornerpost: 80 x 60 x 2.50 mm.

The panels are fixed to the post by means of galvanised and green plastic coated fixing pieces and security bolts out of stainless steel M8.

### Coating technique

Panels made out of galvanised wires. An adhesion coating is given for a perfect adhesion with the polyester coating (min. 100 micron). The posts are in- and outside galvanised (min. coating 275g/m<sup>2</sup>, both sides together), in accordance with Euro norm 10326. Afterwards an adhesion coating is applied and finally the posts are plastic coated (min. 60 micron).

### Colours

Standard colour: green RAL 6005. Other colours: on request.

| ASSORTMENT SECURIFOR 3D |                      |                                       |                          |              |               |              |
|-------------------------|----------------------|---------------------------------------|--------------------------|--------------|---------------|--------------|
| Fence height<br>mm      | Panels               |                                       | Intermediate & end posts |              | Corner posts  |              |
|                         | Width x height<br>mm | Number of reinforcements<br>per panel | Profile<br>mm            | Height<br>mm | Profile<br>mm | Height<br>mm |
| 2000                    | 2518,6 x 2010,6      | 2                                     | 80 x 60 x 2,5            | 2600         | 80 x 60 x 2,5 | 2600         |
| 2400                    | 2518,6 x 2417,0      | 3                                     | 80 x 60 x 2,5            | 3100         | 80 x 60 x 2,5 | 3100         |
| 3000                    | 2518,6 x 3001,2      | 3                                     | 80 x 60 x 2,5            | 3700         | 80 x 60 x 2,5 | 3700         |

