


Klargester Domestic and Domestic+ Pumping Stations




Our domestic pumping stations are ideal for homes or properties with up to 13 people.

Supplied with single or twin pumps, Klargester domestic pumping stations are suitable for sewage, surface water and effluent applications. They are also appropriate where 24 hour storage requirements need to be maintained.


Product Benefits

- Made with super-tough, low maintenance GRP and high quality polyethylene for guaranteed durability.
- Supplied with control panel with options for remote monitoring system.
- Designed with easy access features for maintenance.
- Choose from either 110mm or 160mm inlet connections.
- Lockable covers for optimum security.
- Quick connection outlet couplings.
- Reliable performing stainless steel submersible Grundfos pumps.




Typical Grundfos AP Pump

Domestic - GRP Construction

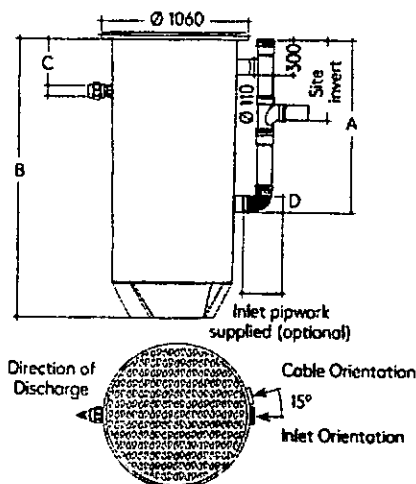

Domestic+ - Polyethylene Construction

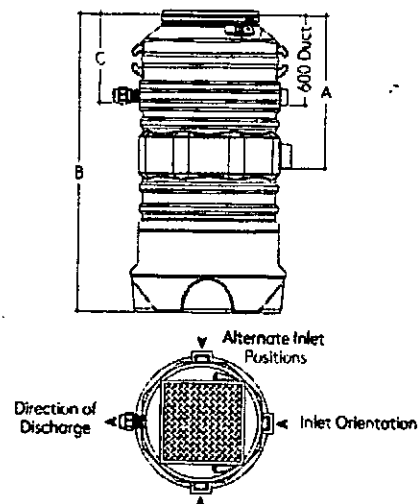

Technical Specification

Chamber Size	Capacity (Litres)	Pump Material	Alarm
900 x 2080	1,250	GRP	Optional
900 x 2580	1,600	GRP	Optional

Case Diameter (mm)	Outlet Invert (mm)	Chamber Inlet B		Inlet Invert A		Pump
		A (mm)	B (mm)	A (mm)	B (mm)	
Ø900	450	•	•	•	•	Ø110
		•	•	•	•	Ø160

Technical Specification

Chamber Size	Capacity (Litres)	Pump Material	Alarm
1000 x 2000	1450	Polyethylene	Standard
1000 x 2500	2200	Polyethylene	Standard

Case Diameter (mm)	Outlet Invert (mm)	Chamber Inlet B		Inlet Invert A		Pump
		A (mm)	B (mm)	A (mm)	B (mm)	
Ø1000	600	•	•	•	•	Ø110
		•	•	•	•	Ø160

Klargester Compact Pumping Stations




Our proven range of compact pumping stations can be used for effluent or sewage and are easy to install.

Klargester compact pumping stations provide the perfect solution for managing effluent or sewage, depending on the pump, distance and height.

Quick and easy to install and maintain the compact range is ideal for use in outbuildings, extensions, cellars, pool houses and external WC applications.


Product Benefits

- Non-return valves and outlet pipe compression coupling as standard.
- 3 pump options; effluent low head, effluent high head and sewage vortex.
- Service and maintenance plans available to prolong the life of the pump systems.
- Complete pre-fabricated solution ready for installation.
- Fully automatic.
- Robust, durable and corrosion free, stainless steel submersible Grundfos pumps.




Typical Grundfos Unilift

Mini Pump Chamber - 200 Litre

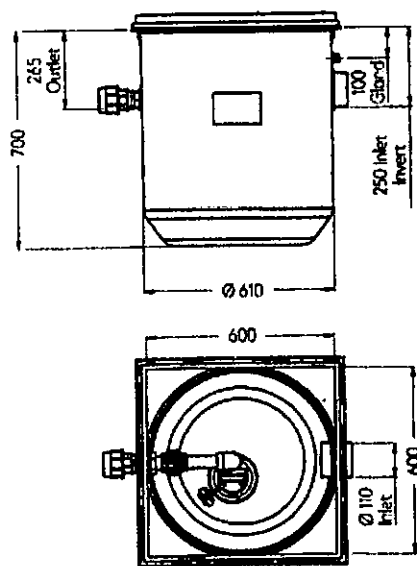

Mini Pump Chamber Assembly - 400 Litre

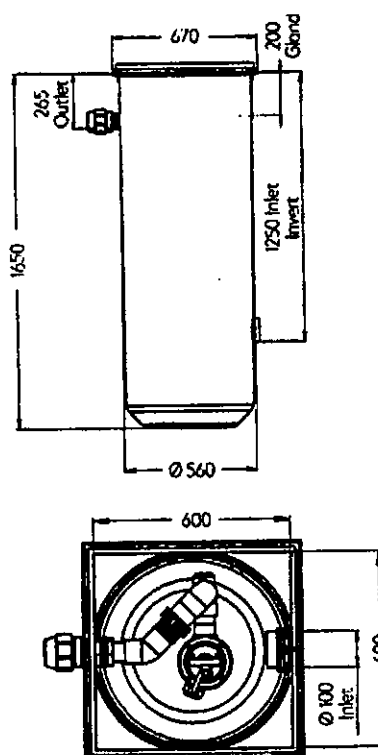

Technical Specification

Chamber Size (mm)	Capacity (litres)	Tank Material	Submersible Pump	Alarm	Pump type
610 x 700	200	GRP	N/A	Optional	Single

Technical Specification

Chamber Size (mm)	Capacity (litres)	Tank Material	Submersible Pump	Alarm	Pump type
560 x 1,650	400	GRP	N/A	Optional	Single