


POUND NURSERY, ROUNDSTONE ROAD, ANGMERING - S6	
-	 EXISTING COLUMN TO BE REMOVED
12	 PROPOSED 6 METRE NOMINAL HEIGHT TUBULAR STEEL LIGHTING COLUMN, COMPLETE WITH POST TOP MOUNTED LANTERN. [PHILIPS WRTL MINI LUMA WITH 12no. LED's PROVIDING NO LESS THAN 1.4klm WITH 5 DEGREE TILT]. COLUMN COLOUR: BS00E53 (BLACK) SWITCH REGIME: <u>MAYFLOWER EXTERNAL NODE</u> (OPTICAL SETTING: R5)

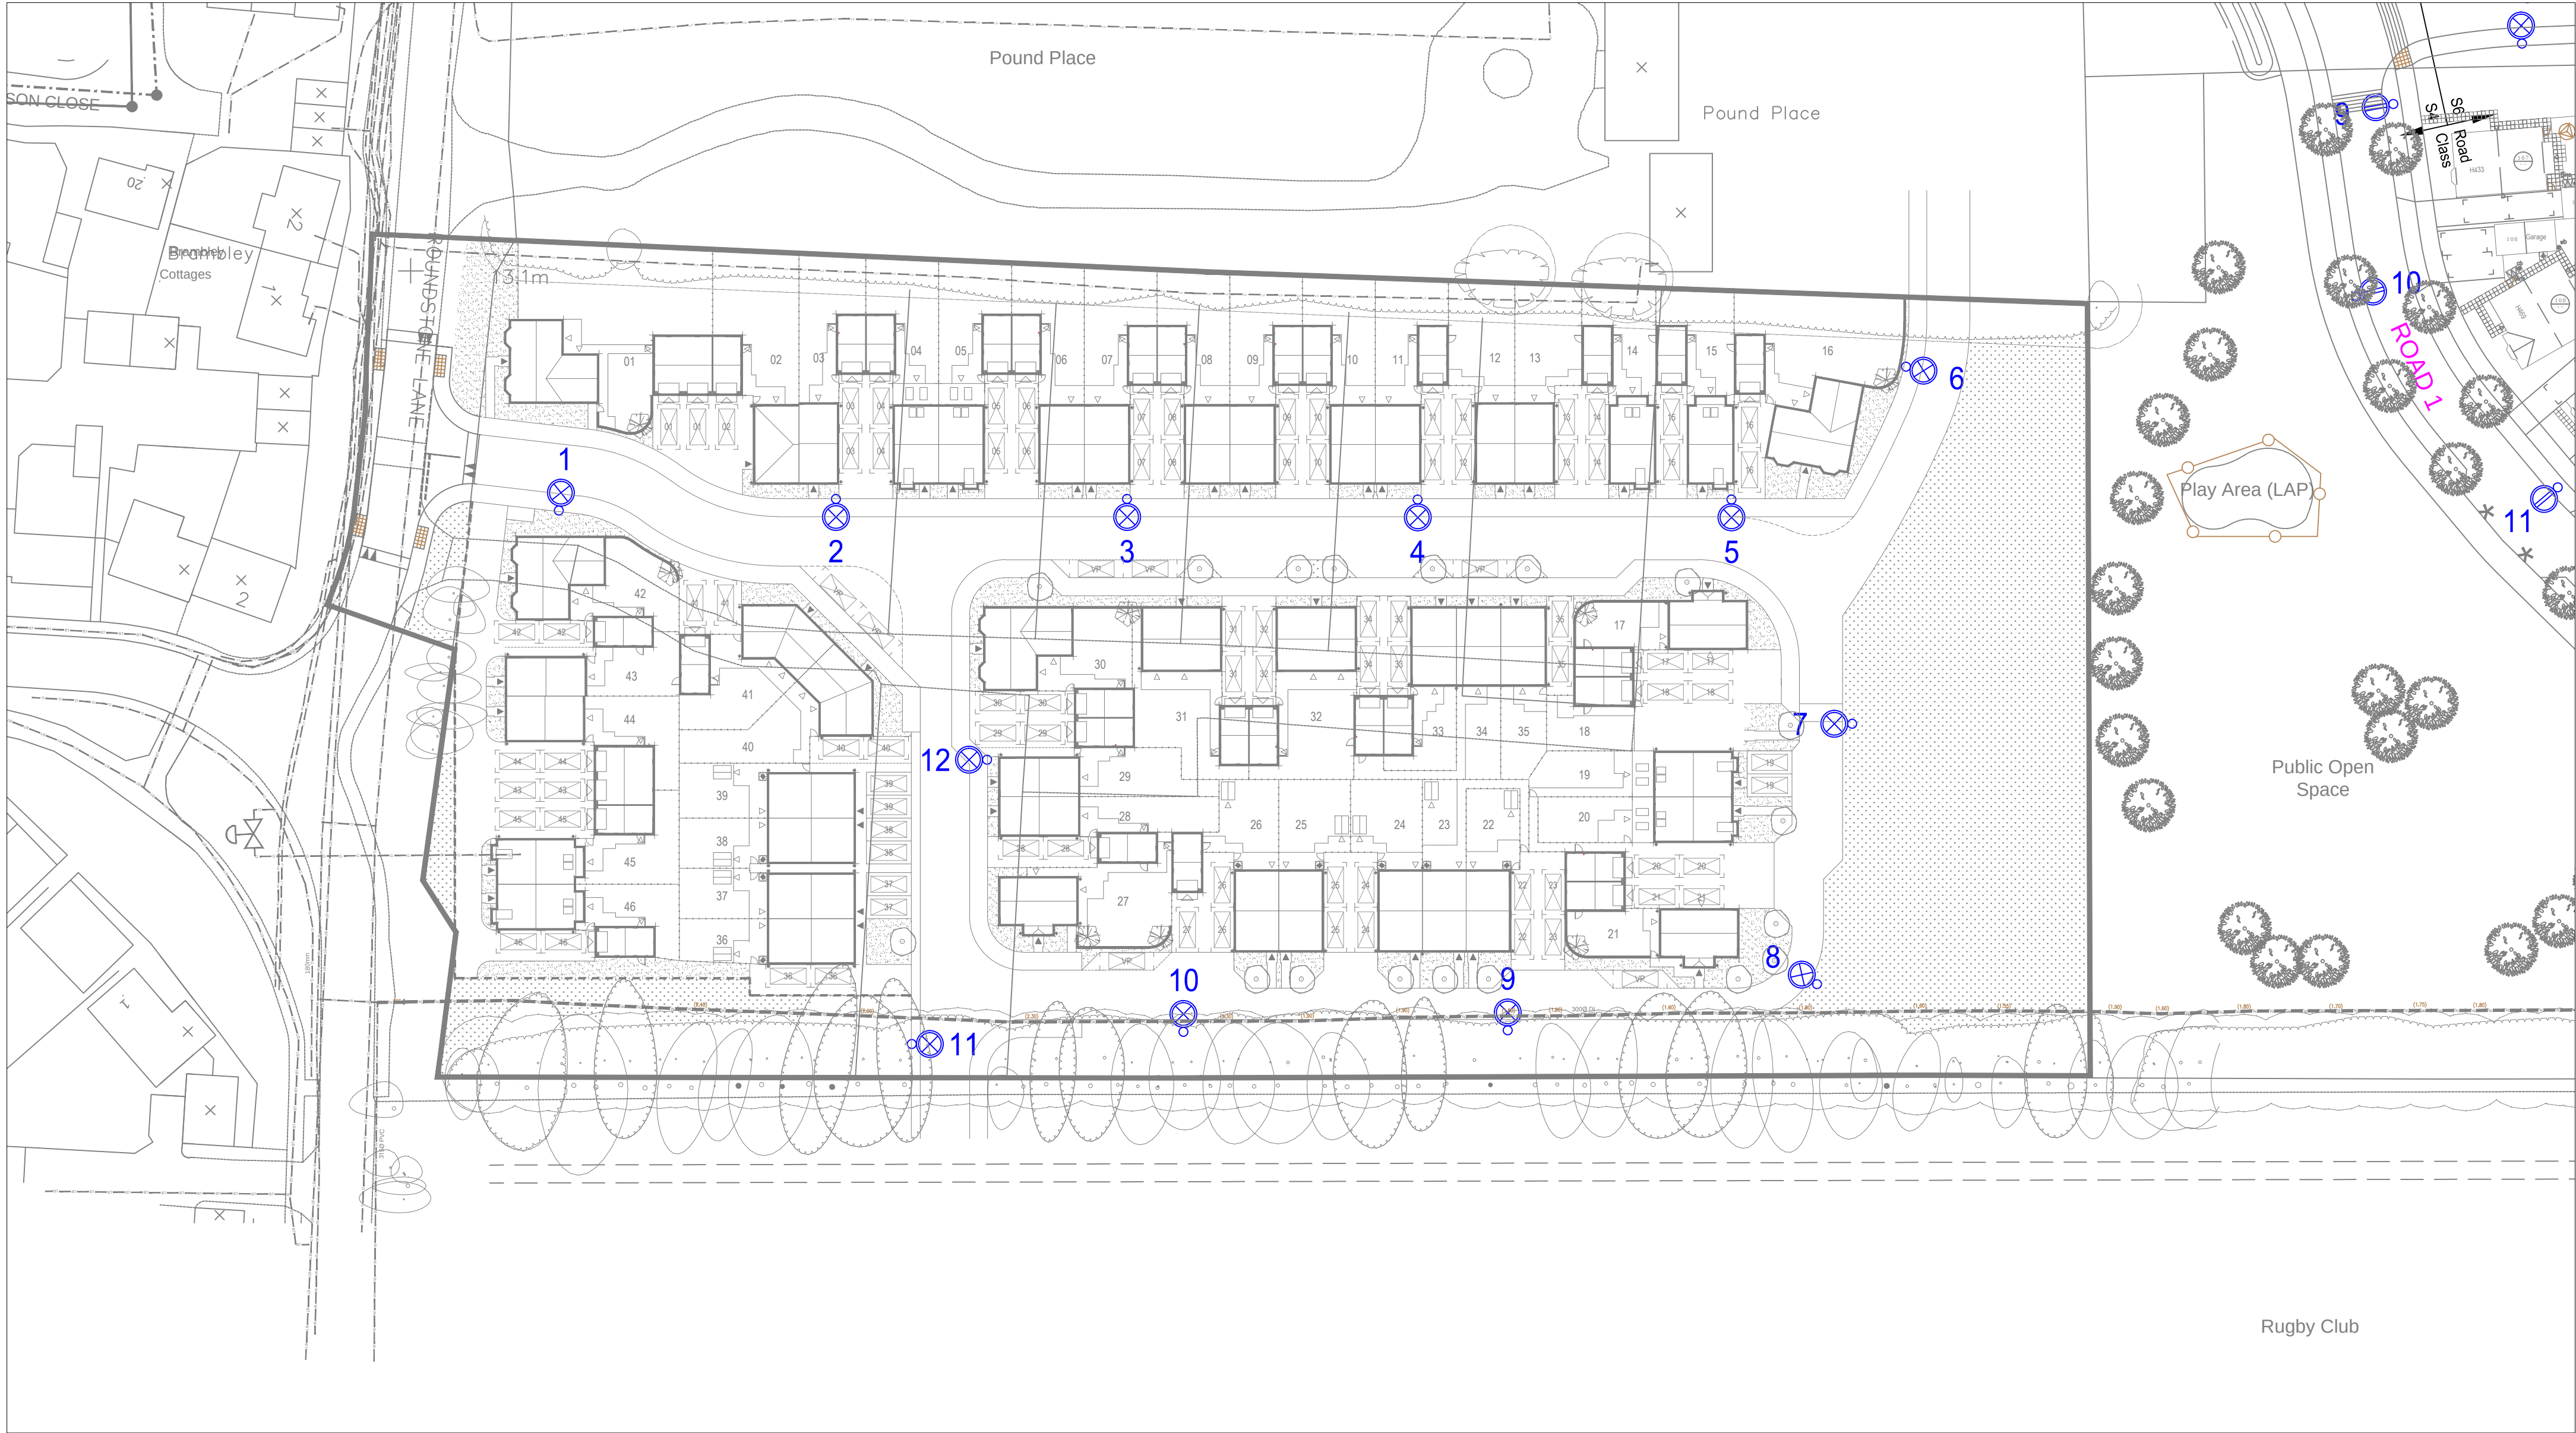

- NOTES
- DO NOT SCALE FROM DRAWING.
 - ALL STREET LIGHTING EQUIPMENT AND WORKS TO BE CARRIED OUT IN ACCORDANCE WITH CURRENT WEST SUSSEX COUNTY COUNCIL SPECIFICATION.
 - CONTRACTOR TO CONFIRM POSITION OF STATUTORY UNDERTAKERS PLANT BEFORE COMMENCEMENT OF THE WORKS.
 - DURING WORKS ALL TRAFFIC MANAGEMENT TO BE IN ACCORDANCE WITH CHAPTER 8 OF THE TRAFFICS SIGNS MANUAL.
 - LIGHTING COLUMNS TO BE FED BY DNO SUPPLY.
 - LUMINAIRES TO BE CONTROLLED BY MAYFLOWER EXTERNAL NODE AND FITTED WITH A MAYFLOWER COMPATIBLE ELECTRONIC BALLAST VIA DALI PROTOCOL.
 - MAYFLOWER COMPLETE LIGHTING CONTROL SIX PIN NEMA SOCKET IN EACH LANTERN.
 - MAINTENANCE NUMBERS TO BE CONFIRMED BY WSCC.
 - ONE MAYFLOWER COMPLETE LIGHTING CONTROL DALI SUB-MASTER UNIT TO BE INSTALLED TO CONTROL NODES AND LINK CENTRAL MANagementsystem.

COLUMN SETBACKS
COLS. 7 - 8 - 800m FROM KERB
COLS. 9 - 10 - 1200m FROM KERB
COLS. 1 - 6, 11 - 12 - BACK OF FOOTPATH

LIGHTING LEVELS
LIGHTING LEVELS COMPLY WITH BS5489-1:2013 AND WEST SUSSEX COUNTY COUNCIL LATEST EMAIL "LIGHTING DESIGN AMENDMENTS 17/07/2013" DATED 17/07/2013.

A	ORIGINAL ISSUE	07/04/15	MWG
REV	DESCRIPTION	DATE	BY



SSE Contracting

SSE CONTRACTING - LIGHTING SERVICES
UNIT 1, FLANDERS ROAD
HEDGE END
SOUTHAMPTON
SO30 2LG
TEL: 01489 771700
EMAIL: lighting.design@ssecontracting.com

TITLE
POUND NURSERY
STREET LIGHTING
DESIGN LAYOUT

AREA ROUNDSTONE ROAD ANGMERING	
SCALE 1:500	DATE 07/04/15
	DRAWN MWG
	CHECKED SB
PAPER SIZE A1	APPROVED SB

DRAWING NUMBER SSE-912905-SL-002	REVISION A
-------------------------------------	---------------

DRAWING STATUS		
 FOR COMMENT / APPROVAL	CONTRACT DRAWING	AS BUILT DRAWING