



Climbing plants and bold foliage




Species-rich grass



Mixture of grasses and lavender



Annuals

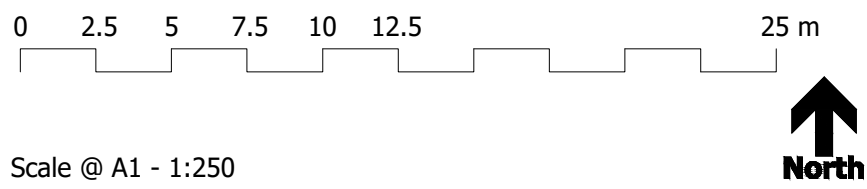

Scale @ A1 - 1:250

A109012 LA100-106[D].dwg 16 September 2020



Native shrubs - north and eastern boundaries							
Number of Plants	Abbreviation	Species	Specification	Height	Pot Size	Density	Mix Species Contribution
40	CORSA	Cornus sanguinea	Branched :4 brks :C	40-60cm	3L	1Ctr	35%
40	Cav	Corylus avellana	Branched :3 brks :C	60-80cm	3L	1Ctr	35%
25	E e	Euonymus europaeus	Branched :4 brks :C	40-60cm	3L	1Ctr	20%
14	SAMNI	Sambucus nigra	Branched :3 brks :C	40-60cm	2L	1Ctr	10%
Total :119							Total :100%

Native scrub							
Number	Abbreviation	Species	Specification	Height	Pot Size	Density	Percentage Contribution
22	CLEVI	Clematis vitalba	Several Shoots :2 brks :C	60-80cm	2L	1Ctr	3%
121	CORSA	Cornus sanguinea	Branched :4 brks :C	40-60cm	3L	1Ctr	20%
150	Cav	Corylus avellana	1+1 or 1/1 :Branched : :2 brks :B	40-60cm		1Ctr	25%
91	EUON	Euonymus europaeus	1+2 :Branched :5 brks :B	60-80cm		1Ctr	15%
44	Ia	Ilex aquifolium	C: Leader and laterals	40-60cm	2L	1Ctr	7%
32	LIGVU	Ligustrum vulgare	1+1 or 1/1 :Branched :3 brks :B	60-80cm		1Ctr	5%
22	RIBRU	Ribes rubrum	1+1 or 1/1 :Branched :3 brks :B	60-80cm		1Ctr	3%
44	Rca	Rosa canina	1+1 or 1/1 :Branched : :3 brks :B	60-80cm		1Ctr	7%
32	SAMNI	Sambucus nigra	1+1 or 1/1 :Branched :3 brks :B	60-80cm		1Ctr	5%
62	VIBLA	Viburnum lanata	1+2 or 1/2 :Branched :3 brks :B	60-80cm		1Ctr	10%
Total :620							

Climbers					
Number	Abbreviation	Species	Specification	Height	Pot Size
10	LONBELA	Lonicera periclymenum 'Belgica'	Several Shoots :5 brks :C	100-150cm	10L

Grasses			
Number	Abbreviation	Species	Specification Density
610	CALACKF	Calamagrostis acutiflora 'Karl Foerster'	C 0.5Ctr

188	Carpinus betulus		150-175cm	Feather :3 brks :2x :B
-----	------------------	--	-----------	------------------------

Shrubs						
Number of Plants	Abbreviation	Species	Height	Pot Size	Specification	Density
141	CHOTE	Choisya ternata	40-60cm	5-7.5L	Bushy :5 brks :C	0.7Ctr
281	CaS	Cornus alba 'Sibirica'	80-100cm	10L	Branched :5 brks :C	0.7Ctr
64	Cav	Corylus avellana	60-80cm	3L	Branched :3 brks :C	Counted
239	EfDsB	Euonymus fortunei 'Dart's Blanket'	30-40cm	3L	Bushy :5 brks :C	0.5Ctr
425	EfEG	Euonymus fortunei 'Emerald Gaiety'	30-40cm	5-7.5L	Bushy :9 brks :C	0.5Ctr
464	HEBRA	Hebe rakaiensis	30-40cm	5-7.5L	Bushy :7 brks :C	0.5Ctr
115	ILECR	Ilex crenata	40-60cm	3L	Leader With Laterals :C	0.4Ctr
175	LAU NOB	Laurus nobilis	60-80cm	3L	Leader With Laterals :C	0.3Ctr Double Staggered at 0.25m offset
685	LaH	Lavandula angustifolia 'Hidcote'	30-40cm	5-7.5L	Bushy :7 brks :C	0.6Ctr
420	LIGOV	Ligustrum ovalifolium	60-80cm	3L	Branched :5 brks :C	0.4Ctr
260	MaA	Mahonia aquifolium 'Apollo'	40-60cm	5-7.5L	Branched :C	0.6Ctr
182	OLEHA	Olearia x haastii	40-60cm	5-7.5L	Bushy :5 brks :C	0.7Ctr
267	PfA	Potentilla fruticosa 'Abbotswood'	30-40cm	5-7.5L	Bushy :5 brks :C	0.6Ctr
253	PIOL	Prunus laurocerasus 'Otto Luyken'	40-60cm	5-7.5L	Bushy :5 brks :C	0.6Ctr
202	ROSOFMIJU	Rosmarinus offi. 'Miss Jessop's Upright'	30-40cm	3L	Bushy :4 brks :C	0.45Ctr
215	SjAW	Spiraea japonica 'Anthony Waterer'	40-60cm	5-7.5L	Branched :7 brks :C	0.6Ctr
Total :4388						

Dormice mitigation planting						
Number	Abbreviation	Species	Specification	Density	Weight	Percentage Contribution
118	CORSA	Cornus sanguinea	1+1 :Branched :3 brks :BR	1Ctr		10%
348	CORAV	Corylus avellana	1+1 :Branched :2 brks :BR	1Ctr		30%
233	CRAMO	Crataegus monogyna	1+1 :Transplant :Branched :3 brks :B	1Ctr		20%
118	ILEAQ	Ilex aquifolium	Leader With Laterals :C	1Ctr		10%
118	PRUSP	Prunus spinosa	1+1 :Branched :2 brks :BR	1Ctr		10%
118	ROSCA	Rosa canina	1+1 :Branched :3 brks :BR	1Ctr		10%
60	SAMNI	Sambucus nigra	1+1 :Branched :3 brks :BR	1Ctr		5%
60	VIBOP	Viburnum opulus	1+2 :Branched :3 brks :BR	1Ctr		5%
Total :1173						

Herbaceous			
Abbreviation	Species	Specification	Density
SEDSP	Sedum spectabile	C	0.45Ctr
ACHMO	Achillea 'Moonshine'	C	0.4Ctr