dwg 16

dwg 17

Planting schedule area 17

Trees

No.	Species Name	Girth	Height	Density	Specification
6 No.	Carpinus betulus	12-14cm	350-425cm	Counted	Heavy Standard :Clear Stem min .200 :5 brks :2x :RB
1 No.	Quercus robur	14-16cm	425-600cm	Counted	Extra Heavy Standard :Clear Stem 175-200 :3x :RB: Native
1 No.	Tilia cordata	16-18cm	450-500cm	Counted	Extra Heavy Standard :RB : Native
16 No.	Tilia euchlora	16-18cm	450-500cm	Counted	Extra Heavy Standard :RB

Total :24 No.

Hedging

Number of Plants	Species Name	Height	Pot Size	Specification	Density
405 No.	Escallonia 'Pink Elf'	40-60cm	5-7.5L	Bushy :6/9 brks :C	0.5Ctr Double Staggered at 0.5m offset
59 No.	Ligustrum ovalifolium	80-100cm	10L	Bushy	0.5Ctr Double Staggered at 0.5m offset

Total :464 No.

Shrubs

No.	Species Name	Height	Pot Size	Specification	Density
13 No.	Buddleja 'Buzz Lavender'	40-60cm	3L	Branched	4/m²
23 No.	Ceanothus thyrsiflorus repens	30-40cm	5-7.5L	Bushy	4/m²
5 No.	Choisya 'Aztec Pearl'	40-60cm	5-7.5L	Bushy	4/m²
1 No.	Cotinus coggygria 'Royal Purple'	40-60cm	5L	Bushy	Counted
23 No.	Cotoneaster conspicuus 'Decorus'	40-60cm	3L	Bushy	4/m²
6 No.	Daphne odora rubra	40-60cm	5-7.5L	Bushy	4/m²
14 No.	Euonymus fortunei 'Emerald Gaiety'	30-40cm	3L	Bushy	4/m²
15 No.	Euonymus fortunei 'Silver Queen'	30-40cm	3L	Bushy	4/m²
35 No.	Hebe 'Nicola's Blush'	30-40cm	5-7.5L	Bushy	4/m²
26 No.	Hebe franciscana 'Blue Gem'	40-60cm	5-7.5L	Bushy	4/m²
4 No.	Laurus nobilis	80-100cm	10L	Pyramid	Counted
23 No.	Lavandula angustifolia 'Hidcote'	30-40cm	5-7.5L	Bushy	4/m²
13 No.	Olearia haastii	40-60cm	5-7.5L	Bushy	4/m²
16 No.	Philadelphus 'Manteau d'Hermine'	30-40cm	3L	Bushy	4/m²
6 No.	Pieris japonica 'Debutante'	40-60cm	3L	Bushy	4/m²
8 No.	Pittosporum tenuifolium 'Tom Thumb'	40-60cm	5-7.5L	Bushy	4/m²
11 No.	Potentilla fruticosa 'Pink Queen'	30-40cm	5-7.5L	Bushy	4/m²
6 No.	Rosa 'Ballerina'	30-40cm	3L	Bushy	4/m²
16 No.	Santolina chamaecyparissus 'Nana'	30-40cm	3L	Bushy	4/m²
7 No.	Sarcococca hookerana digy. 'Purple Stem'	40-60cm	5-7.5L	Bushy	4/m²
8 No.	Viburnum davidii	40-60cm	3L	Bushy	4/m²
23 No.	Vinca minor 'Atropurpurea'	20-30cm	3L	Several shoots	6/m²

Total :312 No.

Climbers

No.	Species Name	Height	Pot Size	Specification	Density
12 No.	Jasminum officinale 'Devon Cream'	80-100cm	3L	Several Shoots :Caned	4/m²
1 No.	Jasminum officinale 'Devon Cream'	80-100cm	3L	Several Shoots :Caned	Counted

Total :13 No.

Herbaceous

No.	Species Name	Height	Pot Size	Specification	Density
10 No.	Bergenia 'Bressingham Ruby'		3L	Full Pot	6/m²
42 No.	Geranium macrorrhizum 'White-Ness'		2L	Full Pot	6/m²
7 No.	Helleborus niger		3L	Full Pot	6/m²
14 No.	Miscanthus sinensis 'Gracillimus'		5-7.5L		4/m²
12 No.	Pulmonaria officinalis 'Sissinghurst White'		2L	Full Pot	6/m²

Total :85 No.

Legend

- Existing vegetation to be retained
- Existing hedgerow to be trimmed back to 4m width and maintained as a native hedgerow
- Proposed tree planting within soft landscape. See detail on sheet
- Proposed tree planting within hard landscape. See detail on sheet
- Proposed specimen shrub planting
- Proposed climbing plants to be trained up adjacent wall/ fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
- Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row and maintained at 0.5m height
- Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row and maintained at 1m height
- Proposed hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row and maintained at 1.8m height
- Proposed Shrub planting to receive 75mm bark mulch
- Proposed bulb planting
- Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
- Existing grasslands to be retained any bare or damaged areas to be seeded with grassland mix A18 as supplied from 'Germinal Seeds' (Tel: 01522 868714)
- Area to be seeded with wildflower grassland mix WFG19 as supplied from 'Germinal Seeds' (Tel: 01522 868714)
- Proposed wildflower grassland to be seeded with a combination of WFG18 Butterfly and Honey Bee as supplied by 'Germinal Seeds' . Shaded areas to be seeded with WFG8 wildflower seed mix by 'Germinal Seeds' (Tel: 01522 868714) or similar and approved.
- Cut lines
- Site Boundary

Tree Planting Pit Detail within Soft Landscape



Root Rain Metro tree pit irrigation system as supplied by Green-Tech Industries or similar and approved

Pressure impregnated softwood stakes driven into ground with a minimum of 400mm below ground

The tree should be positioned in the hole so that the top of the rootball is level with the surrounding ground level

Backfilled material to be either originally excavated soil or imported soil to BS3882:2007. If judged to be of poor quality then suitable well rotted organic matter must be added. To be backfilled in layers of 300mm, each layer to be lightly firmed in with heel, to exclude large voids

Wire cage to be left on, and folded back/cut away around stem, if rootballed.

Rubber belting and spacer block attached with galvanised nails as supplied from Green-Tech Industries or similar and approved with tie height 1/3 stem height

Good quality, well rotted mulch to be applied to a minimum of 75mm depth, and no more than 150mm, leaving the stem base clear and mulch free

Tree pit to be no deeper than rootball, 600mm larger than rootball on all sides, and should be square with sides and base of pit to be forked over

All components as supplied from Green Leaf or similar and approved

SPECIFICATION
Forestry Commission Practice note 8.
All native species should be of local stock. Native trees and shrubs certified as British Native plant stock.
All planting stock should comply with the Horticultural Trade Association National Plant specification.
All planting preparation, handling, planting & maintenance should be in accordance with CPSE Code for Handling and Establishing plants.
All trees and shrubs to comply with BS 3936 Part 1 1992, planted to BS 4043:1989 and BS 4428:1989.
All works generally, to comply with the written Soft Landscape Specification.
Topsoil incorporated into planting beds to be gently mounded towards the centre of each bed to allow for settlement.
On completion of planting the whole area of the shrub bed shall be mulched with 75mm consolidated thickness of medium textured decorative grade natural pine bark having first been prepared in accordance with the specification.
Free standing hedges shall have a 3 strand galvanised wire and tanalised softwood timber post fence, to BS 1722-2:2000, erected along a line between the two rows of hedge plants.
All existing trees and hedges to be protected in accordance with BS5837:2012 for the duration of the construction period.

NOTE: DO NOT SCALE FROM DRAWING

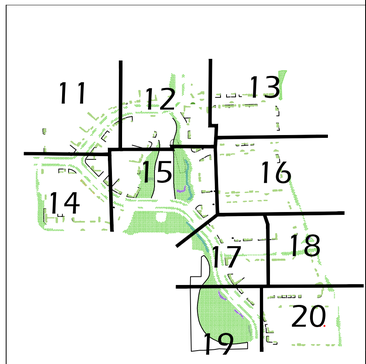

Rev	Date	Details	Drawn
B	17.02.14	Layout change	AK
A	24.07.12	Ecologist comments	DKM

ACD
Ecology
Arboriculture
Landscape Architecture

ACD Landscape Architects & ACD Ecology
Rodbourne Rail Business Centre, Grange Lane, Malmesbury, Wilts, SN16 0ES
Tel: 01666 825646 Fax: 01666 824654

ACD Arboriculture
Tanners, Lower Street,Haslemere, Surrey, GU27 2PE
Tel: 01483 425714 Fax: 01428 641090

ACD (Landscape Architects) Southampton
12 Southgate Street, Winchester, Hampshire, SO23 9EF
Tel: 01962 855604

www.acdlandscape.co.uk

Space to live
David Wilson Homes

scheme: Roundstone Lane
Angmering
client: Barratt David Wilson
drawing: Soft Landscape Proposals
date: July 2012
scale: 1:200@A1
drawing no: BSH 17576 17B
drawn: DKM checked: AW

Copyright of ACD Landscape Architects Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted: 2012. Copyright of this plan remains with ACD until all fees have been paid in full.