


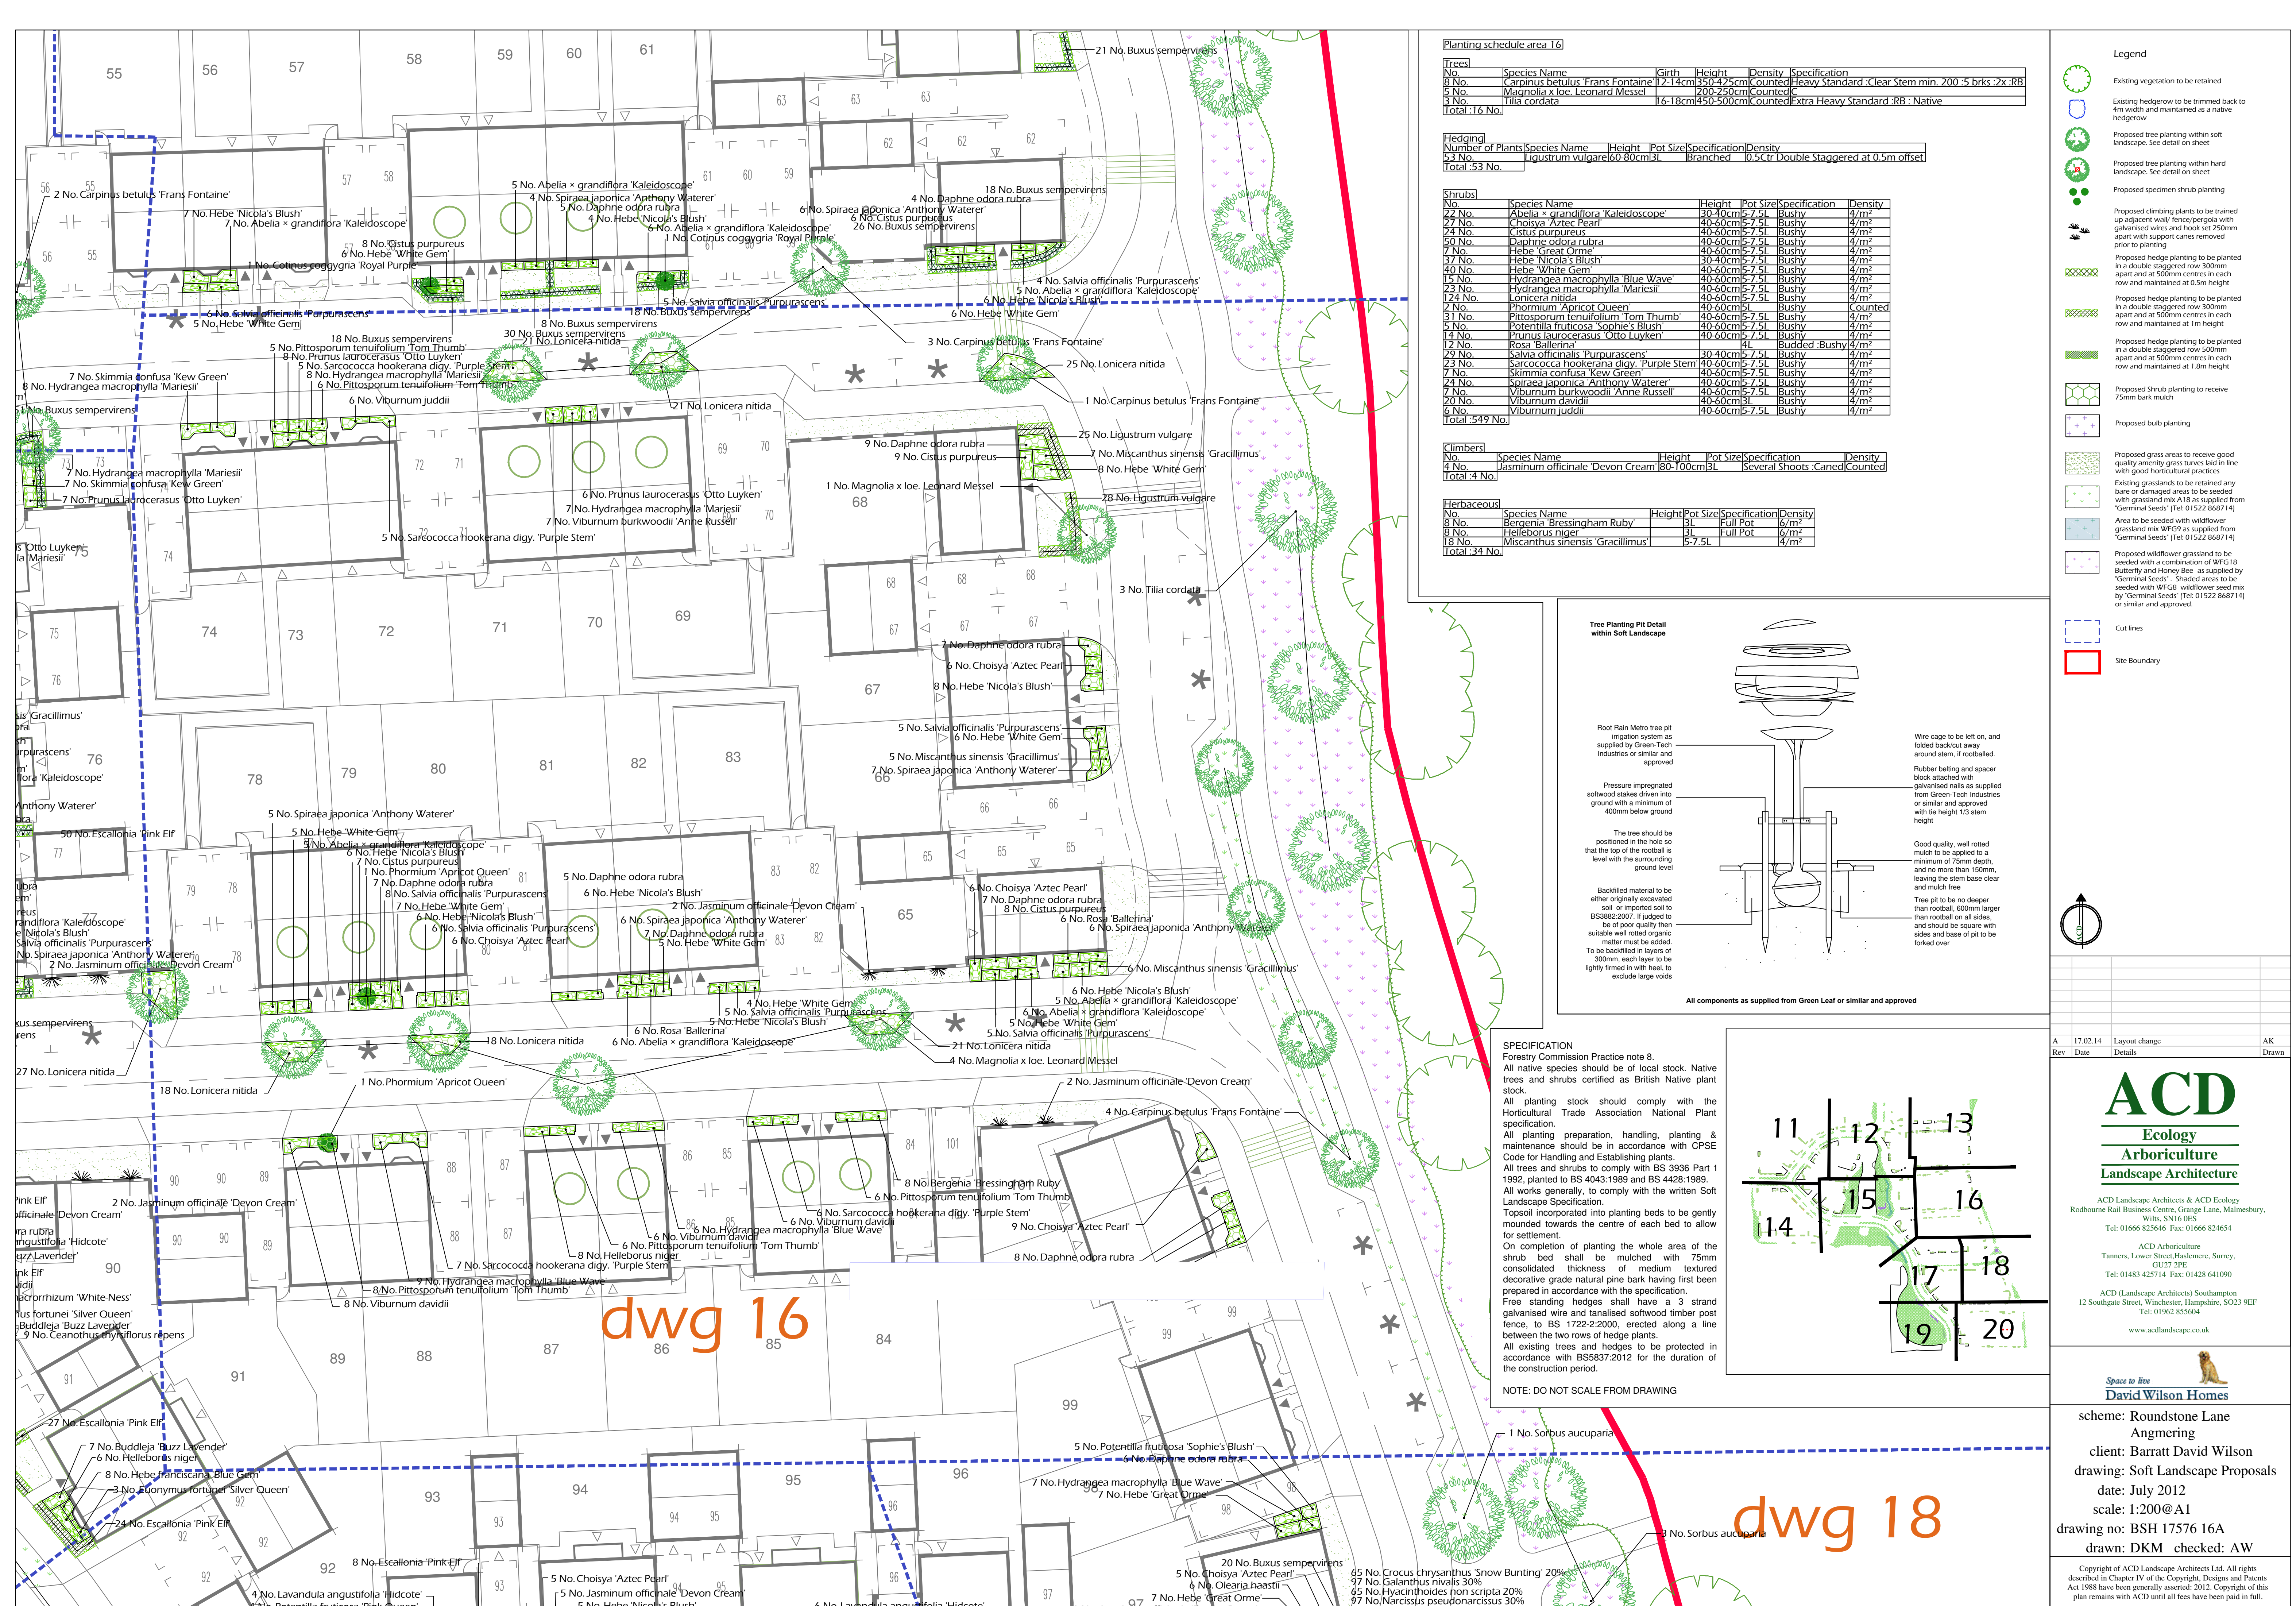

Planting schedule area 16

No.	Species Name	Girth	Height	Density	Specification
8 No.	Carpinus betulus 'Frans Fontaine'	2-14cm	350-425cm	Counted	Heavy Standard Clear Stem min. 200-5 brks 2x RB
5 No.	Magnolia x loe. Leonard Messel		200-250cm	Counted	C
3 No.	Tilia cordata	16-18cm	450-500cm	Counted	Extra Heavy Standard RB Native
Total: 16 No.					


No.	Species Name	Height	Pot Size	Specification	Density
53 No.	Ligustrum vulgare	60-80cm	3L	Branched	0.5ctr Double Staggered at 0.5m offset
Total: 53 No.					

(Shrubs)	No.	Species Name	Height	Pot Size	Specification	Density
	22 No.	Abelia x grandiflora 'Kaleidoscope'	30-40cm	5-7.5L	Bushy	4/m²
	27 No.	Choisya 'Aztec Pearl'	40-60cm	5-7.5L	Bushy	4/m²
	24 No.	Cistus purpureus	40-60cm	5-7.5L	Bushy	4/m²
	50 No.	Daphne odora rubra	40-60cm	5-7.5L	Bushy	4/m²
	7 No.	Hebe 'Great Orme'	40-60cm	5-7.5L	Bushy	4/m²
	37 No.	Hebe 'Nicola's Blush'	30-40cm	5-7.5L	Bushy	4/m²
	40 No.	Hebe 'White Gem'	40-60cm	5-7.5L	Bushy	4/m²
	15 No.	Hydrangea macrophylla 'Blue Wave'	40-60cm	5-7.5L	Bushy	4/m²
	23 No.	Hydrangea macrophylla 'Mariessii'	40-60cm	5-7.5L	Bushy	4/m²
	24 No.	Lonicera nitida	40-60cm	5-7.5L	Bushy	4/m²
	1 No.	Phormium 'Apricot Queen'	40-60cm	5L	Bushy	Counted
	31 No.	Pittosporum tenuifolium 'Tom Thumb'	40-60cm	5-7.5L	Bushy	4/m²
	5 No.	Potentilla fruticosa 'Sophie's Blush'	40-60cm	5-7.5L	Bushy	4/m²
	14 No.	Prunus laurocerasus 'Otto Luyken'	40-60cm	5-7.5L	Bushy	4/m²
	12 No.	Rosa 'Ballerina'		4L	Budded Bushy	4/m²
	29 No.	Salvia officinalis 'Purpurascens'	30-40cm	5-7.5L	Bushy	4/m²
	23 No.	Sarcococca hookeriana digy. 'Purple Stem'	40-60cm	5-7.5L	Bushy	4/m²
	7 No.	Skimmia confusa 'Kew Green'	40-60cm	5-7.5L	Bushy	4/m²
	24 No.	Spiraea japonica 'Anthony Waterer'	40-60cm	5-7.5L	Bushy	4/m²
	7 No.	Viburnum burkwoodii 'Anne Russell'	40-60cm	5-7.5L	Bushy	4/m²
	20 No.	Viburnum davidii	40-60cm	3L	Bushy	4/m²
	6 No.	Viburnum judii	40-60cm	5-7.5L	Bushy	4/m²
	Total: 549 No.					

No.	Species Name	Height	Pot Size	Specification	Density
4 No.	Jasminum officinale 'Devon Cream'	80-100cm	3L	Several Shoots Caned	Counted
Total: 4 No.					

No.	Species Name	Height	Pot Size	Specification	Density
8 No.	Bergenia 'Bressingham Ruby'	3L	Full Pot	6/m²	
18 No.	Miscanthus sinensis 'Gracillimus'	5-7.5L	Full Pot	4/m²	
Total: 34 No.					


Tree Planting Pit Detail within Soft Landscape

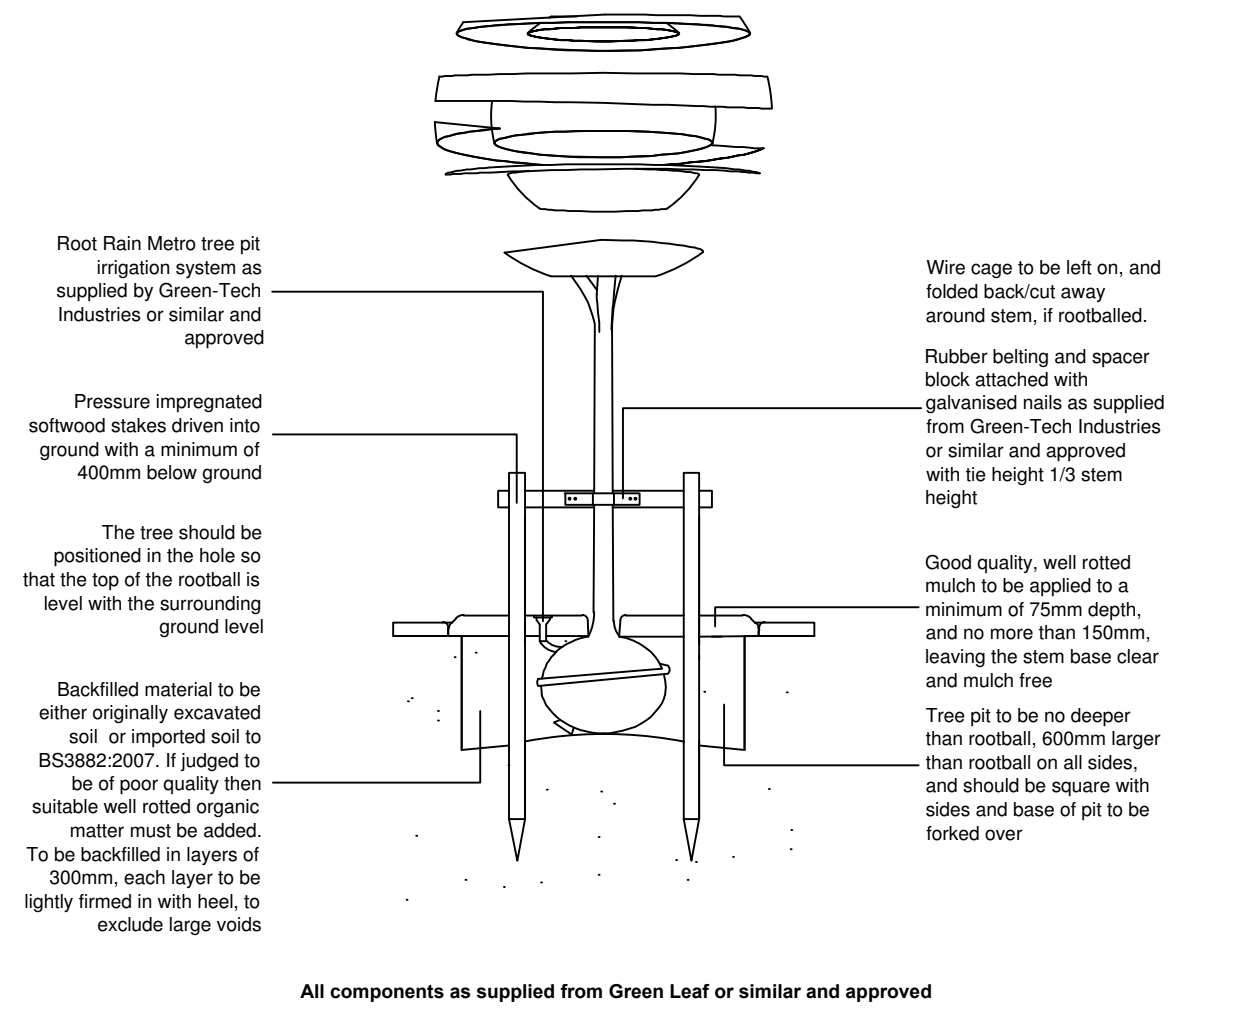

SPECIFICATION
Forestry Commission Practice note 8.
All native species should be of local stock. Native trees and shrubs certified as British Native plant stock.
All planting stock should comply with the Horticultural Trade Association National Plant specification.
All planting preparation, handling, planting & maintenance should be in accordance with CPSE Code for Handling and Establishing plants.
All trees and shrubs to comply with BS 3936 Part 1 1992, planted to BS 4043:1989 and BS 4428:1989.
All works generally, to comply with the written Soft Landscape Specification.
Topsoil incorporated into planting beds to be gently mounded towards the centre of each bed to allow for settlement.
On completion of planting the whole area of the shrub bed shall be mulched with 75mm consolidated thickness of medium textured decorative grade natural pine bark having first been prepared in accordance with the specification.
Free standing hedges shall have a 3 strand galvanised wire and tanalised softwood timber post fence, to BS 1722-2:2000, erected along a line between the two rows of hedge plants.
All existing trees and hedges to be protected in accordance with BS5837:2012 for the duration of the construction period.

NOTE: DO NOT SCALE FROM DRAWING

- Legend**
- Existing vegetation to be retained
 - Existing hedgerow to be trimmed back to 4m width and maintained as a native hedgerow
 - Proposed tree planting within soft landscape. See detail on sheet
 - Proposed tree planting within hard landscape. See detail on sheet
 - Proposed specimen shrub planting
 - Proposed climbing plants to be trained up adjacent wall/fence/pergola with galvanised wires and hook set 250mm apart with support canes removed prior to planting
 - Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row and maintained at 0.5m height
 - Proposed hedge planting to be planted in a double staggered row 300mm apart and at 500mm centres in each row and maintained at 1m height
 - Proposed hedge planting to be planted in a double staggered row 500mm apart and at 500mm centres in each row and maintained at 1.8m height
 - Proposed Shrub planting to receive 75mm bark mulch
 - Proposed bulb planting
 - Proposed grass areas to receive good quality amenity grass turves laid in line with good horticultural practices
 - Existing grasslands to be retained any bare or damaged areas to be seeded with grassland mix A18 as supplied from 'Germinal Seeds' (Tel: 01522 868714)
 - Area to be seeded with wildflower grassland mix WF69 as supplied from 'Germinal Seeds' (Tel: 01522 868714)
 - Proposed wildflower grassland to be seeded with a combination of WF618 Butterfly and Honey Bee as supplied by 'Germinal Seeds'. Shaded areas to be seeded with WF68 wildflower seed mix by 'Germinal Seeds' (Tel: 01522 868714) or similar and approved.
 - Cut lines
 - Site Boundary



A	17.02.14	Layout change	AK
Rev	Date	Details	Drawn

ACD
Ecology
Arboriculture
Landscape Architecture

ACD Landscape Architects & ACD Ecology
Rodbourne Rail Business Centre, Grange Lane, Malmesbury,
Wiltshire, SN16 0ES
Tel: 01666 825646 Fax: 01666 824654

ACD Arboriculture
Tanners, Lower Street, Haslemere, Surrey,
GU27 2PE
Tel: 01483 425714 Fax: 01428 641090

ACD (Landscape Architects) Southampton
12 Southgate Street, Winchester, Hampshire, SO23 9EF
Tel: 01962 855604
www.acdlandscape.co.uk

Space to live
David Wilson Homes

scheme: Roundstone Lane
Angmering
client: Barratt David Wilson
drawing: Soft Landscape Proposals
date: July 2012
scale: 1:200@A1
drawing no: BSH 17576 16A
drawn: DKM checked: AW

Copyright of ACD Landscape Architects Ltd. All rights described in Chapter IV of the Copyright, Designs and Patents Act 1988 have been generally asserted. 2012. Copyright of this plan remains with ACD until all fees have been paid in full.