

CEDRAL

Timelessly beautiful facades

✓ *low maintenance*

✓ *factory applied colour*

✓ *easy to install*

Give your home
a timeless facade

www.cedral.co.uk



- *low maintenance*

- *factory applied colour*

- *easy to install*

Timelessly beautiful facades

With the visual appeal of natural timber, simplicity of installation and resistance to rot, the Cedral range offers an attractive, low maintenance alternative to PVCu and timber weatherboard.



- ✓ low maintenance


- ✓ factory applied colour

- ✓ easy to install

CEDRAL
Timelessly beautiful facades



The DNA of Cedral

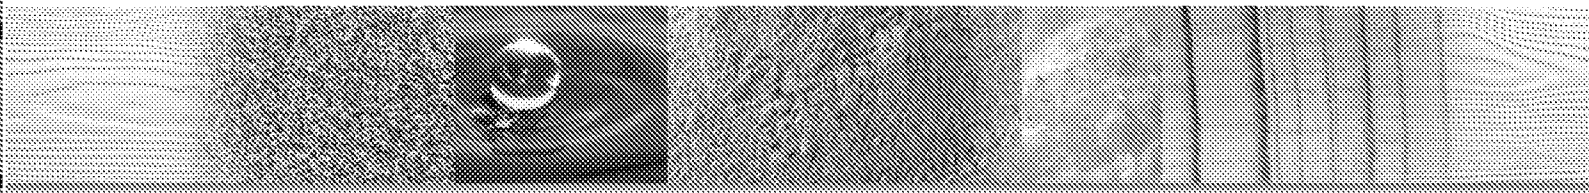

The ideal low maintenance, rot free alternative to traditional timber weatherboard.


Fibre cement offers both contemporary and flexible design options, and is used by many architects and homeowners to create stunning facades. The simple combination of wood cellulose, sand, synthetic fibres, water and cement make fibre cement one of the most environmentally friendly and comprehensive building products available.

Hard as stone easy as wood.

The material's multi-layered fibre structure supports the cement and other elements, which gives it impressive strength, and means that it can be far thinner than concrete.

TIMBER EFFECT

SMOOTH FINISH




For your
free sample, visit:
www.cedral.co.uk

Which Cedral style suits you?

CEDRAL LAP


Cedral Lap planks are fitted in a traditional lapped style.

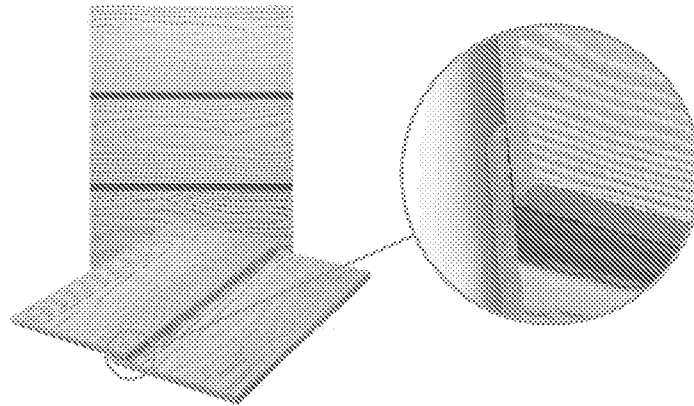

Cedral timber effect

CEDRAL CLICK

Cedral Click planks are fitted together flush, creating a modern and contemporary facade.
Available in two finishes.

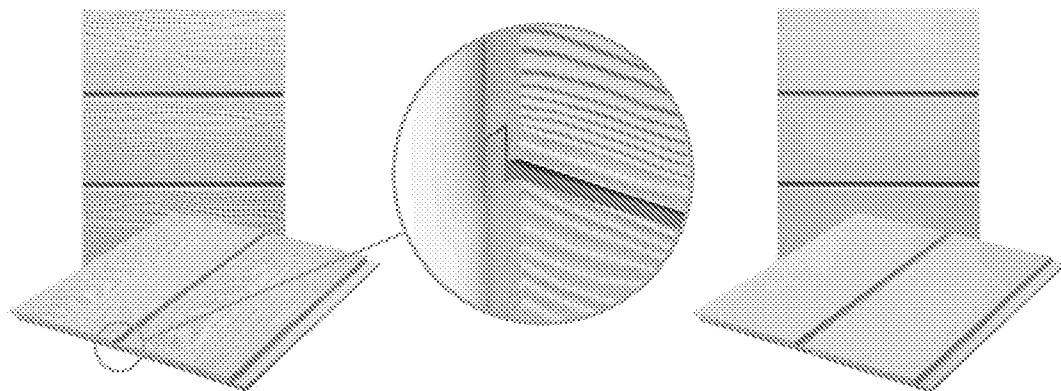

Cedral timber effect

Cedral smooth finish

Dimensions	Cedral Lap	Cedral Click
Length	3600mm	3600mm
Width	190mm	186mm
Thickness	10mm	12mm
Weight per board	11.2kg	12.2kg


Cedral colours

Cedral Lap can be supplied in a range of 21 factory applied colours and 2 woodstain finishes providing an aesthetic option to suit most project requirements.


Cedral Click and Cedral Click Smooth finishes can be supplied in a range of 10 factory applied colours. Other colours within the range, bespoke colours and Cedral Click Smooth are subject to minimum order quantities and extended lead times.

For your nearest stockist, visit www.cedral.co.uk


THE MINERAL RANGE




C01 White†




C51 Silver Grey




C05 Grey†



C52 Pearl™




C54 Pewter†




C50 Black†


THE FOREST RANGE




C07 Cream White†




C02 Beige




C08 Sand Yellow™



C57 Sage Green™



C60 Forest Grey™



C04 Dark Brown™†


Ⓢ Cedral Click and Cedral Click Smooth standard factory-applied colour range.

* Not available for Cedral Click or Cedral Click Smooth.


™ Cedral Click and Cedral Click Smooth may be subject to minimum order quantities and extended lead times.

† Cedral Board is available in these colours.


THE EARTH RANGE




C03 Grey Brown[†]




C14 Atlas Brown^{††}




C55 Taupe^{††}



C61 Burnt Red^{††}




CL104 Light Oak[†]




CL105 Dark Oak[†]


THE OCEAN RANGE




C06 Grey Green^{††}




C10 Blue Grey^{††}



C62 Violet Blue^{††}



C15 Dark Grey



C18 Slate Grey[†]



Complete system solution

ALUMINIUM PROFILES

A full range of aluminium profiles is available in complementary colours, for both Cedral Lap and Click, which provides a complete cladding solution. Please refer to the Cedral fixing guide for more information on the aluminium profiles. To order a copy of the Cedral fixing guide, please call 01283 722588.

Profile (sizes in mm)	Cedral Lap	Cedral Click
External corner (symmetric) This universal trim can be used to provide protection on external corners and for stop profile applications.		
External corner/window reveal (asymmetric) Can be used at an external corner or where detailing on a window reveal.		Not required
Internal corner To finish the corner where Cedral meets on an internal corner forming a seal between the trim and the corner.		
External corner junction Used as a corner joining piece. Only available in black. 300mm length.		
Start profile Used to start a cladding run with a lip to cover the first batten.		
Vertical start profile Used to start a vertical cladding run.	Not required	
End profile Hides any sharp corners and protects the Cedral edges from wear and tear.		
Connection profile End trim to finish Cedral when used as a single piece on a window reveal or soffit.		
Perforated closure Used to protect against pest infestation and debris. Galvanized finish 2.5m length.		
Window lintel profile Used to finish above the window and to support next course of Cedral Click.	Not required	

CEDRAL BOARD

Cedral Board is an impact resistant, durable and flat board, ideal for soffits and fascias. Cedral Board is available in 9 colours and in the following sizes: 2500mm x 200mm, 300mm, 400mm and 1220mm.



- ✓ low maintenance
- ✓ factory applied colour
- ✓ easy to install



low maintenance
factory applied colour
easy to install



Cedral suits every style

Cedral is ideal as an over-clad solution for existing properties, or as part of a new build facade. Available in a wide selection of factory applied colours, enabling homeowners and architects to create striking, individual homes, which are low maintenance.

Easy to install


Cedral needs to be fixed to timber battens of at least 50mm wide and spaced at a maximum of 600mm. Cedral should be fixed to at least three battens and must have a minimum 30mm clear cavity behind it.

Smart accessories

Cedral has a range of complementary profiles and accessories, making it easy to work around details. All profiles are quick to install and make sure your facade is nicely finished.



- [Request your free sample](#)
- [Download the Cedral fixing guide](#)
- [Find your nearest stockist](#)



For your
free sample, visit:
www.cedral.co.uk





- ✓ *low maintenance*

- ✓ *factory applied colour*

- ✓ *easy to install*