


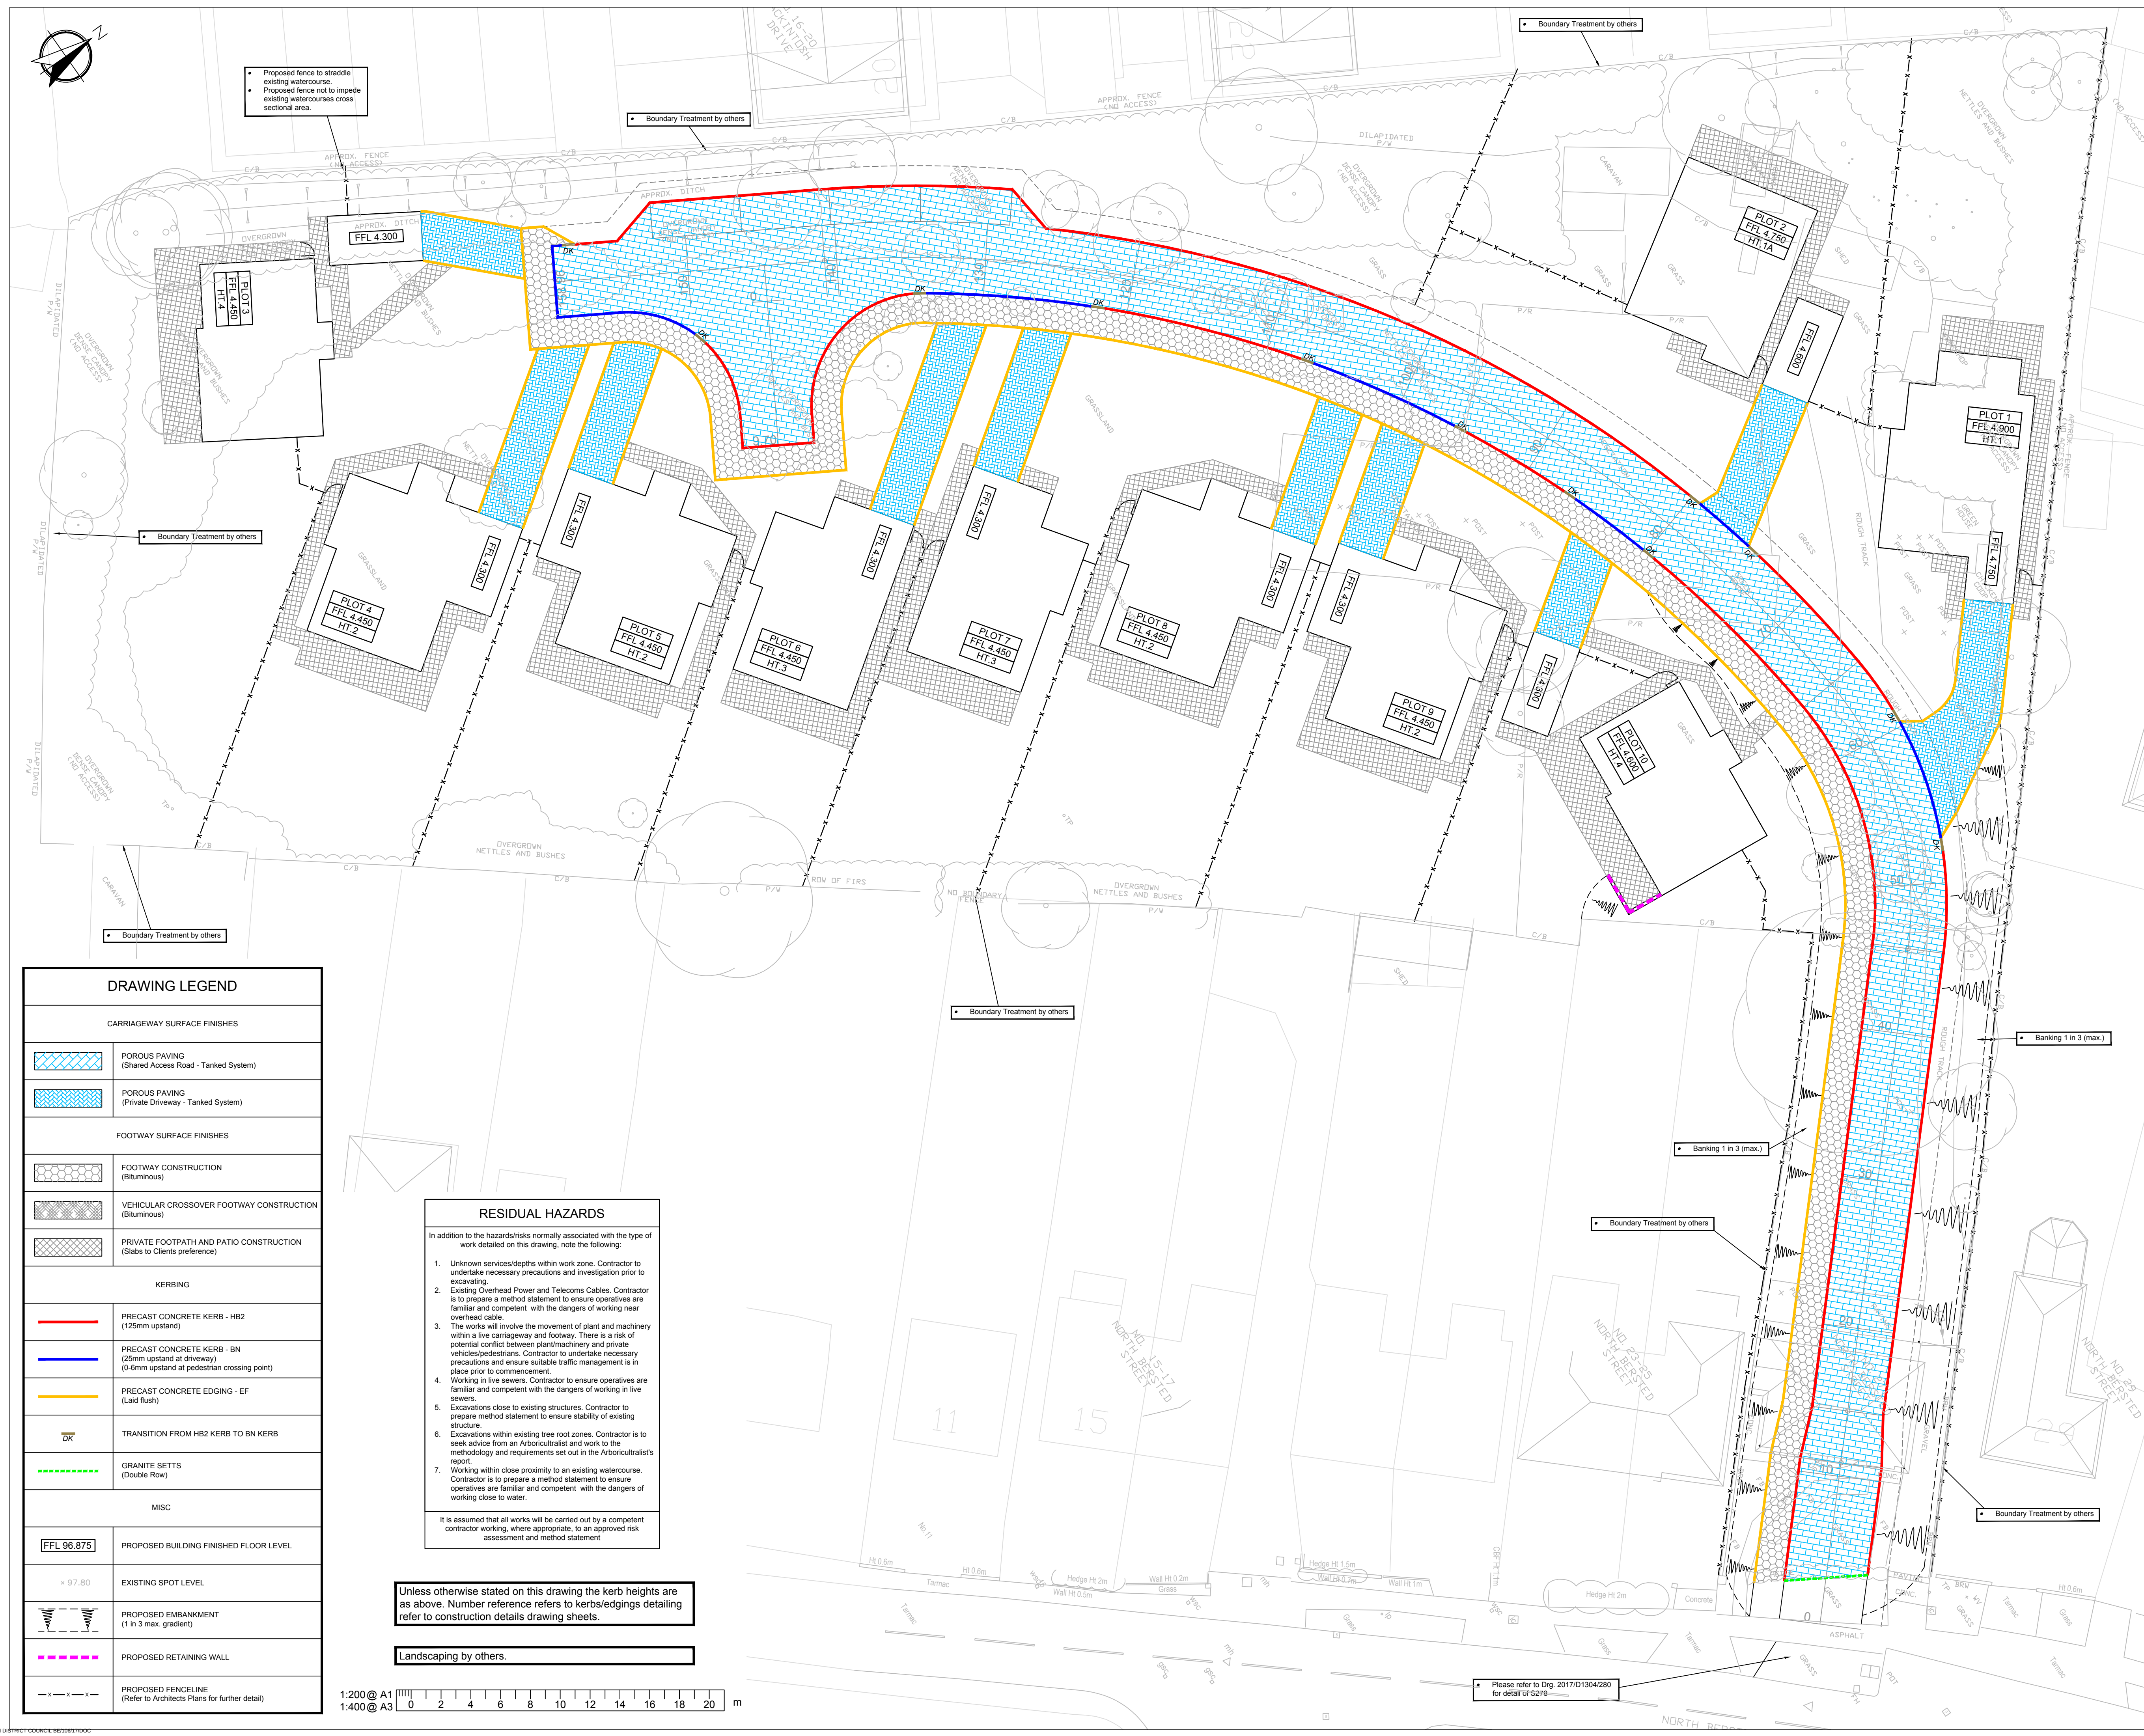


DRAWING LEGEND	
CARRIAGEWAY SURFACE FINISHES	
	POROUS PAVING (Shared Access Road - Tanked System)
	POROUS PAVING (Private Driveway - Tanked System)
FOOTWAY SURFACE FINISHES	
	FOOTWAY CONSTRUCTION (Bituminous)
	VEHICULAR CROSSOVER FOOTWAY CONSTRUCTION (Bituminous)
	PRIVATE FOOTPATH AND PATIO CONSTRUCTION (Slabs to Clients preference)
KERBING	
	PRECAST CONCRETE KERB - HB2 (125mm upstand)
	PRECAST CONCRETE KERB - BN (25mm upstand at driveway) (0-6mm upstand at pedestrian crossing point)
	PRECAST CONCRETE EDGING - EF (Laid flush)
	TRANSITION FROM HB2 KERB TO BN KERB
	GRANITE SETTS (Double Row)
MISC	
	PROPOSED BUILDING FINISHED FLOOR LEVEL
	EXISTING SPOT LEVEL
	PROPOSED EMBANKMENT (1 in 3 max. gradient)
	PROPOSED RETAINING WALL
	PROPOSED FENCELINE (Refer to Architects Plans for further detail)

RESIDUAL HAZARDS
In addition to the hazards/risks normally associated with the type of work detailed on this drawing, note the following:
1. Unknown services/depths within work zone. Contractor to undertake necessary precautions and investigation prior to excavating.
2. Existing Overhead Power and Telecoms Cables. Contractor is to prepare a method statement to ensure operatives are familiar and competent with the dangers of working near overhead cable.
3. The works will involve the movement of plant and machinery within a live carriageway and footway. There is a risk of potential conflict between plant/machinery and private vehicles/pedestrians. Contractor to undertake necessary precautions and ensure suitable traffic management is in place prior to commencement.
4. Working in live sewers. Contractor to ensure operatives are familiar and competent with the dangers of working in live sewers.
5. Excavations close to existing structures. Contractor to prepare method statement to ensure stability of existing structure.
6. Excavations within existing tree root zones. Contractor is to seek advice from an Arboriculturist and work to the methodology and requirements set out in the Arboriculturist's report.
7. Working within close proximity to an existing watercourse. Contractor is to prepare a method statement to ensure operatives are familiar and competent with the dangers of working close to water.
It is assumed that all works will be carried out by a competent contractor working, where appropriate, to an approved risk assessment and method statement

Unless otherwise stated on this drawing the kerb heights are as above. Number reference refers to kerbs/edgings detailing refer to construction details drawing sheets.

Landscaping by others.



NOTES

1. This drawing is to be read in conjunction with all other RGP drawings, and with all relevant Architect's and Engineer's drawings and specification. Any discrepancies found are to be reported immediately to the Engineer.

2. RGP accepts no responsibility for inaccuracies in data provided by third parties such as topographic surveys or Ordnance Survey mapping.

3. Do not scale, work to figured dimensions only. All dimensions are in millimetres unless noted otherwise and all levels are in metres from the topographic survey datum.

4. Any information given regarding existing underground services is given in good faith after consultation with the relevant authority, however accuracy is not certain. The main contractor is responsible for checking all information on site prior to work commencing and taking due care whilst undertaking the works.

5. All dimensions to be checked on site. All details and dimensions relating to sub-contractors work must be checked and agreed between the sub-contractor or supplier and the general contractor.

6. The electronic information from this drawing can not be guaranteed as dimensionally drawn exact. Figured dimensions must be used for setting out and detailing. RGP logos and company information must be removed from copies if information is re-used.

7. The main contractor is responsible for the design of all temporary works, and is also responsible for the safe maintenance and stability of existing buildings at all times.

8. The main contractor is responsible for dealing with all occurrences of ground water during the construction period.

9. The contractor must comply with all current legislation relating to health & safety.

10. All products specified shall be installed in strict accordance with the manufacturers recommendations and instructions. If there are discrepancies between that information and the details on any RGP drawings, the manufacturers instructions must be used.

SUPPORTING DRAWINGS:

Dwg No.	Dwg Title:
201	Drainage & Levels Layout
211	Setting Out
250	Drainage Details Sht 1
251	Drainage Details Sht 2
260	Construction Details
280	S278 Layout and Details

PRELIMINARY

Rev.	Date	Amendments	Drawn	Appr.

Transport Planning and Infrastructure Design Consultants

Metro House, Northgate, Chichester, West Sussex, PO19 1BE

Tel: 01243 410418 Fax: 01483 861682 www.rgp.co.uk

Client

Knightsgate Ltd

Project

North Bertsted, Bognor
West Sussex, PO22 9AA

Drawing Title

Surface Finishes

Scale	Drawn By	Checked By	Approved By
1:200 @ A1	LG	MJA	MJA
Date	Drawing No.		Rev.
July 2017	2017/D1304/221		-

ARUN DISTRICT COUNCIL REF:106157.DOC