




Good Morning Nigel,

You will see from below that the highway officer wants to be sure that you had forwarded our email responses (plus attachments) of 23rd and 26th November to the planning officer so that she can formally reconsulted.


Can you confirm that you have done this as promised?

Happy to discuss

Kind regards,
Dave

Dave Tighe

Highgate Transportation



www.highgatetransportation.co.uk

*Highgate Transportation Ltd,
First Floor, 43-45 Park Street
BRISTOL BS1 5NL
Company Registration Number: 07500534*

This message (including any attachments) is confidential and intended for the addressee only. The material in it may also be subject to copyright protection. If you are not the addressee you are notified that any use, review, disclosure, or copying of the information in it is prohibited. If you have received this message in error please notify us and delete any copies of it. Whilst we take sensible precautions we cannot guarantee that this message or any attachments are virus free.

Please consider the environment before printing this email and any attachments.

Thanks Brad

All this info and attachments and info sent last week should be sent to Arun District Council as the deciding authority. They will then formally re-consult us. I've copied the case officer in but you may wish to contact him separately to ensure receipt of additional info

Kind regards

Miss Katie Kurek | BA (Hons) MCIHT | Assistant Planner

County Highways Team – Planning Services - Economy, Planning and Place Directorate

West Sussex County Council

Location: Ground Floor Northleigh, County Hall, Chichester, PO19 1RH

Contact: Internal: 25730 External: 0330 222 5730 E-mail: katie.kurek@westsussex.gov.uk

Dear Katie,

Further to my email of the 22nd November 2019 which provided an initial response to some of your comments raised in your 21st November 2019 consultation response regarding Land East of Shripney Road. By way of summary that email provided:

- Updated access proposals including visibility splays as a result of the RSA recommendations.
- Updated swept path analysis for the modified access proposals.
- The Stage 1 RSA and Designer's Response.
- Raw ATC and MCC data.

With regards to the other comments you raised, our response is as follows.

- 1.You commented that the Architect's masterplan appeared to show a Zebra crossing of the A29. Unfortunately, this reflected how the Architect presented a pedestrian crossing location. We can confirm that there is no proposal to provide a Zebra crossing as part of the application proposals. We apologise for any confusion.
- 2.Your concerns regarding pedestrian desire lines and the non-continuous footway along the eastern side of Shripney Road to the south are noted. We have now added a dropped kerb pedestrian crossing of the A29 just after the start of the dual carriageway section as suggested. This is shown on drawing HTp/1845/05/B attached.
- 3.We have explored the possibility improving the crossing facilities of Shripney Lane. With the two proposed crossings of the A29 and the pedestrian desire lines, future residents of the site will not be reliant on an improved crossing at the Shripney Lane junction and therefore we are not proposing any crossing improvements at this location.
- 4.At an early stage we got our planning consultants to confirm that there were no specific committed developments that wouldn't have already been accounted for within TEMPRO. Also we are aware for the future proposals to divert the A29 away from Shripney Road. In any event, the updated PICADY assessment (see below) has identified that the site access junction will operate well within capacity and as such, Shripney Road passing the site could accommodate significantly more traffic before the access approaches capacity.
- 5.Following your comment regarding right turn modelling in the PICADY model, we have updated and rerun to take account of your comment (report attached). A blocking queue of 6.0 PCUs has been used which accords with a right turn queue capacity of circa 35 metres (6 PCUs). Again, you will note that the junction operates well within capacity.
- 6.The development traffic was previously split 50/50 north/south along the A29. Following your comment this has now been changed to be split based on the percentage split in north/south traffic along the A29. As requested, flow diagrams for the site access junction are attached to this email. For your information during the AM peak hour 53% of traffic is northbound (with 47% southbound) and during the PM peak hour 39% of traffic is northbound and 61% is southbound.
- 7.You expressed a preference to widening the junction radii to 9.0 metres. You will note that as a result of the RSA, the bellmouth was widened and the southern radius increased to 12.0 metres for swept path analysis of large vehicles. Do you still think it is necessary to increase the northern radius to 9.0 metres?

We trust that this is information if helpful and will enable you to confirm that the proposals are acceptable.


Please do not hesitate to contact us with any comments or queries that you may have.

Kind Regards,

Brad

Brad Loxley

Highgate Transportation



Highgate Transportation Ltd


First Floor, 43-45 Park Street

BRISTOL BS1 5NL

Company Registration Number: 07500534

This message (including any attachments) is confidential and intended for the addressee only. The material in it may also be subject to copyright protection. If you are not the addressee you are notified that any use, review, disclosure, or copying of the information in it is prohibited. If you have received this message in error please notify us and delete any copies of it. Whilst we take sensible precautions we cannot guarantee that this message or any attachments are virus free.

Please consider the environment before printing this email and any attachments.



Dear Katie,

We have been provided with your consultation response dated 21st November 2019 in respect of the above. This is attached for ease of reference.

We will go through the points you raised carefully and respond fully next week. However, we have prepared a Stage 1 RSA and Designer's Response which is with our planning consultant to circulate. Please find this attached.

You will note that the Designer's Response has resulted in modification to the site access junction, i.e. widening the bellmouth and increase in the southern kerb radius. Please find this shown on drawing HTP/1845/05/A attached. This plan also shows the visibility splays, please let us know if this is unclear. We also attach Swept Path Analysis plan HTP/1845/TR04/A of a refuse collection vehicle using this modified site access. Again, please let us know if this appears unclear.

We have also attached the ATC and MCC traffic survey data.

We hope that you will find this information helpful and as highlighted above, we will provide our full response next week.


Should you have any questions in the meantime, then please do not hesitate to contact us.

Kind Regards,

Brad

Brad Loxley

Highgate Transportation

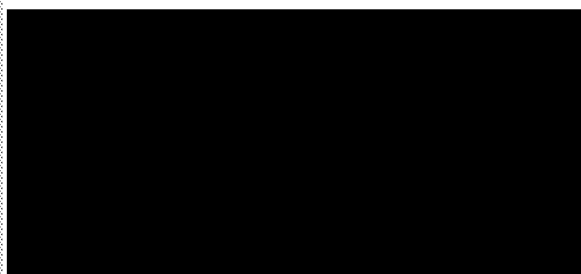

Highgate Transportation Ltd

First Floor, 43-45 Park Street

BRISTOL BS1 5NL

Company Registration Number: 07500534

This message (including any attachments) is confidential and intended for the addressee only. The material in it may also be subject to copyright protection. If you are not the addressee you are notified that any use, review, disclosure, or copying of the information in it is prohibited. If you have received this message in error please notify us and delete any copies of it. Whilst we take sensible precautions we cannot guarantee that this message or any attachments are virus free.

Please consider the environment before printing this email and any attachments.

This email and any attachments are confidential and intended solely for the persons addressed. If it has come to you in error please reply to advise us but you should not read it, copy it, show it to anyone else nor make any other use of its content. West Sussex County Council takes steps to ensure emails and attachments are virus-free but you should carry out your own checks before opening any attachment.