

# **Energy Statement**

**Land West of New Barn Lane**

**Linden Homes South**

August 2017



|              | Name            | Date     | E-mail address              |
|--------------|-----------------|----------|-----------------------------|
| Produced By: | Fraser Browning | 16.08.17 | Fraser.Browning@aessc.co.uk |
| Reviewed By: | Andrew McManus  | 17.08.17 | Andrew.McManus@aessc.co.uk  |

| Revision | Note                     | Issue Date |
|----------|--------------------------|------------|
| 0        | Initial issue            | 17.08.2017 |
| 1        | Inclusion of PV schedule | 23.08.2017 |


This Statement has been commissioned by Linden Homes South to detail the proposed approach to sustainable construction to be employed at the site at Land West of New Barn Lane. It should be noted that the details presented, including the proposed specifications, are subject to change as the detailed design of the dwellings progresses, whilst ensuring that the overall commitments will be achieved.

## Contents

|   |                                               |    |
|---|-----------------------------------------------|----|
| 1 | Introduction .....                            | 4  |
| 2 | Planning Policy .....                         | 5  |
| 3 | Baseline Energy Performance .....             | 6  |
| 4 | Energy Reduction Strategy.....                | 7  |
| 5 | Low Carbon and Renewable Energy Systems ..... | 11 |
| 6 | Overall Energy Reduction Achieved.....        | 15 |
| 7 | Conclusions .....                             | 16 |
| 8 | Appendices.....                               | 17 |

## List of figures & tables

|                                                                          |    |
|--------------------------------------------------------------------------|----|
| Table 1. Part L Compliant emissions and fabric efficiency.....           | 6  |
| Figure 1. The Energy Hierarchy .....                                     | 7  |
| Table 2. Benefits of following the Fabric First approach .....           | 8  |
| Table 3. Construction specification – major elements .....               | 8  |
| Table 4. Site-wide emissions after energy demand reduction .....         | 10 |
| Table 5. Site wide Fabric Energy Efficiency of proposed development..... | 10 |
| Table 6. Reduction in energy demand .....                                | 10 |
| Table 7. Biomass Heating feasibility appraisal.....                      | 12 |
| Table 8. Solar Thermal systems feasibility appraisal .....               | 13 |
| Table 9. Solar Photovoltaic systems feasibility appraisal .....          | 13 |
| Table 10. Overall Energy Reduction Achieved .....                        | 15 |
| Table 11. Overall Energy Reduction Achieved .....                        | 15 |



# 1 Introduction

## Preface

- 1.1 Written by AES Sustainability Consultants Limited on behalf of Linden Homes South, this strategy has been prepared for the development of 90 dwellings at Land West of New Barn Lane to address local planning policy and conditions relating to sustainable construction.

## Purpose and Scope of the Statement

- 1.2 The purpose of this statement is to serve as evidence that Condition 20 set out in outline planning consent BE/18/17/PL is addressed by the proposed approach.
- 1.3 The statement therefore demonstrates that 10% of the energy demand of the development shall be secured from decentralised and renewable or low carbon energy sources or equivalent fabric first standards are incorporated that would secure a 10% reduction in energy use.

## Development Description

- 1.4 The proposed development is located west of Newbarn Lane, North Bersted and comprises 90 dwellings where 30% are to be designated as affordable.

Outline planning consent was granted in May 2017 under reference BE/18/17/PL, subject to attached conditions, where condition 20 addresses sustainability and energy demand reduction.



## 2 Planning Policy

### Planning Conditions

- 2.1 This statement aims to address Condition 20 of outline planning consent granted under reference BE/18/17/PL:

**Condition 20**

At least 10% of the energy supply of the development shall be secured from decentralised and renewable or low-carbon energy sources or equivalent fabric first standards that would secure a 10% reduction in energy use. Details and a timetable of how this is to be achieved, including details of physical works on site, shall be submitted to and approved in writing by the local planning authority [as part of the reserved matters submissions required by condition 2]. The approved details shall be implemented in accordance with the approved timetable and retained as operational thereafter, unless otherwise agreed in writing by the local planning authority.

**Reason:**

In order to seek to achieve high levels of energy efficiency in accordance with the aims of the NPPF.

### 3 Baseline Energy Performance

- 3.1 Sustainability measures are assessed under Part L of Building Regulations through a baseline Target Emissions Rate (TER – expressed in kilograms CO<sub>2</sub> per meter squared of total useful floor area per annum) and a baseline Target Fabric Energy Efficiency (TFEE – expressed in kWh per meter squared per annum).
- 3.2 The baseline energy demand for the compliant development can be obtained alongside the SAP calculation. The baseline TER, TFEE and total energy demand for the proposed development are summarised in Table 1.

**Table 1. Part L Compliant emissions and fabric efficiency**

|                                                                | Land West of New Barn Lane Baseline          |
|----------------------------------------------------------------|----------------------------------------------|
| <b>Annual site emissions – Part L compliant</b>                | 139,657 kgCO <sub>2</sub> /yr/m <sup>2</sup> |
| <b>Annual site fabric energy efficiency – Part L compliant</b> | 408,497 kWh/m <sup>2</sup> /yr               |
| <b>Total annual energy demand for Part L compliance</b>        | 589,582 kWh/yr                               |

- 3.3 The strategy for reducing this demand in line with Condition 20 is outlined within this statement.

## 4 Energy Reduction Strategy

- 4.1 The energy hierarchy should be applied whenever carbon emissions and energy demand are targeted to be reduced.
- 4.2 It is proposed that the energy reduction strategy for the development incorporates further improvements beyond a Part L compliant specification and initially concentrates finance and efforts on reducing energy demand as the first stage of the Energy Hierarchy (Figure 1).

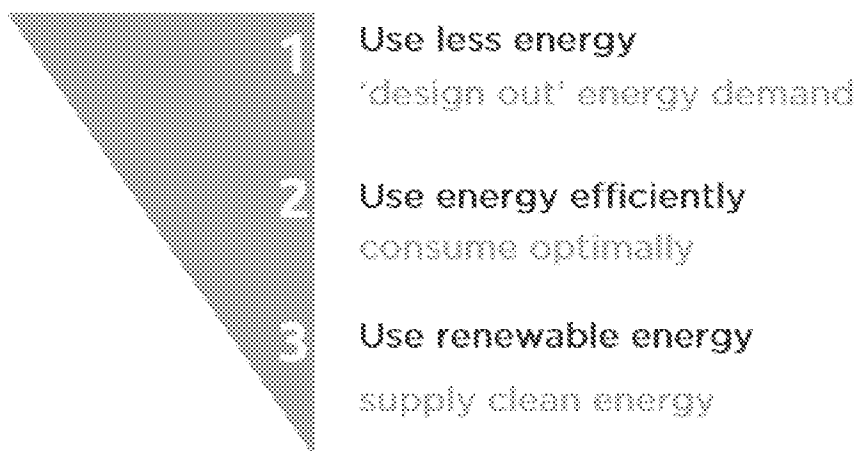


**Figure 1. The Energy Hierarchy**

- 4.3 As this hierarchy demonstrates, designing out energy use is weighted more highly than the generation of low-carbon or renewable energy to offset unnecessary demand. Applied to the development of new housing, this approach is referred to as 'fabric first' and concentrates finance and efforts on improving U-values, reducing thermal bridging, improving airtightness, and installing energy efficient ventilation and heating services.
- 4.4 This approach has been widely supported by industry and government for some time, with the Zero Carbon Hub<sup>1</sup> and Energy Saving Trust<sup>2</sup> having both stressed the importance of prioritising energy demand as a key factor in delivering resilient, low energy homes.

---

<sup>1</sup> Zero Carbon Hub, Zero Carbon Strategies for tomorrow's new homes, Feb 2013.

<sup>2</sup> Energy Saving Trust, Fabric first: Focus on fabric and services improvements to increase energy performance in new homes, 2010

- 4.5 The benefits to prospective homeowners of following the Fabric First approach are summarised in Table 2.

**Table 2. Benefits of following the Fabric First approach**

|                                                                    | Fabric energy efficiency measures | Boil-on renewable energy technologies |
|--------------------------------------------------------------------|-----------------------------------|---------------------------------------|
| Energy/CO <sub>2</sub> /fuel bill savings applied to all dwellings | ✓                                 | ×                                     |
| Savings built-in for life of dwelling                              | ✓                                 | ×                                     |
| Highly cost-effective                                              | ✓                                 | ×                                     |
| Increases thermal comfort                                          | ✓                                 | ×                                     |
| Potential to promote energy conservation                           | ✓                                 | ✓                                     |
| Minimal ongoing maintenance / replacement costs                    | ✓                                 | ×                                     |
| Significant disruption to retrofit post occupation                 | ✓                                 | ×                                     |

- 4.6 The decoupling of energy use from CO<sub>2</sub> emissions through the inclusion of the 'target fabric energy efficiency' (TFEE) within SAP in 2013 serves as an acknowledgment of the importance of reducing demand, rather than offsetting carbon emissions through low carbon and renewable energy technologies.

### Improved fabric specification

- 4.7 In order to ensure that the energy demand of the development is reduced, the dwellings will be designed to minimise heat loss through the fabric wherever possible. Table 3 details the design fabric specification of the major building elements, with the first column in this table setting out the Part L1A limiting fabric parameters in order to demonstrate the improvements that have been made.

**Table 3. Construction specification – major elements**

|                                | Part L1a Limiting Fabric Parameters          | Design Specification                           |
|--------------------------------|----------------------------------------------|------------------------------------------------|
| <b>External wall – u-value</b> | 0.30 W/m <sup>2</sup> K                      | 0.24 W/m <sup>2</sup> K                        |
| <b>Party wall – u-value</b>    | 0.20 W/m <sup>2</sup> K                      | 0.00 W/m <sup>2</sup> K                        |
| <b>Plane roof – u-value</b>    | 0.20 W/m <sup>2</sup> K                      | 0.11 W/m <sup>2</sup> K                        |
| <b>Ground floor – u-value</b>  | 0.25 W/m <sup>2</sup> K                      | ≤ 0.14 W/m <sup>2</sup> K                      |
| <b>Windows – u-value</b>       | 2.00 W/m <sup>2</sup> K                      | 1.4W/m <sup>2</sup> K                          |
| <b>Doors – u-value</b>         | 2.00 W/m <sup>2</sup> K                      | 1.3 W/m <sup>2</sup> K                         |
| <b>Air Permeability</b>        | 10 m <sup>3</sup> /h.m <sup>2</sup> at 50 Pa | 5.00 m <sup>3</sup> /h.m <sup>2</sup> at 50 Pa |

## **Thermal Bridging**

- 4.8 The significance of thermal bridging as a potential major source of fabric heat losses is increasingly understood. Improving the U-values for the main building fabric without accurately addressing the thermal bridging will not achieve the desired energy and CO<sub>2</sub> reduction targets.
- 4.9 The specification as proposed minimises unnecessary bridging of the insulation layers, with avoidable heat loss therefore being reduced wherever possible. Accurate calculation of these heat losses forms an integral part of the SAP calculations undertaken to establish energy demand of the dwellings, and as such thermal modelling has been undertaken to assess the performance of all main building junctions. The average total Y Value has been assessed as 0.060, against a SAP default figure of 0.150.

## **Air Leakage**

- 4.10 After conductive heat losses through building elements are reduced, convective losses through draughts are the next major source of energy wastage. The proposal adopts an airtightness standard of 5.00 m<sup>3</sup>/m<sup>2</sup>@50Pa, a significant enhancement on Part L1A minimum requirements. Pressure testing of all dwellings on completion will be undertaken to confirm that the design figure has been met.

## **Passive design measures and overheating risk mitigation**

- 4.11 In order to further reduce energy demand, where practical dwellings have been designed with regard to the principles of passive design, including consideration of building orientation and site placement to maximise the potential for solar gain.
- 4.12 Within the development layout, orientation and massing will be designed to maximise (within reason) passive solar gain. Glazing will be specified with a solar transmittance value (g-value) to strike the balance between useful solar gain in the winter and unwanted solar gain in the summer.
- 4.13 Heat generation and distribution systems will be designed to give the occupants a high level of control over their use, encouraging and allowing energy-efficient behaviour. Time and temperature zone controls will be included with fully insulated primary pipework being installed throughout.
- 4.14 Due to these measures to reduce internal heat gain, natural ventilation provided through window openings and the opportunity for cross ventilation will allow sufficient air exchange rates to purge any heat build-up. Active cooling systems are therefore not proposed.
- 4.15 These measures will serve to ensure that the development builds in resilience to a potentially changing climate over the lifetime of the buildings and minimises the overheating risk that can be exacerbated by the drive to build better insulated, more airtight homes if not considered within the design and construction process.

## **As-designed performance**

- 4.16 By following the strategy described, the dwellings will reduce energy demand and consequent CO<sub>2</sub> emissions beyond the level of a Part L compliant development. The CO<sub>2</sub> emissions arising from the development after demand reduction measures have been taken into account are shown in Table 4.



**Table 4. Site-wide emissions after energy demand reduction**

|                                                     | (kgCO <sub>2</sub> /year) |      |
|-----------------------------------------------------|---------------------------|------|
| <b>Annual site emissions – Part L compliant</b>     | 139,657                   |      |
| <b>Annual site emissions – as designed</b>          | 131,677                   |      |
|                                                     | (kgCO <sub>2</sub> /year) | %    |
| <b>CO<sub>2</sub> savings from demand reduction</b> | 7,980                     | 5.71 |

- 4.17 This approach also benefits the fabric energy efficiency of the development. Table 5 outlines the significant improvement over the standard required for building regulations compliance achieved by following this strategy.

**Table 5. Site wide Fabric Energy Efficiency of proposed development**

|                                                           | kWh/year/m <sup>2</sup> |       |
|-----------------------------------------------------------|-------------------------|-------|
| <b>Site-wide Target Fabric Energy Efficiency (TFEE)</b>   | 54.02                   |       |
| <b>Site-wide Dwelling Fabric Energy Efficiency (DFEE)</b> | 48.34                   |       |
|                                                           | kWh/m <sup>2</sup> /yr  | %     |
| <b>Saving from demand reduction</b>                       | 5.68                    | 10.52 |

- 4.18 Condition 20 of the planning approval requires a 10% reduction in energy demand. The demand reduction measures which have been prioritised in accordance with the energy hierarchy approach to sustainable construction to deliver approximately 7.7% of the required demand reduction, and shown in Table 6.

**Table 6. Reduction in energy demand**

|                                          | kWh/yr  |      |
|------------------------------------------|---------|------|
| <b>Site-wide Compliant Energy Demand</b> | 589,582 |      |
| <b>Site-wide Proposed Energy Demand</b>  | 543,949 |      |
|                                          | kWh/yr  | %    |
| <b>Saving from demand reduction</b>      | 45,633  | 7.74 |

## 5 Low Carbon and Renewable Energy Systems

- 5.1 Condition 20 of outline planning consent BE/18/17/PL requires a 10% reduction in energy demand, or at least 10% of the energy demand to be supplied through low carbon or renewable solutions.
- 5.2 A 7.74% reduction is achieved through improved fabric measures. This strategy proposes the remaining 2.26% for the requirement is met through low carbon and renewable energy systems.
- 5.3 A full range of low carbon and renewable energy systems have been assessed for their potential to deliver suitable emission savings, outlined below.

### Combined Heat and Power (CHP) and District Energy Networks

- 5.4 A CHP unit is capable of generating heat and electricity from a single fuel source. The electricity generated by the CHP unit used to displace electricity that would otherwise be supplied from the national grid, with the heat generated as a by-product utilised for space and water heating.
- 5.5 There are no suitable heating networks in the vicinity, and the economic and technical viability of a CHP system is largely reliant on a consistent demand for heat throughout the day to ensure that it operates for over 5000 hours per year. Heat demand from residential schemes is not conducive to efficient system operation, with a defined heating season and intermittent daily profile, with peaks in the morning and the evening. Further to this, the low heat density and the small-scale nature of the development lead to the conclusion that a CHP system is not considered feasible for this development.

### Wind Power

- 5.6 A preliminary examination of the BERR wind speed database indicates that average wind speeds at 10m above ground level are around 5.0m/s<sup>3</sup>. Wind turbines at this site are therefore unlikely to generate sufficient quantities of electrical energy to be cost effective<sup>4</sup>.
- 5.7 Locating wind turbines adjacent to areas with buildings presents a number of potential obstacles to deployment. These include the area of land onsite required for effective operation, installation and maintenance access, environmental impact from noise and vibration, visual impact on landscape amenity and potential turbulence caused by adjacent obstacles. For these reasons wind power is not considered feasible.

### Building Scale Systems

- 5.8 The remaining renewable or low carbon energy systems considered potentially feasible are at a building scale. These are as follows;
- Individual biomass heating
  - Solar thermal
  - Solar photo-voltaic (PV)
- 5.9 The advantages and disadvantages of these technologies are evaluated in Tables 7-9.

---

<sup>3</sup> NOABL Wind Map (<http://www.rensmart.com/Weather/BERR>)

<sup>4</sup> CIBSE TM38:2006. Renewable energy sources for buildings.

**Table 7. Biomass Heating feasibility appraisal**

| Biomass Heating                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Potential Advantages                                                                                                                                                                                                                                 | Risks & Disadvantages                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <ul style="list-style-type: none"> <li>• Potential to significantly reduce CO<sub>2</sub> emissions as the majority of space and water heating will be supplied by a renewable fuel</li> <li>• Decreased dependence on fossil fuel supply</li> </ul> | <ul style="list-style-type: none"> <li>• A local fuel supply is required to avoid increased transport emissions</li> <li>• Fuel delivery, management and security of supply are critical</li> <li>• Space is required to store fuel, a thermal store and plant</li> <li>• A maintenance regime would be required even though modern systems are relatively low maintenance</li> <li>• Building users or a management company must be able to ensure fuel is supplied to the boiler as required. This may have a negative impact on marketing of buildings</li> <li>• Local environmental impacts potentially include increased NO<sub>x</sub> and particulate emissions</li> </ul> |
| Conclusions                                                                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <p>Biomass heating is considered technically feasible in large dwellings provided sufficient space can be accommodated for fuel supply, delivery and management. It is not considered feasible in smaller houses or apartments.</p>                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

**Table 8. Solar Thermal systems feasibility appraisal**

| Solar Thermal                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Potential Advantages                                                                                                                                                                                                                                                                       | Risks & Disadvantages                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>• Mature and reliable technology offsetting the fuel required for heating water (typically gas)</li> <li>• Solar thermal systems require relatively low maintenance</li> <li>• ~50% of hot water demand in dwellings can be met annually</li> </ul> | <ul style="list-style-type: none"> <li>• Installation is restricted to favourable orientations on an individual building basis</li> <li>• The benefit of installation is limited to the water heating demand of the building</li> <li>• Safe access must be considered for maintenance and service checks</li> <li>• Buildings need to be able to accommodate a large solar hot water cylinder</li> <li>• Distribution losses can be high if long runs of hot water pipes are required</li> <li>• Visual impact may be a concern in special landscape designations (e.g. AONB)</li> </ul> |
| Conclusions                                                                                                                                                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <p><b>Solar thermal systems are considered technically feasible on all buildings with suitable roof orientations and space to accommodate hot water cylinders.</b></p>                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

**Table 9. Solar Photovoltaic systems feasibility appraisal**

| Solar Photovoltaic (PV)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Potential Advantages                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Risks & Disadvantages                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <ul style="list-style-type: none"> <li>• The technology offsets the high carbon content of grid supplied electricity used for lighting, pumps and fans, appliances and equipment</li> <li>• Mature and well proven technology that is relatively easily integrated into building fabric</li> <li>• Solar resource is not limited by energy loads of the dwelling as any excess generation can be transferred to the national grid</li> <li>• PV systems generally require very little maintenance</li> <li>• Occupiers could benefit from Feed in Tariff payments</li> </ul> | <ul style="list-style-type: none"> <li>• Poor design and installation can lead to lower than expected yields (e.g. from shaded locations)</li> <li>• Installation is restricted to favourable orientations</li> <li>• Occupiers may not benefit from Feed in Tariff payments where the contract is held by a landlord</li> <li>• Safe access must be considered for maintenance and service checks</li> <li>• Visual impact may be a concern in special landscape designations (e.g. AONB)</li> <li>• Reflected light may be a concern in some locations</li> </ul> |
| Conclusions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <p><b>PV panels are considered technically feasible for all buildings with suitable roof orientations.</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## Summary

- 5.10 Air source and ground source heat pumps have not been considered in detail for this scheme - whilst they are highly efficient, both technologies rely on grid-sourced electricity and therefore potentially increase the CO<sub>2</sub> emissions associated with the development.
- 5.11 Following the appraisal of renewable and low carbon technologies the following technologies are considered to be technically feasible to some of the plots on this scheme;
- Biomass heating to the larger houses that have space to store fuel and a thermal store.
  - Solar thermal collectors to the houses that have space to incorporate a hot water cylinder and have suitable roof orientations.
  - Solar photovoltaic panels to the dwellings that have suitable roof orientations.

## Proposed renewable energy systems

- 5.12 The total energy demand in a Building Regulations compliant scenario is calculated at 589,582kWh, where a 7.74% reduction is achieved through a fabric first approach for the proposed development. It is proposed that solar photovoltaic (PV) systems are installed to deliver the remaining 13,500kWh/yr required to meet the 10% requirement set out in Condition 20 of outline planning consent BE/18/17/PL.

## PV Distribution

- 5.13 The PV panels will be distributed to take advantage of favourable pitch and orientation where feasible, and grouped into cost-effective system sizes to ensure that the capital outlay for the systems is biased towards the energy-producing element – i.e. the panels themselves – rather than the balance of system components. This will additionally ensure that any ongoing maintenance requirements, including replacing the inverters during the working life of the panels, is minimised.
- 5.14 An example distribution schedule developed in conjunction with a specialist PV designer is included in Appendix A evidencing how an output of 13,721kWh can be achieved to exceed the requirement. A site plan is included in Appendix B to reference plots included in the PV schedule.

## 6 Overall Energy Reduction Achieved

- 6.1 Combining an improved fabric specification with renewable technologies provides an overall energy reduction of 10.03% over that required for Building Regulations compliance, in line with the energy hierarchy outlined in this statement. Table 10 outlines the reductions achieved by taking this approach.

**Table 10. Overall Energy Reduction Achieved**

|                                            | kWh/yr        |              |
|--------------------------------------------|---------------|--------------|
| <b>Energy Demand – Part L Compliant</b>    | 589,582       |              |
| <b>Energy Demand – As Designed</b>         | 543,949       |              |
|                                            | kWh/yr        | %            |
| <b>Energy Demand Reduction</b>             | 45,633        | 7.74         |
| <b>Contribution required by renewables</b> | 13,500        | 2.29         |
| <b>Total achieved</b>                      | <b>59,133</b> | <b>10.03</b> |

- 6.2 Table 11 shows how this approach substantially reduces the site-wide CO<sub>2</sub> beyond those required for Part L compliance.

**Table 11. Overall Energy Reduction Achieved**

|                                                    | kgCO <sub>2</sub> /yr |              |
|----------------------------------------------------|-----------------------|--------------|
| <b>CO<sub>2</sub> Emissions – Part L Compliant</b> | 139,654               |              |
| <b>CO<sub>2</sub> Emissions – As Designed</b>      | 131,677               |              |
| <b>CO<sub>2</sub> Emissions after renewables</b>   | 124,670               |              |
|                                                    | kgCO <sub>2</sub> /yr | %            |
| <b>Reduction after fabric improvement</b>          | 7,977                 | 5.71         |
| <b>After renewables</b>                            | <b>14,984</b>         | <b>10.73</b> |

## 7 Conclusions

- 7.1 The statement has been prepared in support of the development at Land West of New Barn Lane.
- 7.2 The primary purpose of this statement is to address Condition 20 of outline planning consent BE/18/17/PL, granted in May 2017 relating to energy demand reduction and renewable energy systems.
- 7.3 This statement demonstrates that the development will incorporate a number of energy demand reduction measures in accordance with the energy hierarchy/fabric first approach to sustainable construction.
- 7.4 Improvements in insulation, a reduction in thermal bridging and unwanted air leakage paths and further passive design measures will ensure that energy demand and consequent CO<sub>2</sub> emissions are minimised, delivering an emissions reduction of 5.71% above the level required for Building Regulations compliance and an imported energy demand reduction of 59,133kWh equivalent to 10.03% of the baseline demand.
- 7.5 Solar photovoltaics constitutes the preferred renewable technology for this site, after a range were considered. A system capacity of at least 13,500kWh is required to comply with the 10% energy demand requirement conditioned for this development, when combined with the energy savings achieved through an improved fabric specification.
- 7.6 An example PV schedule has been designed by a specialist designer to evidence how the requirement can be met. The solution in this case demonstrates how 13,721kWh can be provided through PV.
- 7.7 The combined energy demand reduction measures and renewable energy systems proposed will deliver an overall saving of 10.03% across the proposed development.

## 8 Appendices

### Appendix A: Preliminary PV Schedule

| Plots        | kWp         | kk  | Type of house | System Size m2 | Roof Pitch | Degrees from South | kWh per year   | CO2kg/year  | Module Output | Number of modules |
|--------------|-------------|-----|---------------|----------------|------------|--------------------|----------------|-------------|---------------|-------------------|
| 85           | 3.85        | 888 | 402           | 23.1           | 48         | 45                 | 3388           | 1758        | 8.275         | 14                |
| 86           | 3.85        | 888 | 402           | 23.1           | 48         | 45                 | 3388           | 1758        | 8.275         | 14                |
| 87           | 3.85        | 902 | 402           | 23.1           | 48         | 35                 | 3472.7         | 1882        | 8.275         | 14                |
| 88           | 3.85        | 902 | 402           | 23.1           | 48         | 35                 | 3472.7         | 1882        | 8.275         | 14                |
| <b>Total</b> | <b>15.4</b> |     |               | <b>92.4</b>    |            |                    | <b>13721.4</b> | <b>7121</b> |               | <b>56</b>         |

13500

# Appendix B - Site Plan

