



standard columns stepped steel

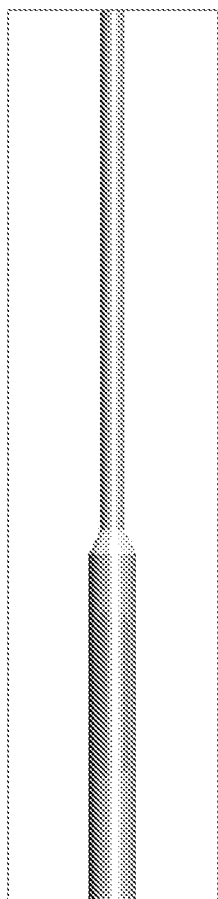

Holophane products that are suitable

CityMax
Denver Elite pole
Denver pole
D-Series
Estilo
Factor
Factor small
Petxina mini
Seattle medium
V-Max
Vista Grande
Vista junior

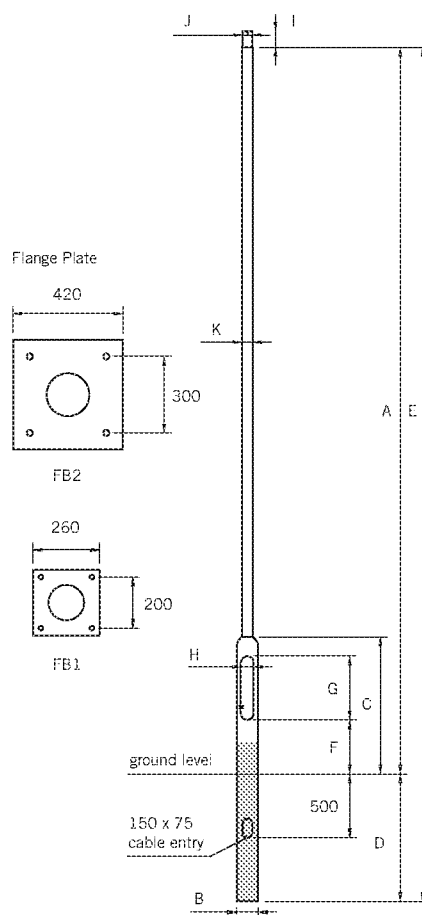

	Nominal Height	Base Diameter*	Base Height	Planting Depth	Overall Length	Door to Ground	Door Opening Length	Door Opening Width	Spigot Length*	Spigot Diameter*	Shaft Diameter*	Weight kg*	Bending Moment Nm
description	A	B	C	D	E	F	G	H	I	J	K		
2.5m standard duty	2500	140	1075	800	3300	400	500	100	-	-	76	27	2100
3m standard duty	3000	140	1075	800	3800	400	500	100	-	-	76	30	4666
3.5m standard duty	3500	140	1075	800	4300	400	500	100	-	-	76	32	2100
4m standard duty	4000	140	1075	800	4800	400	500	100	-	-	76	34	6484
4.5m standard duty	4500	140	1075	800	5300	400	500	100	-	-	76	37	5108
5m standard duty	5000	140	1075	800	5800	400	500	100	-	-	76	39	6149
5.5m standard duty	5500	140	1075	1000	6500	400	500	100	-	-	76	44	6003
6m standard duty	6000	140	1075	1000	7000	400	500	100	-	-	76	46	5999
6m heavy duty	5700	168	1200	1000	6700	400	600	115	130	76	89	71	10404
8m standard duty	7700	168	1200	1200	8900	400	600	115	130	76	89	89	10072
8m heavy duty	7700	168	1300	1200	9000	500	600	115	250	101	114	107	15699
8m extra heavy duty	7700	194	1300	1200	9000	500	600	115	250	127	140	135	18973
10m standard duty	9700	194	1300	1500	11200	500	600	115	250	101	114	150	18067
10m heavy duty	9700	194	1300	1500	11200	500	600	115	250	127	140	168	23193
10m extra heavy duty	9700	194	1300	1500	11200	500	600	115	250	152	168	220	28317
12m standard duty	11700	194	1300	1700	13400	500	600	115	250	127	140	213	26251
12m heavy duty	11700	194	1300	1700	13400	500	600	115	250	127	168	260	40390

* Exclusion TBC

2.5-6m std Poles	Flange Plate FB1	Bolts	M18 x 400
8-12m std Poles	Flange Plate FB2	Bolts	M24 x 820

Flange Plate and Anchor Bolt information will be confirmed at time of order due to the necessity in ensuring the correct plate and Anchor Bolts are supplied.

Column type to be confirmed at time of order as this is based on luminaire weight, windage and geographical location.

Anchor bolts

For foundation detail guidance refer to Holophane. For columns supplied with optional flange base Holophane offer three types of foundation bolts.

Note: The material used for the bolts is Fe E500 grade steel, with yield strength 500 N/mm² and minimum UTS 550 N/mm².

HEL.FS1 M18 Bolts (FS1) x 400 mm long

HEL.FS2 M24 Bolts (FS2) x 820 mm long

