


Key

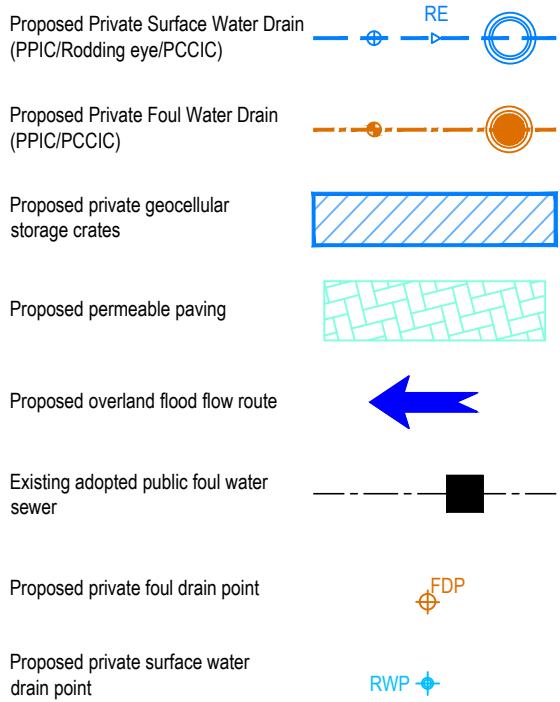

Drainage Strategy Notes:

1. Restricted discharge rate of 2.1 l/s based on 1-year greenfield runoff rate for total site area of 0.676Ha.
2. Proposed nett impermeable area 0.328Ha
3. Previous infiltration testing carried out on site by others yielded low results and near-surface ground water levels, as such, the use of soakways has been discounted.
4. Proposal to discharge surface water into existing highway drainage ditch at site boundary.
5. Line, level and condition of existing public sewers shown are subject to confirmation by CCTV drainage survey.

KEY PLAN

Construction Risks	Maintenance/cleaning Risks	Demolition/adaptation Risks
In addition to the hazards/risks normally associated with the type of works detailed on this drawing take note of the above. It is assumed that all works on this drawing will be carried out by a competent contractor working, where appropriate, to an appropriate method statement.		

SAFETY HEALTH AND ENVIRONMENTAL INFORMATION BOX

NOTES

1. DO NOT SCALE.
2. Should there be any conflict between the details indicated on this drawing and those indicated on other drawings the Engineer should be informed PRIOR to construction on site.
3. Until technical approval has been obtained from the relevant Authority, it should be understood that all drawings issued are Preliminary and NOT for construction. Should the contractor commence site work prior to such approval being given, it is entirely at his own risk.
4. All dimensions are in millimetres unless otherwise stated.
5. The BSP Hazard Identification and Risk Assessment information for this project must be reviewed and understood by the contractor PRIOR to the commencement of any works on site.

First issue	TKH	15/10/21	PN	15/10/21	TG	15/10/21
-------------	-----	----------	----	----------	----	----------

REV	DRAWN BY	DATE	CHECKED BY	DATE	APPROVED BY	DATE
-----	----------	------	------------	------	-------------	------

SCALE @ A1	ISSUING OFFICE	PROJECT NUMBER
1:250	NOTTINGHAM	21-0633

CLIENT APPROVAL

A - APPROVED
B - APPROVED WITH COMMENTS
C - DO NOT USE

STATUS	PURPOSE OF ISSUE
S1	PRELIMINARY

CIVIL • STRUCTURAL • TRANSPORTATION • GEOTECHNICAL • ENVIRONMENTAL



PROJECT

Proposed 66-Bed Care Home
Shripney Road, Bognor Regis

TITLE

Drainage Strategy

CLIENT

LNT Construction

PROJECT ORIGINATOR	ZONE	LEVEL	TYPE	ROLE	NUMBER	REV
SRBR-BSP-ZZ-00-DR-C-SK240						P01

