

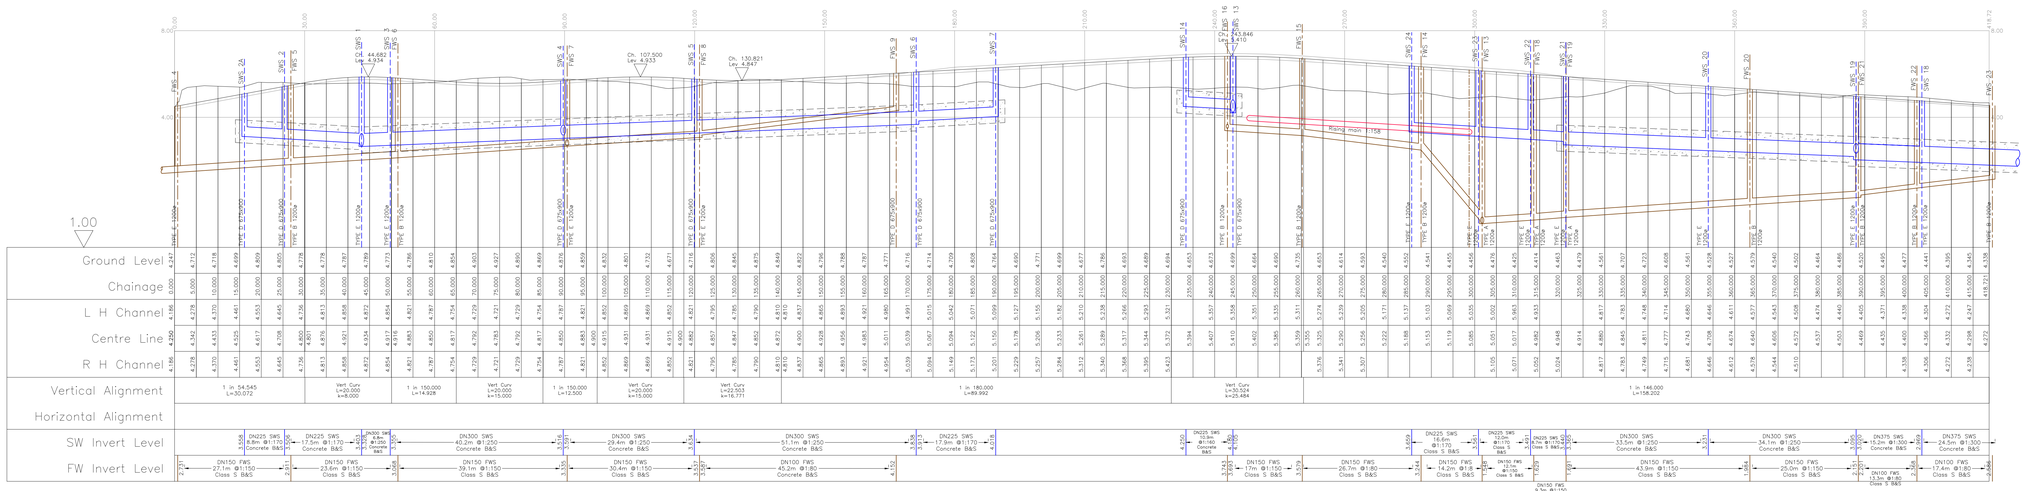


Road 1
Horiz. 1:500

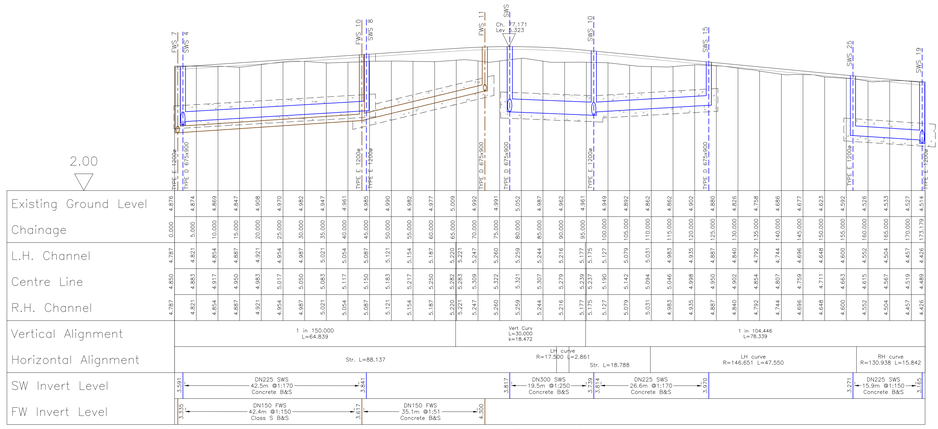

Road 2
Horiz. 1:500 Vert. 1:50

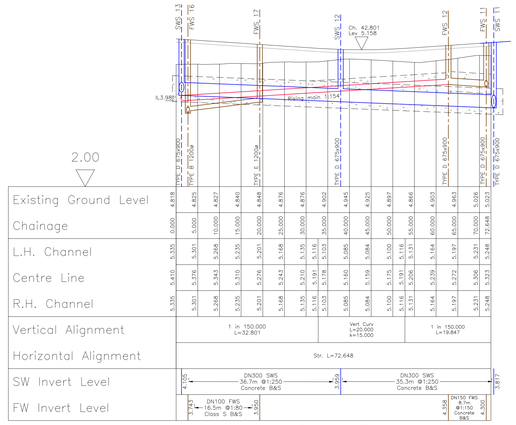

Road 3
Horiz. 1:500 Vert. 1:50

NOTES:

1. Do not scale from this drawing.
2. All dimensions in metres and all levels relate to Ordnance Datum.
3. This drawing is to be read in conjunction with all other engineering drawings. Any discrepancies shall be reported to MJA Consulting Engineer's.
4. The level and location of all existing services shall be verified on site by the Contractor before commencing any construction work.
5. All section 104 work shall be in accordance with the document 'Sewers for Adoption' 6th Edition as published by WRc plc together with relevant Water Authority requirements.
6. All adoptable works to be checked by the Water Authority Inspector.
7. All adoptable pipework up to DN225 shall be Extra Strength Vitrified Clay, DN300 or above shall be concrete. All adoptable pipes to be Strength Class 120. If the contractor wishes to use structural wall plastic pipe, then approval must be gained from the Adopting Water Authority.
8. Sewers and drains of different diameters should be laid soffit to soffit unless otherwise specified.
9. All covers and frames shall be 150mm deep to BS.EN.124, badged SW or FW if requested.
10. Contractor must comply with all current legislation relating to CDM, Health and Safety and COSHH.

PRELIMINARY

REV. No.	DATE	DESCRIPTION	INITIALS

Client: Linden Homes

MJA CONSULTING
CIVIL AND STRUCTURAL ENGINEERS
Monarch House, Barton Lane,
Abingdon, Oxon, OX14 3NB
Tel: 01235 555173
Fax: 01235 523226

Project: New Barn Lane North Bersted

Title: Road Longitudinal Sections 99 Unit Scheme (Alternative Application)

Scale: As Shown@A0 | Date: Feb'19 | Drawing No.: LHS232-4010 | Rev.: —

Checked: KTG | Drawn: TDF

© This drawing is the copyright of Michael A Jennings Associates Limited and may not be copied, altered or reproduced in any way without their permission.