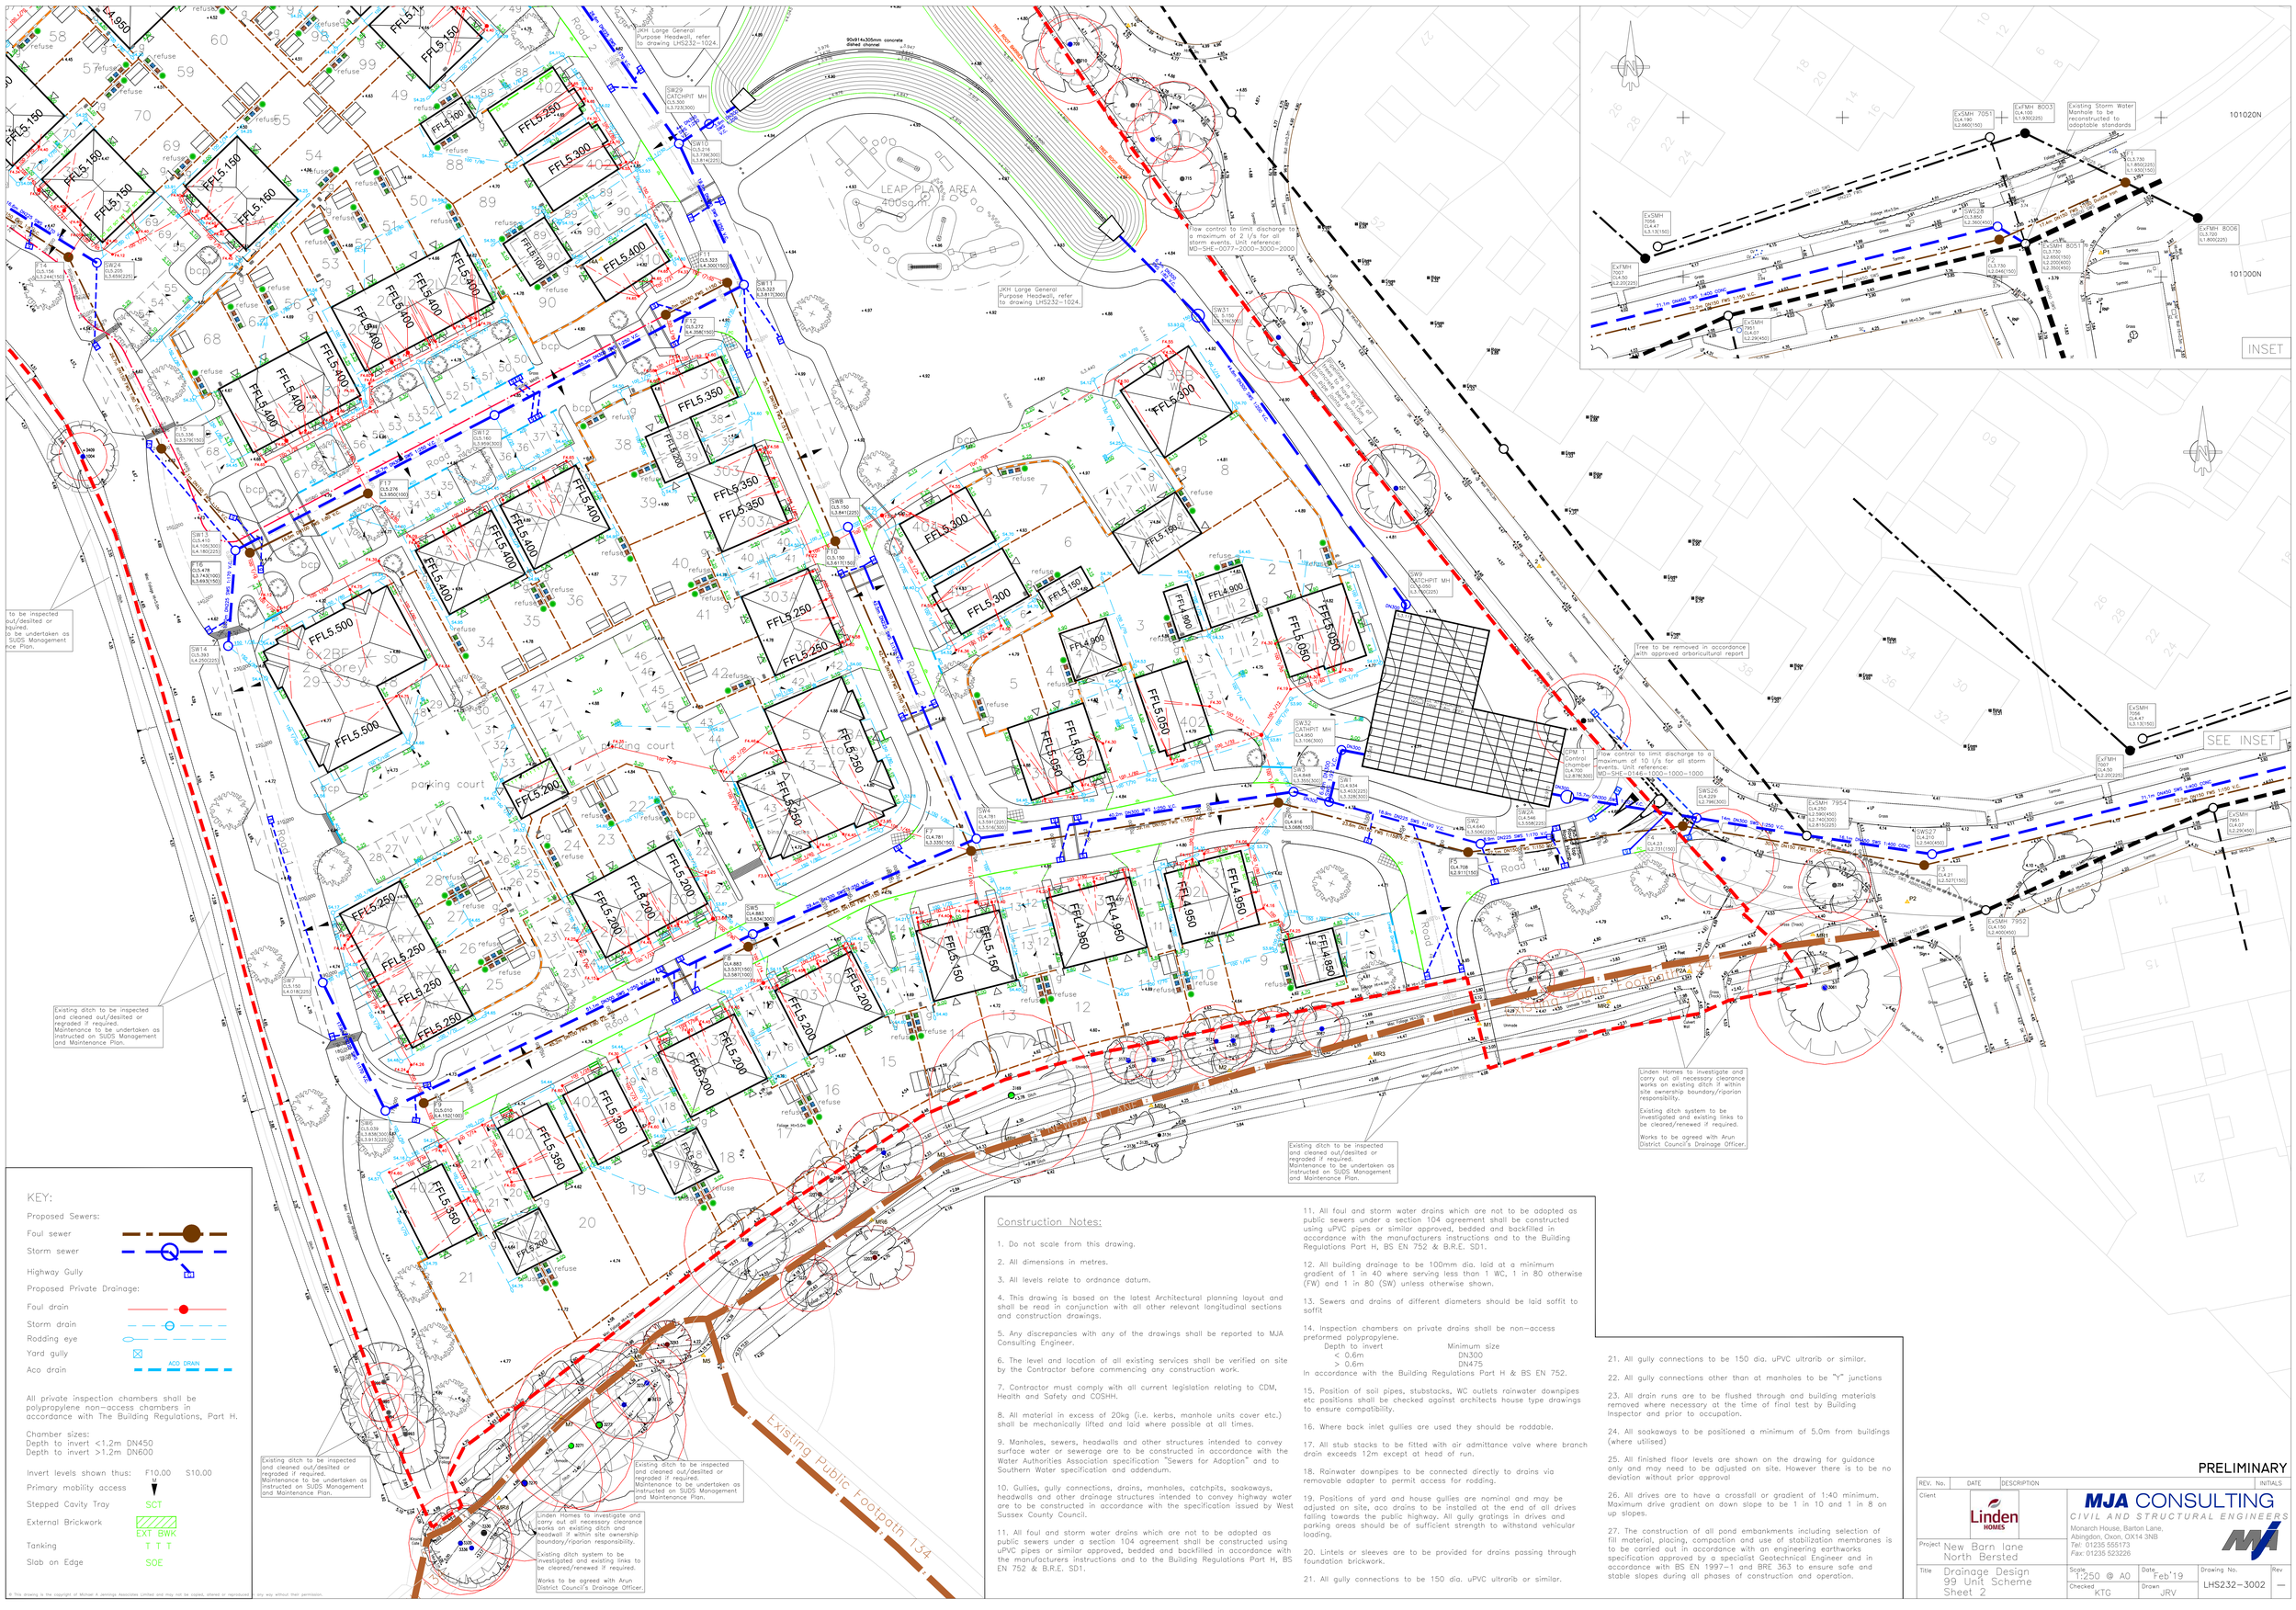


KEY:

Proposed Sewers:

- Foul sewer
- Storm sewer
- Highway Gully

Proposed Private Drainage:

- Foul drain
- Storm drain
- Rodding eye
- Yard gully
- Aco drain (ACO DRAIN)

All private inspection chambers shall be polypropylene non-access chambers in accordance with The Building Regulations, Part H.

Chamber sizes:
Depth to invert <1.2m DN450
Depth to invert >1.2m DN600

Invert levels shown thus: F10.00 S10.00

Primary mobility access

Stepped Cavity Tray SCT

External Brickwork EXT BWK

Tanking T T T

Slab on Edge SOE

Construction Notes:

1. Do not scale from this drawing.
2. All dimensions in metres.
3. All levels relate to ordnance datum.
4. This drawing is based on the latest Architectural planning layout and shall be read in conjunction with all other relevant longitudinal sections and construction drawings.
5. Any discrepancies with any of the drawings shall be reported to MJA Consulting Engineer.
6. The level and location of all existing services shall be verified on site by the Contractor before commencing any construction work.
7. Contractor must comply with all current legislation relating to CDM, Health and Safety and COSHH.
8. All material in excess of 20kg (i.e. kerbs, manhole units cover etc.) shall be mechanically lifted and laid where possible at all times.
9. Manholes, sewers, headwalls and other structures intended to convey surface water or sewerage are to be constructed in accordance with the Water Authorities Association specification "Sewers for Adoption" and to Southern Water specification and addendum.
10. Gullies, gully connections, drains, manholes, catchpits, soakaways, headwalls and other drainage structures intended to convey highway water are to be constructed in accordance with the specification issued by West Sussex County Council.
11. All foul and storm water drains which are not to be adopted as public sewers under a section 104 agreement shall be constructed using uPVC pipes or similar approved, bedded and backfilled in accordance with the manufacturers instructions and to the Building Regulations Part H, BS EN 752 & B.R.E. SD1.
12. All building drainage to be 100mm dia. laid at a minimum gradient of 1 in 40 where serving less than 1 WC, 1 in 80 otherwise (FW) and 1 in 80 (SW) unless otherwise shown.
13. Sewers and drains of different diameters should be laid soffit to soffit
14. Inspection chambers on private drains shall be non-access preformed polypropylene.
    Depth to invert — Minimum size
    < 1.6m — DN300
    > 0.6m — DN475
    In accordance with the Building Regulations Part H & BS EN 752.
15. Position of soil pipes, stubstacks, WC outlets rainwater downpipes etc positions shall be checked against architects house type drawings to ensure compatibility.
16. Where back inlet gullies are used they should be roddable.
17. All stub stacks to be fitted with air admittance valve where branch drain exceeds 12m except at head of run.
18. Rainwater downpipes to be connected directly to drains via removable adapter to permit access for rodding.
19. Positions of yard and house gullies are nominal and may be adjusted on site, aco drains to be installed at the end of all drives falling towards the public highway. All gully gratings in drives and parking areas should be of sufficient strength to withstand vehicular loading.
20. Lintels or sleeves are to be provided for drains passing through foundation brickwork.
21. All gully connections to be 150 dia. uPVC ultrarib or similar.
22. All gully connections other than at manholes to be "Y" junctions
23. All drain runs are to be flushed through and building materials removed where necessary at the time of final test by Building Inspector and prior to occupation.
24. All soakaways to be positioned a minimum of 5.0m from buildings (where utilised)
25. All finished floor levels are shown on the drawing for guidance only and may need to be adjusted on site. However there is to be no deviation without prior approval
26. All drives are to have a crossfall or gradient of 1:40 minimum. Maximum drive gradient on down slope to be 1 in 10 and 1 in 8 on up slopes.
27. The construction of all pond embankments including selection of fill material, placing, compaction and use of stabilization membranes is to be carried out in accordance with an engineering earthworks specification approved by a specialist Geotechnical Engineer and in accordance with BS EN 1997-1 and BRE 363 to ensure safe and stable slopes during all phases of construction and operation.

PRELIMINARY

REV. No.	DATE	DESCRIPTION	INITIALS

Client: Linden HOMES

MJA CONSULTING
CIVIL AND STRUCTURAL ENGINEERS
Monarch House, Barton Lane, Abingdon, Oxon, OX14 3NB
Tel: 01235 555173
Fax: 01235 523226

Project: New Barn lane North Bersted

Title: Drainage Design 99 Unit Scheme Sheet 2

Scale: 1:250 @ A0 | Date: Feb'19 | Drawing No.: LHS232-3002 | Rev: —

Checked: KTG | Drawn: JRV

© This drawing is the copyright of Michael A Jennings Associates Limited and may not be copied, altered or reproduced in any way without their permission.