


email address: [REDACTED]



**Cian Cronin  
Arun District Council**

Arun Civic Centre  
Maltrevers Road  
Littlehampton  
West Sussex  
BN17 5LF

*CgMs 17448*

20 June 2014

Dear Cian,

**Re: Oldlands Farm, Bognor Regis**

Just to confirm the current position regarding archaeology on the above site.

CgMs has been in regular contact with Mark Taylor, the planning archaeologist, most recently on the 29.05.14 and has agreed the following: -

1. To carry out a geophysical survey of the accessible areas within the development footprint. A WSI for this work was submitted to Mark Taylor on 23.05.14. Please see the report from Archaeophysica attached.
2. For a geoarchaeologist from Archaeology South East to monitor the geotechnical testpits being excavated by Hydrock. A WSI for this work was submitted to Mark Taylor on 29.05.14. Please find an interim report on this work attached – the final report is due by 27.06.14.
3. That there is no requirement for additional desk-based assessment.

It is now clear that there is a design solution available to limit the impact on the archaeological resource within the main site. There is c. 600 mm of cover over the archaeological horizon and it is planned to import up to 3 m of material to cover this. Even allowing for a topsoil strip in advance of building up levels, with control of plant movement impacts on archaeology should be limited to piling – and that should be within acceptable levels.

The information currently available suggests that the archaeological resource is focused in the area previously investigated by Cotswold Archaeology. It is anticipated that very limited additional trenching may be required within the main site to inform a design solution – and a WSI for this will be agreed with Mark Taylor shortly.

No design solution will be available within the Flood Compensation Area and it is anticipated that in areas outside of the deep alluvial sequence (which are unlikely to have been habited) we will need to agree a scheme allowing for up to 5% trial trenching. This will establish the need for and scope of any additional mitigation works.

Kind Regards,

**Simon Mortimer MA<sub>(Oxon)</sub>, MIFA**  
**Director**



# **Oldlands Farm, Bognor Regis West Sussex**

## **Geophysical Survey Report**

**Produced for CgMs Consulting**

**Project code OBR141**

**17<sup>th</sup> June 2014**

**R Fry, Geophysicist BA(Hons) MSc  
MJ Roseveare, Senior Geophysicist  
BSc(Hons) MSc MEAGE FGS MIfA**

**ArchaeoPhysica Ltd**   
Kitcheners' Home Farm, Harewood End, Hereford HR2 8TS



## Non-Technical Summary

A magnetic survey was commissioned by CgMs Consulting to prospect land at Oldlands Farm, Bognor Regis, West Sussex for buried structures of archaeological interest.

The survey data was unfortunately affected by intermittent electromagnetic interference across the site, however the effects are thought not to have affected the identification and interpretation of features of potential archaeological interest.

Weakly enhanced anomalies of potential archaeological interest have been identified within the magnetic data. The features of potential archaeological interest appear to be mainly confined to the south-western extent of the surveyed area.

## Digital Data

| Item                  | Sent to        | Sent date |
|-----------------------|----------------|-----------|
| CAD – Vector Elements | Simon Mortimer |           |

## Audit

| Version     | Author | Checked      | Date                       |
|-------------|--------|--------------|----------------------------|
| Interim     |        |              |                            |
| Draft Final | R Fry  | MJ Roseveare | 17 <sup>th</sup> June 2014 |
| Final       |        |              |                            |
| Revision    |        |              |                            |
| OASIS       |        |              |                            |

~ magnetics, electromagnetics, electrical resistance, GPR, topography, landscape & GIS ~



# Table of Contents

|          |                                                                                  |          |
|----------|----------------------------------------------------------------------------------|----------|
| <b>1</b> | <b>Introduction.....</b>                                                         | <b>1</b> |
| 1.1      | Location.....                                                                    | 1        |
| 1.2      | Constraints & variations.....                                                    | 1        |
| <b>2</b> | <b>Context.....</b>                                                              | <b>1</b> |
| 2.1      | Archaeology.....                                                                 | 1        |
| 2.2      | Environment.....                                                                 | 1        |
| <b>3</b> | <b>Methodology.....</b>                                                          | <b>2</b> |
| 3.1      | Survey.....                                                                      | 2        |
|          | 3.1.1 Technical equipment.....                                                   | 2        |
|          | 3.1.2 Monitoring & quality assessment.....                                       | 2        |
| 3.2      | Data processing.....                                                             | 2        |
|          | 3.2.1 Procedure.....                                                             | 2        |
| 3.3      | Interpretation resources.....                                                    | 3        |
| 3.4      | Interpretive classes.....                                                        | 3        |
|          | 3.4.1 Introduction.....                                                          | 3        |
|          | 3.4.2 Agriculture – boundaries.....                                              | 3        |
|          | 3.4.3 Agriculture – cultivation.....                                             | 3        |
|          | 3.4.4 Agriculture – drains.....                                                  | 3        |
|          | 3.4.5 Archaeology – fills.....                                                   | 4        |
|          | 3.4.6 Archaeology – other discrete.....                                          | 4        |
|          | 3.4.7 Archaeology – structures.....                                              | 4        |
|          | 3.4.8 Archaeology – zones.....                                                   | 4        |
|          | 3.4.9 Geology – discrete.....                                                    | 4        |
|          | 3.4.10 Geology – zones.....                                                      | 4        |
|          | 3.4.11 Services.....                                                             | 4        |
|          | 3.4.12 Texture.....                                                              | 5        |
| 3.5      | Standards & guidance.....                                                        | 5        |
| <b>4</b> | <b>Discussion.....</b>                                                           | <b>6</b> |
| 4.1      | Introduction.....                                                                | 6        |
| 4.2      | Principles.....                                                                  | 6        |
|          | 4.2.1 Instrumentation.....                                                       | 6        |
| 4.3      | Character & principal results.....                                               | 6        |
|          | 4.3.1 Archaeology.....                                                           | 6        |
|          | 4.3.2 Land use.....                                                              | 7        |
|          | 4.3.3 Geology.....                                                               | 7        |
| 4.4      | Conclusions.....                                                                 | 7        |
| 4.5      | Caveats.....                                                                     | 8        |
| 4.6      | Bibliography & selected reference.....                                           | 8        |
| <b>5</b> | <b>Appendices.....</b>                                                           | <b>9</b> |
| 5.1      | Project metadata.....                                                            | 9        |
| 5.2      | Archiving.....                                                                   | 9        |
| 5.3      | ArchaeoPhysica.....                                                              | 9        |
|          | 5.3.1 The company.....                                                           | 9        |
|          | 5.3.2 Senior Geophysicist: Martin J Roseveare, MSc BSc(Hons) MEAGE FGS MifA..... | 10       |
|          | 5.3.3 Operations Manager: Anne CK Roseveare, BEng(Hons) DIS.....                 | 10       |
|          | 5.3.4 Geophysicist: Robert Fry, MSc BA(Hons), PhD candidate.....                 | 10       |
|          | 5.3.5 Geophysical Technician: Samuel Purvis, MSc BSc(Hons) .....                 | 10       |

~ magnetics, electromagnetics, electrical resistance, GPR, topography, landscape & GIS ~



## 1 Introduction

Land at Oldlands Farm, Bognor Regis, West Sussex was surveyed to prospect for buried structures of archaeological interest.

### 1.1 Location

|                             |               |
|-----------------------------|---------------|
| <b>Country</b>              | England       |
| <b>County</b>               | West Sussex   |
| <b>Nearest Settlement</b>   | Bognor Regis  |
| <b>Central Co-ordinates</b> | 494210,101540 |

12.8 ha of survey was undertaken across 3 arable fields.

### 1.2 Constraints & variations

The data collected was affected by strong local electromagnetic interference. Additional processing of the data has been performed to minimise the effects of the interference.

## 2 Context

### 2.1 Archaeology

A cultural heritage assessment of the site, undertaken by Drivers Jonas (2007) found that the site *"lies in an area of archaeological potential, with later prehistoric, Roman and Saxon activity having previously been identified within the immediate vicinity"* (Cotswold Archaeology 2008, 3).

Within the south-west field of the proposed geophysical survey, an archaeological evaluation has already been undertaken by Cotswold Archaeology (2008). The following are summarised from the report of this evaluation.

Evaluation trenching by Cotswold Archaeology over the site found signs of Bronze Age activity, with Iron-Age and Roman activity confined largely to the centre and south-western portions of the site respectively.

Excavated ditches have been interpreted as Bronze Age field systems, with a few hints of occupation on the site due to post-holes. Cremation burials from the Bronze Age were also discovered.

Artefacts from the the early-mid Iron-Age occupation of the site appears to have concentrated within the centre of the site. A cremation burial was also discovered.

The Roman occupation of the site comprises ditches consisting of a fieldwork system. All finds from this period were recovered from the south-west of the site.

### 2.2 Environment

|                                 |                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Superficial 1: 50000 BGS</b> | River Terrace Deposits (Undifferentiated) - Sand, Silt And Clay - W side (RTDU), Raised Marine Deposits - Clay, Silt, Sand And Gravel - E side (RMD) |
| <b>Bedrock 1:50000 BGS</b>      | Lewes Nodular Chalk Formation, Seaford Chalk Formation, Newhaven Chalk Formation, Culver Chalk Formation (LPCK)                                      |
| <b>Topography</b>               | Largely flat                                                                                                                                         |
| <b>Hydrology</b>                | Streams to the north and east flowing to the Lidsey Rife                                                                                             |
| <b>Current Land Use</b>         | Farming (mixed)                                                                                                                                      |
| <b>Historic Land Use</b>        | Farming (mixed)                                                                                                                                      |

~ magnetics, electromagnetics, electrical resistance, GPR, topography, landscape & GIS ~



|                                 |                                                                                                                                                      |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Superficial 1: 50000 BGS</b> | River Terrace Deposits (Undifferentiated) - Sand, Silt And Clay - W side (RTDU), Raised Marine Deposits - Clay, Silt, Sand And Gravel - E side (RMD) |
| <b>Vegetation Cover</b>         | Crop – wheat                                                                                                                                         |
| <b>Sources of Interference</b>  | Electromagnetic interference – unknown source.                                                                                                       |

Archaeological features cut into chalk usually produce a relatively strong and well defined magnetic anomaly. Where a change in the superficial geology is detected, slight textural changes are likely to occur within the data.

## 3 Methodology

### 3.1 Survey

#### 3.1.1 Technical equipment

|                           |                                                          |
|---------------------------|----------------------------------------------------------|
| <b>Measured variable</b>  | Magnetic flux density / nT                               |
| <b>Instrument</b>         | Array of Geometrics G858 Magmapper caesium magnetometers |
| <b>Configuration</b>      | Non-gradiometric transverse array (4 sensors, ATV towed) |
| <b>Sensitivity</b>        | 0.03 nT @ 10 Hz (manufacturer's specification)           |
| <b>QA Procedure</b>       | Continuous observation                                   |
| <b>Spatial resolution</b> | 1.0m between lines, 0.3m mean along line interval        |

#### 3.1.2 Monitoring & quality assessment

The system continuously displays all incoming data as well as line speed and spatial data resolution per acquisition channel during survey. Rest mode system noise is therefore easy to inspect simply by pausing during survey, and the continuous display makes monitoring for quality intrinsic to the process of undertaking a survey. Rest mode test results (static test) are available from the system.

### 3.2 Data processing

#### 3.2.1 Procedure

All data processing is minimised and limited to what is essential for the class of data being collected, e.g. reduction of orientation effects, suppression of single point defects (drop-outs or spikes) etc. The processing stream for this data is as follows:

| Process                                        | Software     | Parameters                                                             |
|------------------------------------------------|--------------|------------------------------------------------------------------------|
| Measurement & GNSS receiver data alignment     | Proprietary  |                                                                        |
| Temporal reduction, regional field suppression | Proprietary  | High pass 3s/nT, Low pass 0.3s/nT + arctan to suppress EM interference |
| Gridding                                       | Surfer       | Kriging, 0.25m x 0.25m                                                 |
| Smoothing                                      | Surfer       | Gaussian lowpass 3x3 data                                              |
| Imaging and presentation                       | Manifold GIS |                                                                        |

The initial processing uses proprietary software developed in conjunction with the multisensor acquisition system. Gridded data is ported as data surfaces (not images) into Manifold GIS for final imaging and detailed analysis. Specialist analysis is undertaken using proprietary software.

General information on processes commonly applied to data can be found in standard text books and also in the 2008 English Heritage Guidelines "Geophysical Survey in Archaeological Field Evaluation" at

~ magnetics, electromagnetics, electrical resistance, GPR, topography, landscape & GIS ~



[http://www.helm.org.uk/upload/pdf/Geophysical\\_LoRes.pdf](http://www.helm.org.uk/upload/pdf/Geophysical_LoRes.pdf).

ArchaeoPhysica uses more advanced processing for magnetic data using potential field techniques standard to near-surface geophysics. Details of these can be found in Blakely, 1996, "Potential Theory in Gravity and Magnetic Applications", Cambridge University Press.

All archived data includes process metadata.

### **3.3 Interpretation resources**

Numerous sources are used in the interpretive process which takes into account shallow geological conditions, past and present land use, drainage, weather before and during survey, topography and any previous knowledge about the site and the surrounding area. Old Ordnance Survey mapping is consulted and also older sources if available. Geological information is sourced only from British Geological Survey resources and aerial imagery from online sources. Topographic data is usually sourced from the Environment Agency (LiDAR) unless derived from original ArchaeoPhysica survey.

Information from nearby ArchaeoPhysica surveys is consulted to inform upon local data character, variations across soils and near-surface geological contexts. Published data from other contractors may also be used if accompanied by adequate metadata.

### **3.4 Interpretive classes**

#### **3.4.1 Introduction**

Key to interpretation is separation of each anomaly into broad classes, namely whether caused by agricultural processes (e.g. ploughing, composting, drainage etc.), geological factors or whether a structure of archaeological interest is likely. Within these anomalies are in turn classified by whether they most likely represent a fill or a drain, or a region of differing data texture, etc. More detailed descriptions are included below.

The actual means of classification is based upon geophysical understanding of anomaly formation, the behaviour of soils, landscape context and structural form. For example, to consider just one form of anomaly: weakly dipolar discrete magnetic anomalies of small size are likely to have shallow non-ferrous sources and are therefore likely to be pits. Larger ones of the same class could also be pits or locally-deeper topsoil but if strongly magnetic could also be hearths. Strongly dipolar discrete anomalies are in all cases likely to be ferrous or similarly magnetic debris, although small repeatedly heated and in-situ hearths can produce similar anomalies.

#### **3.4.2 Agriculture – boundaries**

Coherent linear dipolar enhancement of magnetic field strength marking ditch fills, narrow bands of more variable magnetic field or changes in apparent magnetic susceptibility, are all included within this category if they correlate with boundaries depicted on the Tithe Map or early Ordnance Survey maps. If there is no correlation then these anomaly types are not categorised as a field boundaries.

#### **3.4.3 Agriculture – cultivation**

Banded variations in apparent magnetic susceptibility caused by a variable thickness of topsoil, depositional remanent magnetisation of sediments in furrows or susceptibility enhancement through heating (a by product of burning organic matter like seaweed) tend to indicate past cultivation, whether ridge-based techniques, medieval ridge and furrow or post medieval 'lazy beds'. Modern cultivation, e.g. recent ploughing, is not included.



#### **3.4.4 Agriculture – drains**

In some cases it is possible to identify drainage networks either as ditch-fill type anomalies (typically 'Roman' drains), noisy or repeating dipolar anomalies from terracotta pipes or reduced magnetic field strength anomalies from culverts, plastic or non-reinforced concrete pipes. In all cases identification of a herring bone pattern to these is sufficient for inclusion within this category.

#### **3.4.5 Archaeology – fills**

Any linear or discrete enhancement of magnetic field strength, usually with a dipolar character of variable strength, that cannot be categorised as a field boundary, cultivation or as having a geological origin, is classified as a fill potentially being of archaeological interest. Fills are normally earthen and include an often invisible proportion of heated soil or topsoil that augments local magnetic field strength. Inverted anomalies are possible over non-earthen fills, e.g. those that comprise peat, sand or gravel within soil. This category is subject to the 'habitation effect' where, in the absence of other sources of magnetic material, anomaly strength will decrease away from sources of heated soil and sometimes to the extent of non-detectability.

Former enclosure ditches that contained standing water can promote enhanced volumetric magnetic susceptibility through depositional remanence and remain detectable regardless of the presence of other sources of magnetic material.

#### **3.4.6 Archaeology – other discrete**

This category is secondary to fills and includes anomalies that by virtue of their character are likely to be of archaeological interest but cannot be adequately described as fills. Examples include strongly magnetic bodies lacking ferrous character that might indicate hearths or kilns. In some cases anomalies of ferrous character may be included.

#### **3.4.7 Archaeology – structures**

On some sites the combination of plan form and anomaly character, e.g. rectilinear reduced magnetic field strength anomalies, might indicate the likely presence of masonry, robber trenches or rubble foundations. Other types of structure are only included if the evidence is unequivocal, e.g. small ring ditches with doorways and hearths indicating hearths. In some circumstances a less definite category may be assigned to the individual anomalies instead.

#### **3.4.8 Archaeology – zones**

On some sites it is possible to define different areas of activity on the basis of magnetic character, e.g. texture and anomaly strength. These might indicate the presence of middens or foci within larger complexes. This category does not indicate a presence or absence of anomalies possibly of archaeological interest.

#### **3.4.9 Geology – discrete**

On some sites, e.g. some gravels and alluvial contexts, there will be anomalies that can obscure those potentially of archaeological interest. They may have a strength equal to or greater than that associated with more relevant sources, e.g. ditch fills, but can normally be differentiated on the basis of anomaly form coupled with geological understanding. Where there is ambiguity, or relevance to the study, these anomalies will be included in this category.

#### **3.4.10 Geology – zones**

Not all changes in geology can be detected at the surface, directly or indirectly, but sometimes there will be a difference evident in the geological data that can be attributed to a change, e.g. from alluvium to tidal flat deposits, or bedrock to alluvium. In some cases the geophysical difference will not exactly coincide with the

~ magnetics, electromagnetics, electrical resistance, GPR, topography, landscape & GIS ~



geological contact and this is especially the case across transitions in soil type.

#### **3.4.11 Services**

All overhead (OH) and underground (UG) services are depicted where these are detectable in the data or may influence aspects of the interpretation.

#### **3.4.12 Texture**

Geophysical data varies in character across areas, due to a range of factors including soil chemistry, near surface geology, hydrology and land use past and present. Where these variations are of interest or relevance to the study they are included in this category.

### **3.5 Standards & guidance**

All work was conducted in accordance with the following standards and guidance:

- David et al, "Geophysical Survey in Archaeological Field Evaluation", English Heritage, 2008.
- "Standard and Guidance for Archaeological Field Evaluation", Institute for Archaeologists, 2008.

In addition, all work is undertaken in accordance with the high professional standards and technical competence expected by the Geological Society of London and the European Association of Geoscientists and Engineers.

All personnel are experienced surveyors trained to use the equipment in accordance with the manufacturer's expectations. All aspects of the work are monitored and directed by fully qualified professional geophysicists.

~ magnetics, electromagnetics, electrical resistance, GPR, topography, landscape & GIS ~



## **4 Discussion**

### **4.1 Introduction**

The sections below first discuss the geophysical context within which the results need to be considered and then specific features or anomalies of particular interest. Not all will be discussed here and the reader is advised to consult the catalogue (ibid) in conjunction with the graphical elements of this report.

### **4.2 Principles**

In general, topsoil is more magnetic than subsoil which can be slightly more magnetic than parent geology, whether sands, gravels or clays, however, there are exceptions to this. The reasons for this are natural and are due to biological processes in the topsoil that change iron between various oxidation states, each differently magnetic. Where there is an accumulation of topsoil or where topsoil has been incorporated into other features, a greater magnetic susceptibility will result.

Within landscapes soil tends to accumulate in negative features like pits and ditches and will include soil particles with thermo-remanent magnetization (TRM) through exposure to heat if there is settlement or industry nearby. In addition, particles slowly settling out of stationary water will attempt to align with the ambient magnetic field at the time, creating a deposit with depositional remanent magnetization (DRM).

As a consequence, magnetic survey is nearly always more a case of mapping accumulated magnetic soils than structures which would not be detected unless magnetic in their own right, e.g. built of brick or tile. As a prospecting tool it is thus indirect. Fortunately, the mechanisms outlined above are commonplace and favoured by human activity and it is nearly always the case that cut features will alter in some way the local magnetic field.

#### **4.2.1 Instrumentation**

The use of the magnetic sensors in non-gradiometric (vertical) configuration avoids measurement sensitisation to the shallowest region of the soil, allowing deeper structures, whether natural or otherwise to be imaged within the sensitivity of the instrumentation. However, this does remove suppression of ambient noise and temporal trends which have to be suppressed later during processing. When compared to vertical gradiometers in archaeological use, there is no significant reduction in lateral resolution when using non-gradiometric sensor arrays and the inability of gradiometers to detect laminar structures is completely avoided.

Caesium instrumentation has a greater sensitivity than fluxgate instruments, however, at the 10 Hz sampling rate used here this increase in sensitivity is limited to about one order of magnitude.

The array system is designed to be non-magnetic and to contribute virtually nothing to the magnetic measurement, whether through direct interference or through motion noise. There is, however, some limited contribution from the towing ATV.

### **4.3 Character & principal results**

The magnetic survey overlaps an area of a past archaeological excavation within its south-western extent (Cotswold Archaeology, 2008). The resultant geophysical interpretation is however based solely on the collected magnetic data. Where there are discrepancies or correlations between the excavated trenches and the geophysical interpretation they have been noted below. Geophysical anomalies are referred to in square brackets [], and excavated archaeological contexts in circular brackets ().

#### **4.3.1 Archaeology**

There are various weakly enhanced linear anomalies within the dataset which may be of archaeological

~ magnetics, electromagnetics, electrical resistance, GPR, topography, landscape & GIS ~



interest. These have been identified as [8], [9], [10], [11], [13], [14] & [18]. These features are all weakly enhanced magnetic anomalies (possible ditches) however, due to the low magnetic contrast of the site and the electromagnetic interference experienced, further interpretation of the features based on the geophysical data has been aided where appropriate by the archaeological trenching.

The most prominent features of potential archaeological interest within the dataset consist of a series of weakly enhanced linear features at approximate right-angles [8]. These may form a series of ditches enclosing a rectangular area. Unfortunately no excavation trenches were placed in this area for verification.

A linear ditch anomaly within the magnetic data [9] to the west of of Trench 35, may have extended further to intersect the position of excavated ditch (35004). These features however appear to be on a different alignment, and if they are related, would suggest that the feature turns just before the trench.

A very weak anomaly within the magnetic dataset [10], possibly relates to a pit (10007) containing heat affected stone in Trench 10. Excavated ditches (10003) and (10005) from the same trench were not identified within the magnetic data.

A weakly enhanced linear anomaly [14] may correspond to V-shaped ditch Within the position of Trench 24, (24007). Weakly enhanced linear anomaly [13] may also relate to ditch (36011) recorded in Trench 36.

In Trench 9, a suspected layer of burnt stone was identified, however this has not been identified within the magnetic data.

In Trenches 2, 4 and 13, no archaeological features or deposits were identified from excavation. Within these areas, no anomalies of archaeological importance have been identified within the magnetic dataset either.

#### **4.3.2 Land use**

There is extensive evidence of past land use within the dataset. The strong dipolar areas indicated by [2] include the location of old ponds, and are likely to be zones of modern debris and levelling. This is verified by excavation data from Trenches 1, 11 and 12.

Linear feature [4] is a historic field boundary depicted within the 1876 OS map of the area. Linear feature [5] is also a former field boundary which is first depicted within the 1898 OS map of the area.

Given its parallel position to the extant field boundary (60m to the east), strong enhanced linear feature [3] may have once been used as a field boundary, and may now contain a buried utility pipe or cable. 30m to the east and parallel to [3], fragmented linear anomaly [6] may also have been used as a field boundary for a strip field system.

Enhanced linear anomalies [12] and [15] are fills of field boundaries depicted on OS mapping from 1974 – 1990s. A reduced linear anomaly [16], parallel to both [12] & [15] may also form an old field boundary. On a slightly different alignment to the south, an enhanced linear feature [7] is also likely to be a field boundary.

#### **4.3.3 Geology**

The geology of the site has provided a weak magnetic contrast, and has been acceptable for the identification of features of archaeological interest. Slight textural changes within the background data indicated by [1] & [17] may suggest a boundary between the superficial geologies of river terrace deposits and silicate-rich clay - silts.

#### **4.4 Conclusions**

Weakly enhanced anomalies of potential archaeological interest have been identified within the magnetic data. These features of potential archaeological interest appear to be mainly confined to the south-western extents of the surveyed area.



## 4.5 Caveats

Geophysical survey is a systematic measurement of some physical property related to the earth. There are numerous sources of disturbance of this property, some due to archaeological features, some due to the measuring method, and others that relate to the environment in which the measurement is made. No disturbance, or 'anomaly', is capable of providing an unambiguous and comprehensive description of a feature, in particular in archaeological contexts where there are a myriad of factors involved.

The measured anomaly is generated by the presence or absence of certain materials within a feature, not by the feature itself. Not all archaeological features produce disturbances that can be detected by a particular instrument or methodology. For this reason, the absence of an anomaly must never be taken to mean the absence of an archaeological feature. The best surveys are those which use a variety of techniques over the same ground at resolutions adequate for the detection of a range of different features.

Where the specification is by a third party ArchaeoPhysica will always endeavour to produce the best possible result within any imposed constraints and any perceived failure of the specification remains the responsibility of that third party.

Where third party sources are used in interpretation or analysis ArchaeoPhysica will endeavour to verify their accuracy within reasonable limits but responsibility for any errors or omissions remains with the originator.

Any recommendations are made based upon the skills and experience of staff at ArchaeoPhysica and the information available to them at the time. ArchaeoPhysica is not responsible for the manner in which these may or may not be carried out, nor for any matters arising from the same.

## 4.6 Bibliography & selected reference

- Aspinall *et al*, 2008, "Magnetometry for Archaeologists", Geophysical Methods for Archaeology, Altamira Press
- Blakely, 1996, "Potential Theory in Gravity and Magnetic Applications", Cambridge University Press
- Cotswold Archaeology, 2008, Oldlands Farm Bognor Regis West Sussex, Archaeological Evaluation. CA Project 2605, CA Report 08130. Cirencester.
- David *et al*, 2008, "Geophysical Survey in Archaeological Field Evaluation", English Heritage
- Gaffney *et al*, 2002, "Technical Note 6: The use of geophysical techniques in archaeological evaluations", Institute for Archaeologists
- Milsom, 2003, "Field Geophysics", 3<sup>rd</sup> edition, The Geological Field Guide Series, Wiley
- Schmidt, A., 2013, "Geophysical Data in Archaeology: A Guide to Good Practice", ADS
- Scollar, 1990, "Archaeological Prospecting and Remote Sensing", Topics in Remote Sensing 2, Cambridge University Press
- Tarling *et al* (ed.), 1999, "Palaeomagnetism and Diagenesis in Sediments", Geological Society, London, Special Publications, 151
- Telford *et al*, 1990, "Applied Geophysics", 2<sup>nd</sup> Edition, Cambridge University Press



## 5 Appendices

### 5.1 Project metadata

|                                  |                                              |
|----------------------------------|----------------------------------------------|
| <b>Project Name</b>              | Oldlands Farm, Bognor Regis, West Sussex     |
| <b>Project Code</b>              | OBR141                                       |
| <b>Client</b>                    | CgMs Consulting                              |
| <b>Fieldwork Dates</b>           | 28 <sup>th</sup> - 30 <sup>th</sup> May 2014 |
| <b>Field Personnel</b>           | S Purvis, D Rouse                            |
| <b>Data Processing Personnel</b> | S Purvis, AK Roseveare                       |
| <b>Reporting Personnel</b>       | R Fry, MJ Roseveare                          |
| <b>Draft Report Date</b>         | 17 <sup>th</sup> June 2014                   |
| <b>Final Report Date</b>         |                                              |

### 5.2 Archiving

ArchaeoPhysica maintains an archive for all its projects, access to which is permitted for research purposes. Copyright and intellectual property rights are retained by ArchaeoPhysica on all material it has produced, the client having full licence to use such material as benefits their project. Access is by appointment only and some content is restricted and not available to third parties

Archive formation is in the spirit of Schmidt, A., 2013, "Geophysical Data in Archaeology: A Guide to Good Practice", ADS.

ArchaeoPhysica has a policy of contributing in time to the ADS Grey Literature library, usually after about six months post-dating release of the report. In addition, extracts of data images may be used, without reference to their source, in marketing and similar material. In these cases anything that might identify the project or client is removed.

### 5.3 ArchaeoPhysica

#### 5.3.1 The company

ArchaeoPhysica has provided geophysical survey to archaeologists since 1998 and is consequently one of the oldest specialist companies in the sector. It has become one of the most capable operations in the UK, undertaking 1000 hectares of magnetic survey per annum. In addition 2D & 3D electrical, low frequency electromagnetic and radar surveys are regularly undertaken across the UK, also overseas. ArchaeoPhysica is the most established provider of caesium vapour magnetic survey in Europe, and holds probably the largest archaeological archive of total field magnetic data in the world. Unusually for the archaeological sector, key staff are acknowledged qualified geophysical specialists in their own right and regularly contribute to in-house and other research projects. For a number of years the company taught applied geophysics to Birkbeck College (London) undergraduate and post-graduate archaeology students, and developed a new and comprehensive course for the College.

All work is undertaken by qualified and experienced geophysicists who have specialised in the detection and mapping of near surface structures in archaeology and other disciplines using a wide variety of techniques. There is always a geophysicist qualified to post-graduate level on site during fieldwork and all processing and interpretation is undertaken under the direct influence of either the same individual or someone of similar qualifications and experience.

ArchaeoPhysica meets with ease the requirements of English Heritage in their 2008 Guidance "Geophysical Survey in Archaeological Field Evaluation" section 2.8 entitled "Competence of survey personnel". The company is one of the most experienced in European archaeological prospection and is a key professional player. It only employs people with recognised geoscience qualifications and capable of becoming Fellows of

~ magnetics, electromagnetics, electrical resistance, GPR, topography, landscape & GIS ~



the Geological Society of London, the Chartered UK body for geophysicists and geologists.

### **5.3.2 Senior Geophysicist: Martin J Roseveare, MSc BSc(Hons) MEAGE FGS MIfA**

Martin specialised (MSc) in geophysical prospection for shallow applications at the University of Bradford in 1997 and has worked in commercial geophysics since then. He was elected a Fellow of the Geological Society of London in 2009 and is also a full member of the Institute of Archaeologists. He has taught applied geophysics for Birkbeck College's archaeological degree students for a number of years. Professional interests outside archaeology include the application of geophysics to agriculture, also geohazard monitoring and prediction. He also has considerable practical experience of the improvement and integration of geophysical hardware and software. At ArchaeoPhysica Martin carries overall responsibility for all things geophysical and is often found writing reports or buried in obscure software and circuit diagrams. He was elected onto the EuroGPR and IfA GeoSIG committees in Autumn 2013.

### **5.3.3 Operations Manager: Anne CK Roseveare, BEng(Hons) DIS**

On looking beyond engineering, Anne turned her attention to environmental monitoring and geophysics and has since been applying specialist knowledge of chemistry & fluid flow to soils. She is member of the British Society of Soil Science and is interested in the use of agricultural applications of geophysics. Anne was the founding editor of the International Society for Archaeological Prospection (ISAP) and has spent many years walking fields in parallel lines. Much of her time now is spent managing complicated scheduling and logistics for ArchaeoPhysica, overseeing safety procedures and data handling, while dreaming of interesting places around the world to undertake surveys, including researching the urban archaeology of Asia.


### **5.3.4 Geophysicist: Robert Fry, MSc BA(Hons), PhD candidate**

Rob studied Archaeology B.A.(Hons.) at the University of Reading from 2004-07 where his research was heavily influenced by geophysical techniques and work included organising and leading the magnetic survey of Silchester Roman Town. Following university, he joined the British School at Rome, conducting magnetic surveys in Spain, Italy and Libya. After working briefly as a geophysicist at Wessex Archaeology, Rob became Project Officer of The Silchester Mapping Project at the University of Reading. Since then, he has gained an MSc in Archaeological Prospection from the University of Bradford. He is now writing up his PhD thesis in time-lapse geophysical monitoring techniques and analysis as part of the DART Project. Rob is currently the editor of ISAP News. At ArchaeoPhysica Rob is normally found in the field or in the office besieged by colossal quantities of survey data.

### **5.3.5 Geophysical Technician: Samuel Purvis, MSc BSc(Hons)**

Sam studied Archaeology at The University of Bradford before progressing to a Masters in Archaeological Prospection. His primary research focus is on electromagnetic methods of shallow survey and is an expert with the newest multicoil electromagnetic instrumentation. Sam's main role at ArchaeoPhysica is technical, collecting high quality data, maintaining systems and keeping the show on the road.

~ magnetics, electromagnetics, electrical resistance, GPR, topography, landscape & GIS ~

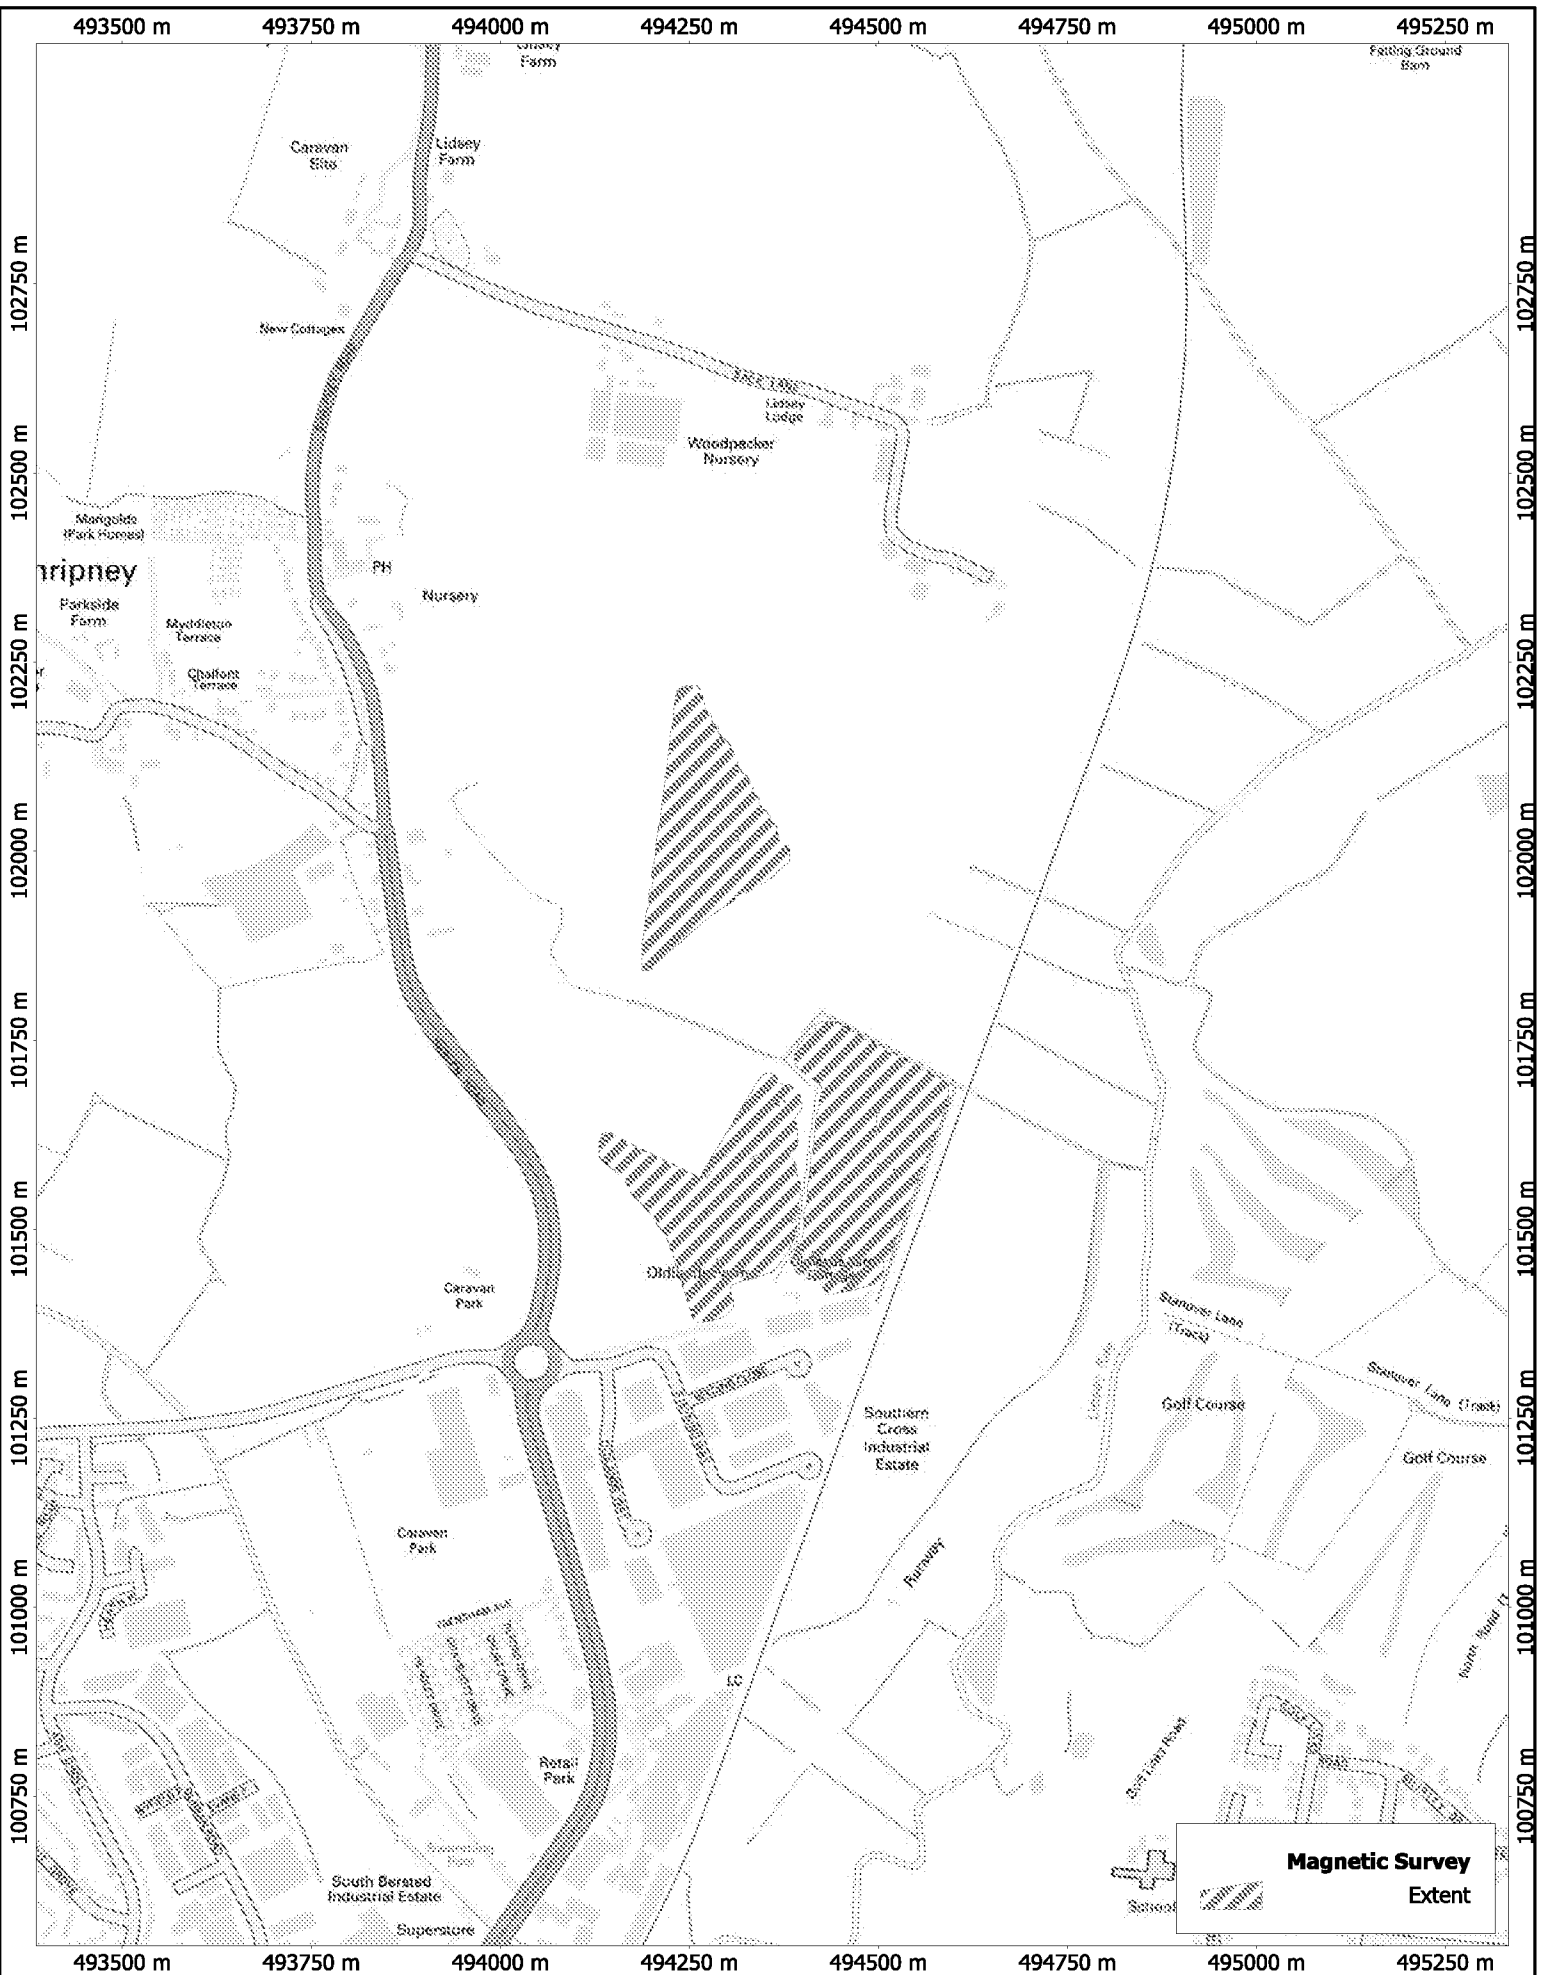

OBR141 Oldlands Farm Bog nor Regis  
DWG 01 Location Map



ArchaeoPhysica Ltd

494100 m

494200 m

494300 m

494400 m

494500 m

494600 m

102200 m  
102100 m  
102000 m  
101900 m  
101800 m  
101700 m  
101600 m  
101500 m  
101400 m**Total Magnetic Field**

High pass 5s/nT (arctan)

1  
0  
-1

494100 m

494200 m

494300 m

494400 m

494500 m

494600 m

OBR141 Oldlands Farm Bognor Regis  
DWG 02 Magnetic Data (full survey extent)



ArchaeoPhysica Ltd

Orthographic Centre X: 494360.06 m Centre Y: 101809.92 m Scale: 1:3500 @ A4 Spatial Units: Meter. Do not scale off this drawing  
File: OBR141 map from DELHI 16/6/2014 Copyright ArchaeoPhysica Ltd 2014 OS OpenData Crown Copyright & Database Right 2014

494150 m 494175 m 494200 m 494225 m 494250 m 494275 m 494300 m 494325 m 494350 m 494375 m 494400 m

102200 m 102175 m 102150 m 102125 m 102100 m 102075 m 102050 m 102025 m 102000 m 101975 m 101950 m 101925 m 101900 m 101875 m



102200 m 102175 m 102150 m 102125 m 102100 m 102075 m 102050 m 102025 m 102000 m 101975 m 101950 m 101925 m 101900 m 101875 m

494150 m 494175 m 494200 m 494225 m 494250 m 494275 m 494300 m 494325 m 494350 m 494375 m 494400 m

OBR141 Oldlands Farm Bognor Regis  
DWG 03 Magnetic Data North



ArchaeoPhysica Ltd

494150 m 494175 m 494200 m 494225 m 494250 m 494275 m 494300 m 494325 m 494350 m 494375 m

101700 m 101675 m 101650 m 101625 m 101600 m 101575 m 101550 m 101525 m 101500 m 101475 m 101450 m 101425 m 101400 m 101375 m



101700 m 101675 m 101650 m 101625 m 101600 m 101575 m 101550 m 101525 m 101500 m 101475 m 101450 m 101425 m 101400 m 101375 m

494150 m 494175 m 494200 m 494225 m 494250 m 494275 m 494300 m 494325 m 494350 m 494375 m

OBR141 Oldlands Farm Bognor Regis  
DWG 04 Magnetic Data South-West



ArchaeoPhysica Ltd

494350 m 494375 m 494400 m 494425 m 494450 m 494475 m 494500 m 494525 m 494550 m 494575 m 494600 m



494350 m 494375 m 494400 m 494425 m 494450 m 494475 m 494500 m 494525 m 494550 m 494575 m 494600 m

OBR141 Oldlands Farm Bognor Regis  
DWG 05 Magnetic Data South-East



ArchaeoPhysica Ltd