


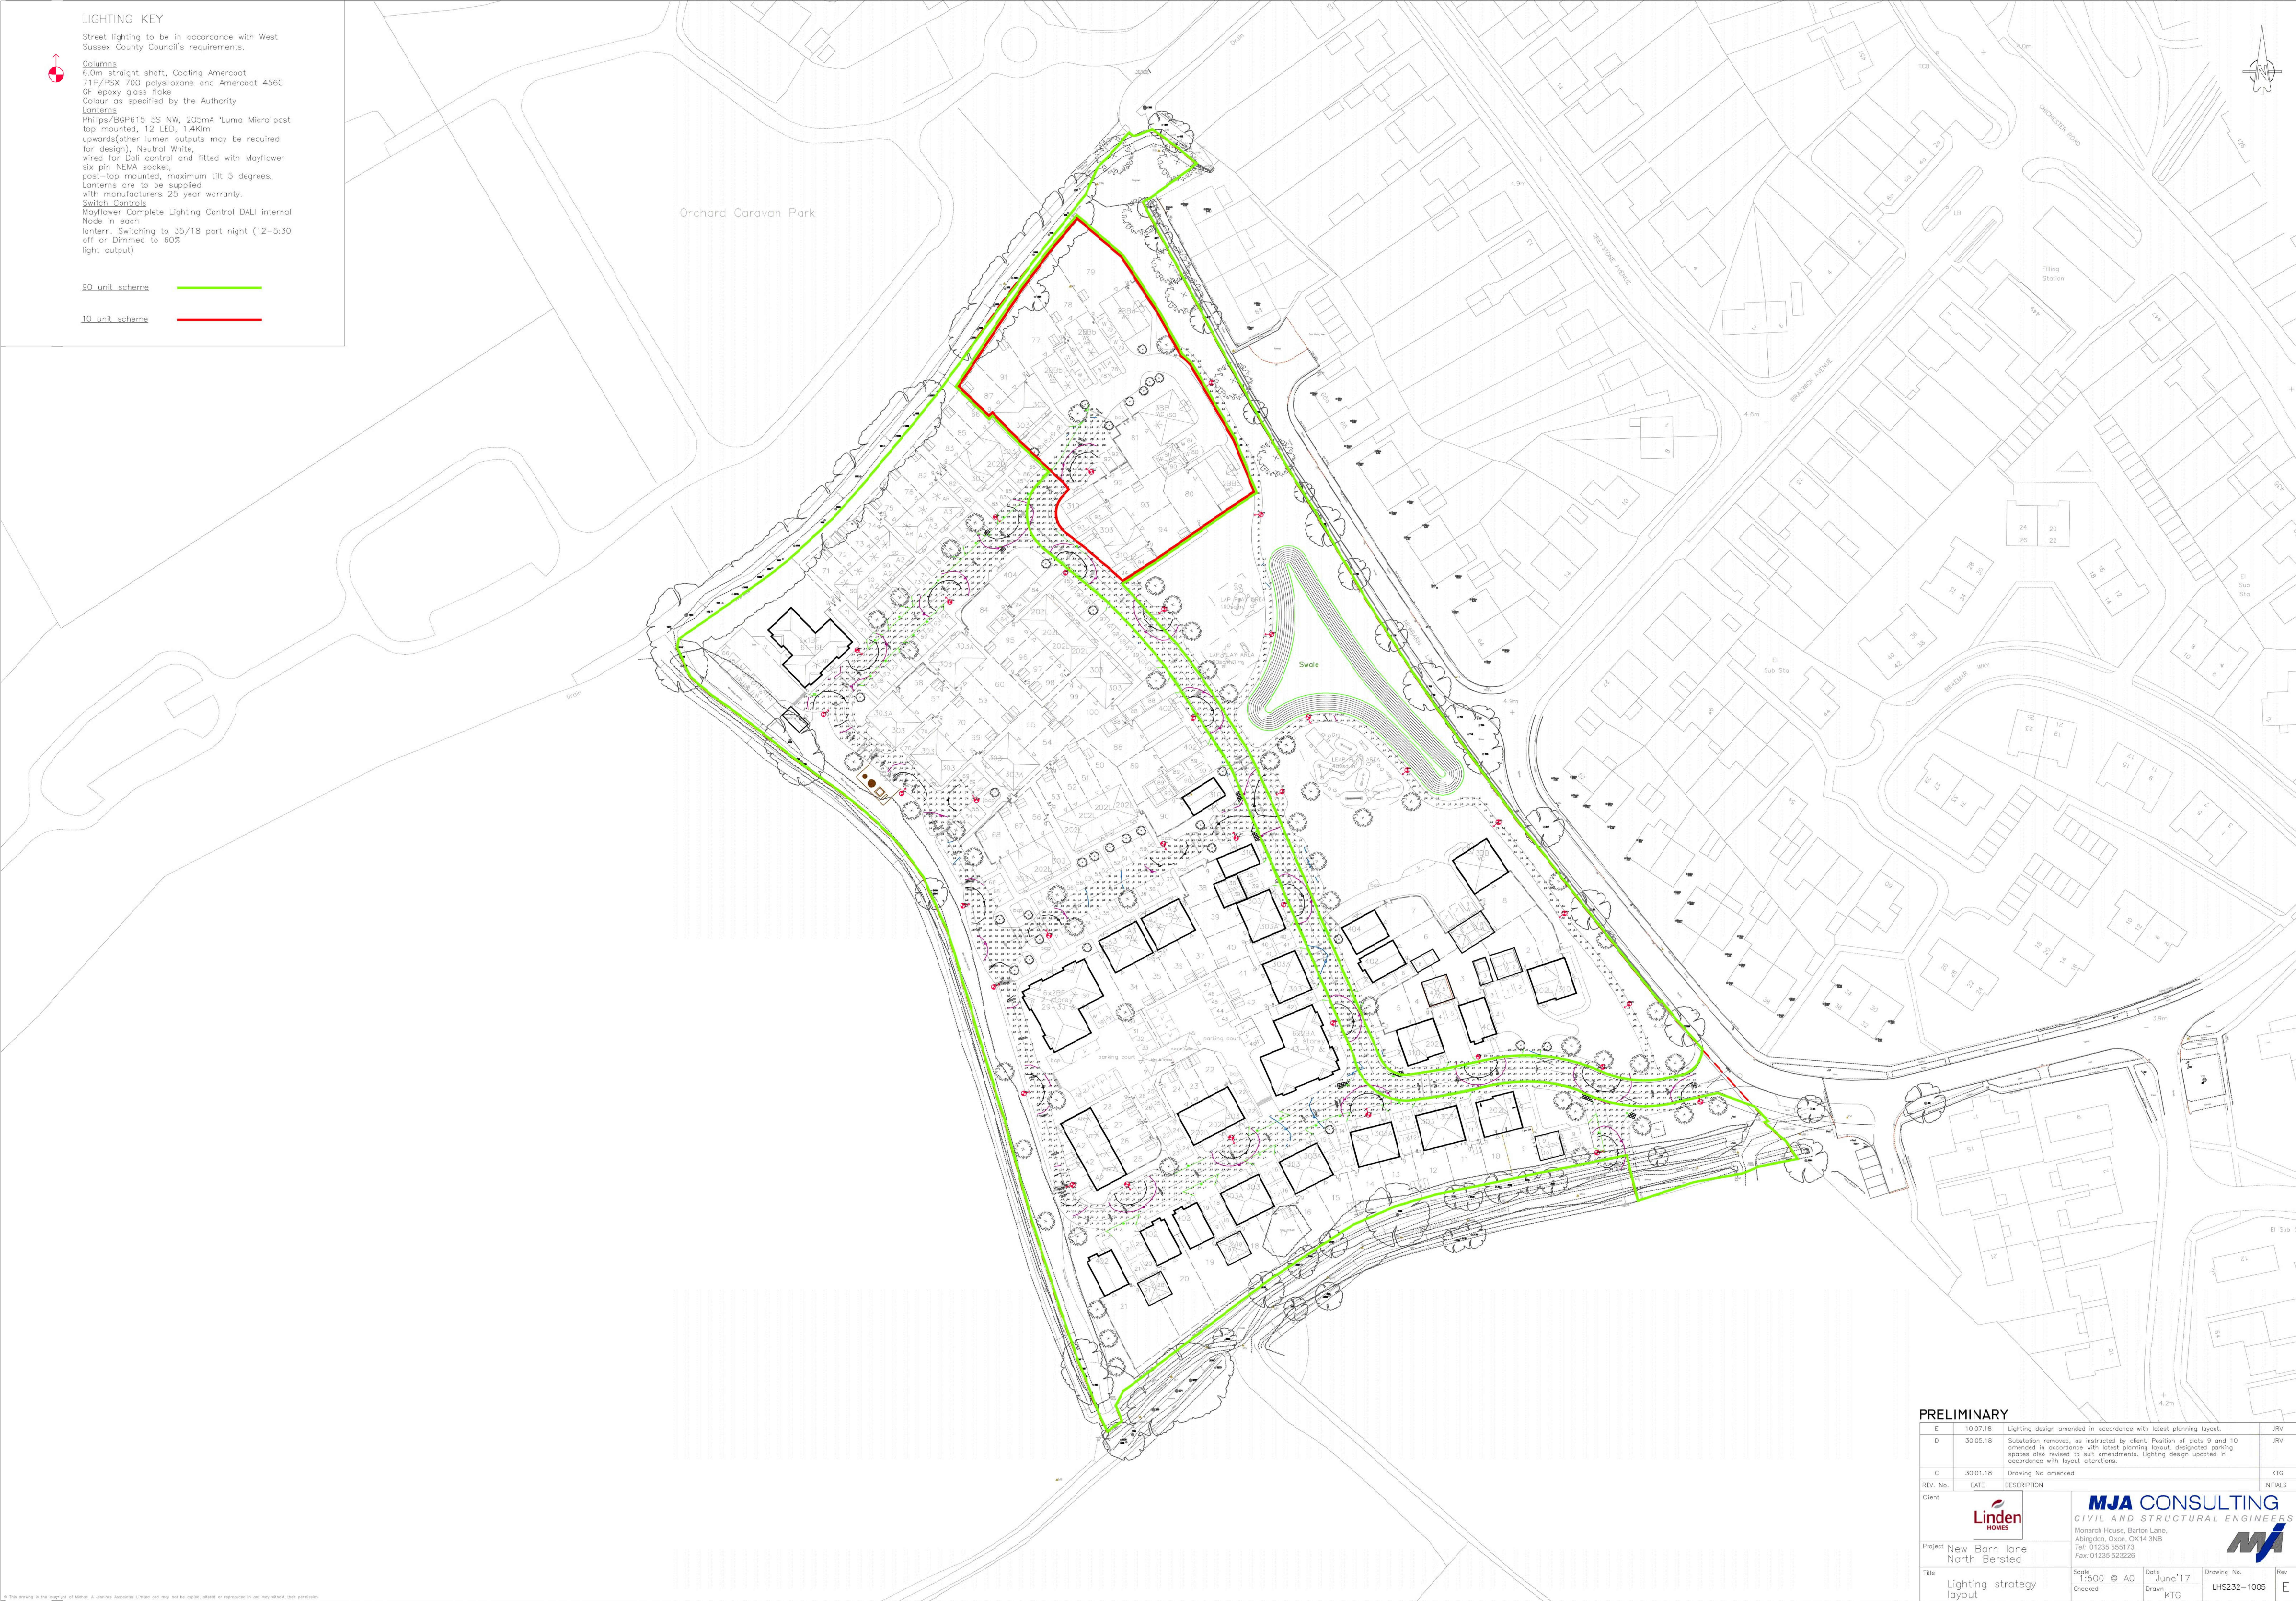

LIGHTING KEY

Street lighting to be in accordance with West Sussex County Council's requirements.

Columns
6.0m straight shaft, Coating Amercoat
71F/PSX 700 polysiloxane and Amercoat 4560
OF epoxy glass flake
Colour as specified by the Authority
Lanterns
Philips/BSP615 ES NW, 205mA 'Luma Micro post
top mounted, 12 LED, 1.4Klm
upwards (other lumen outputs may be required
for design), Neutral White,
wired for Dali control and fitted with Mayflower
six pin NEMA socket,
post-top mounted, maximum tilt 5 degrees.
Lanterns are to be supplied
with manufacturers 25 year warranty.
Switch Controls
Mayflower Complete Lighting Control DALI internal
Node n each
Lantern. Switching to 35/18 part night (2-5:30
off or Dimmed to 60%
lgh: output)

50 unit scheme

10 unit scheme

PRELIMINARY				
E	10.07.18	Lighting design amended in accordance with latest planning layout.	JRV	
D	30.05.18	Substation removed, as instructed by client. Position of plots 9 and 10 amended in accordance with latest planning layout. Designated parking spaces also revised to suit amendments. Lighting design updated in accordance with layout alterations.	JRV	
C	30.01.18	Drawing No amended	KTG	
REV. No.	DATE	DESCRIPTION	INITIALS	
Client				
Project New Barn lane North Bersted		Monarch House, Bartoe Lane, Abingdon, Oxon, OX14 3NB Tel: 01235 555173 Fax: 01235 523226		
Title Lighting strategy layout		Scale 1:500 @ A0 Drawn KTG	Date June '17 Drawing No. LHS232-1005	Rev E