


Construction Notes:

1. Do not scale from this drawing.
2. All dimensions in metres.
3. All levels relate to Ordnance datum.
4. This drawing is based on the latest Architectural planning layout and shall be read in conjunction with all other relevant longitudinal sections and construction drawings.
5. Any discrepancies with any of the drawings shall be reported to MJA Consulting Engineer.
6. The level and location of all existing services shall be verified on site by the Contractor before commencing any construction work.
7. Contractor must comply with all current legislation relating to CDM, Health and Safety and COSHH.
8. All material in excess of 20kg (i.e. kerbs, manhole units cover etc.) shall be mechanically lifted and laid where possible at all times.
9. Manholes, sewers, roadwalls and other structures intended to convey surface water or sewerage are to be constructed in accordance with the Water Authorities Association specification "Sewers for Adoption" 7th edition and to Southern Water specification and addendum.
10. Gullies, gully connections, drains, manholes, catchpits, sakkways, soakways and other drainage structures intended to convey highway water are to be constructed in accordance with the specification issued by West Sussex County Council.
11. All foul and storm water drains which are not to be adopted as public sewers under a section 104 agreement shall be constructed using uPVC pipes or similar approved, bedded and backfilled in accordance with the manufacturers instructions and to the Building Regulations Part H, BS EN 752 & B.R.E. SD1.
12. All building drainage to be 100mm dia laid at a minimum gradient of 1 in 60 (FW) and 1 in 80 (SW) unless otherwise shown.
13. Sewers and drains of different diameters should be laid side by side.
14. Inspection chambers on private drains shall be non-access preformed polypropylene.

| Depth to invert | Minimum size |
|-----------------|--------------|
| < 1.2m          | DN450        |
| > 1.2m          | DN600        |
- In accordance with the Building Regulations Part H & BS EN 752.
15. Position of soil pipes, substacks, WC outlets rainwater downpipes etc positions shall be checked against architects house type drawings to ensure compatibility.
16. Where back inlet gullies are used they should be roddable.
17. All stub stacks to be fitted with air admittance valve where branch drain exceeds 12m except at head of run.
18. Rainwater downpipes to be connected directly to drains via removable adaptor to permit access for rodding.
19. Positions of yard and house gullies are nominal and may be adjusted on site, also drains to be installed at the end of all drives facing towards the public highway. All gully gratings in drives and parking areas should be of sufficient strength to withstand vehicular loading.
20. Lintels or sieves are to be provided for drains passing through foundation brickwork.
21. All gully connectors to be 150 dia. uPVC ultrab or similar.
22. All gully connectors other than at manholes to be "Y" junctions.
23. All drain runs are to be flushed through and building materials removed where necessary at the time of final test by Building Inspector and prior to occupation.
24. All soakways to be positioned a minimum of 5.0m from buildings (where unlined).
25. All finished floor levels are shown on the drawing for guidance only and may need to be adjusted on site, however there is to be no deviation without prior approval.
26. All drives are to have a crossfall or gradient of 1:40 minimum. Maximum drive gradient on down slope to be 1 in 10 and 1 in 8 on up slopes.
27. Continuous edging to be laid at rear of service margin.

KEY:

Proposed Adoptable Sewers:

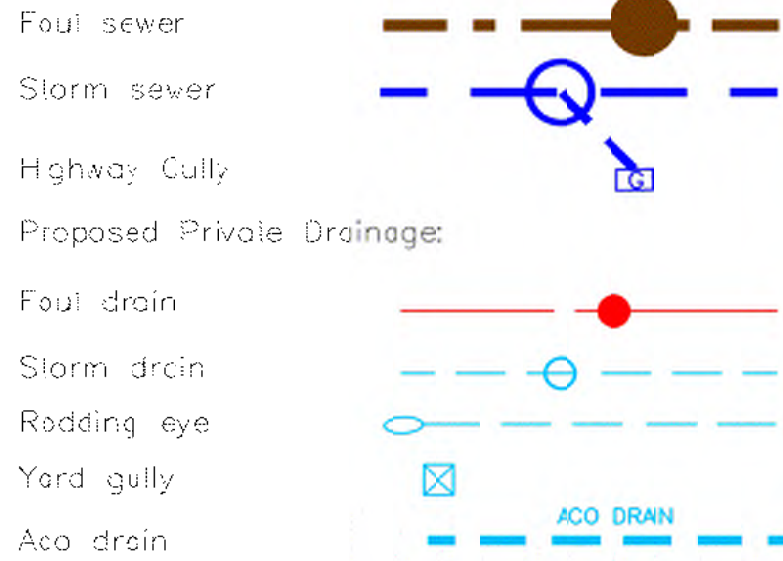

All private inspection chambers shall be polypropylene non-access chambers in accordance with The Building Regulations, Part H.  
Chamber sizes:  
Depth to invert <1.2m DN450  
Depth to invert >1.2m DN600

Invert levels shown thus:  
F10.00 S10.00  
Primary mobility access  
Stepped Cavity Tray  
External Brickwork  
Tanking  
Slab on Edge

Orchard Caravan Park

