


43

42

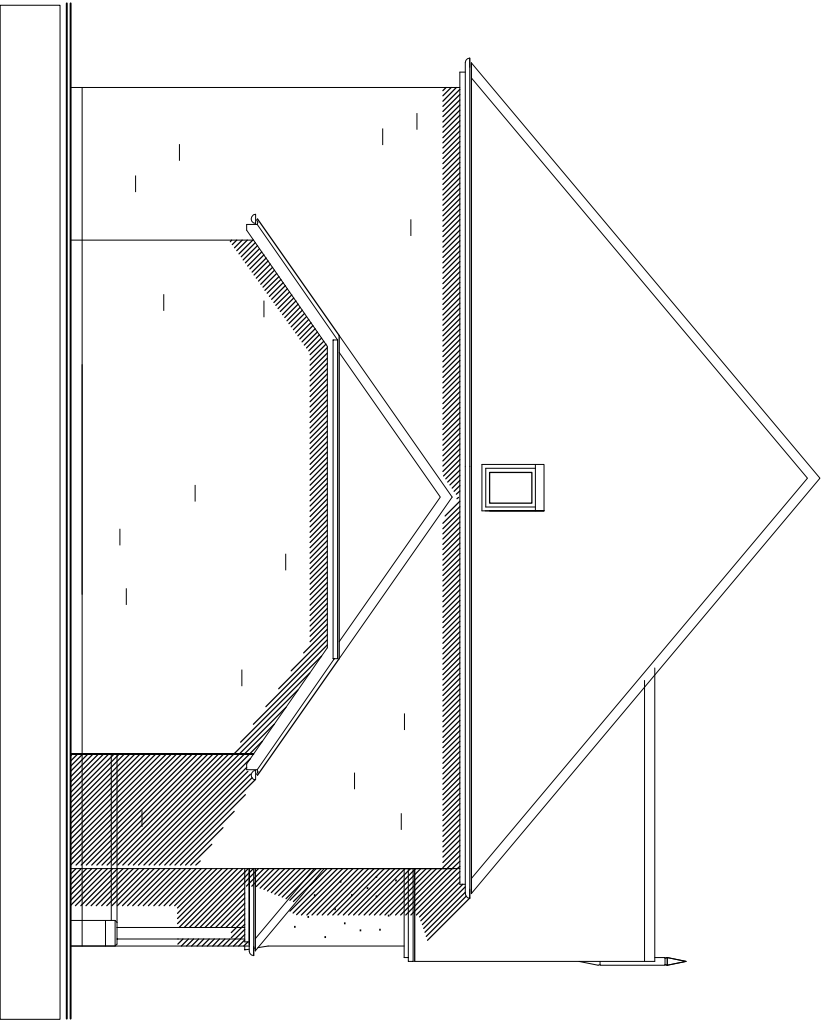

43

MATERIALS SCHEDULE

Roof:

Red plain tiles at 40 degrees to roof. Matching ridge tiles. Exposed rafters feel set behind fascia to eaves. Painted support posts to entrance porch with stop end chamfered corners on brick plinths. Exposed rafter to gables with final (front elevation) & exposed purlin detail.

Walls:

Off white render to first floor front & part side elevations, remaining elevations in weathered Barn Stock facing brickwork with matching dressings. Red projecting single string course plinth detail to front elevations & part side. Reconstituted stone vent detail to gable & window cills.

Windows:

Traditional white pre-finished double glazed casement windows with fanlights. All Bathrooms, Shower Rooms & Kitchens to have obscured glazing.

Double Doors:

Double glazed doors / sliding folding doors.

Front Doors:

Hardwood vertically boarded with glazed light.

Rainwater Goods:

Black upvc half round gutters with matching downpipes.

Crossley Design Associates

architects

21 Holeybridge Walk Tonbridge Kent TN11 9JL
t. 01743 782943 e. mail@crossleydesign.co.uk

client

GRAYFERN HOMES

project

RESIDENTIAL DEVELOPMENT
YAPTON ROAD
BARNHAM
WEST SUSSEX

drawing

ELEVATIONS - Sheet 9 of 20

scale date job no. drawing no. rev.

1:100 MAY 15 1505 2:24 -

REAR ELEVATION - West

42

43

FRONT ELEVATION - East

SIDE ELEVATION - South

SIDE ELEVATION - North

42