

Figure 2 Default specification for protective barrier



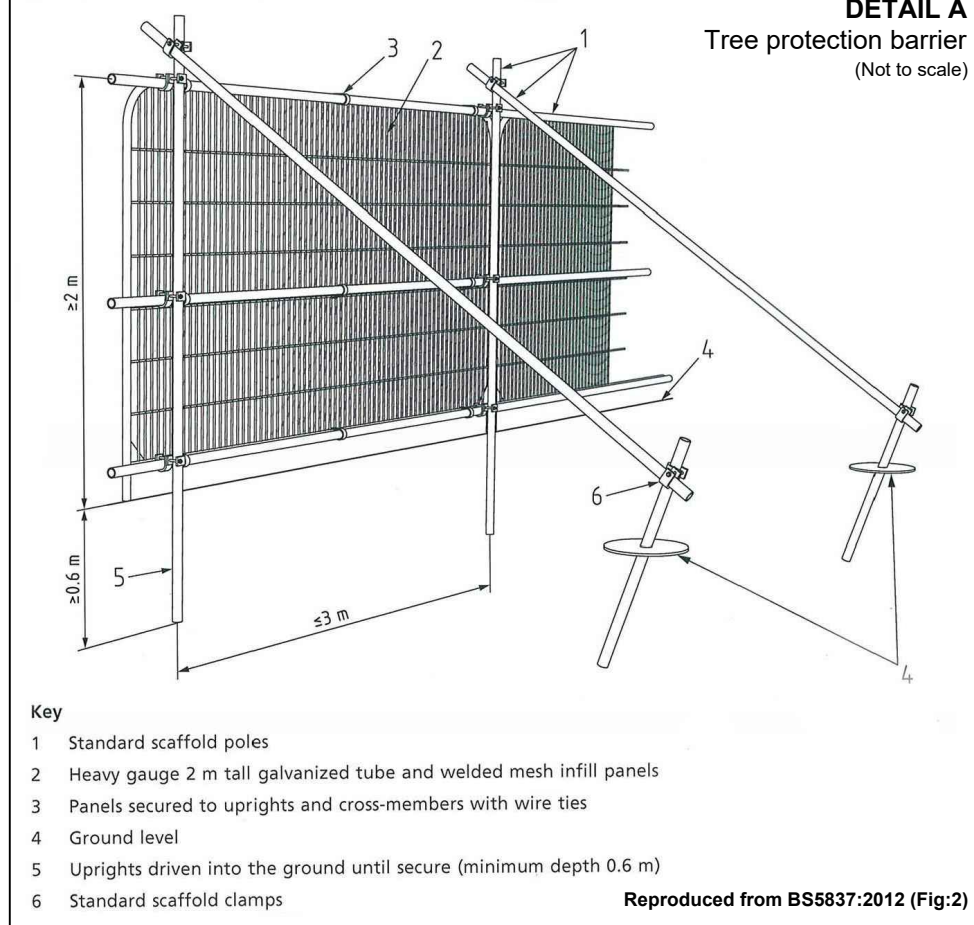


Figure 3 Examples of above-ground stabilizing systems

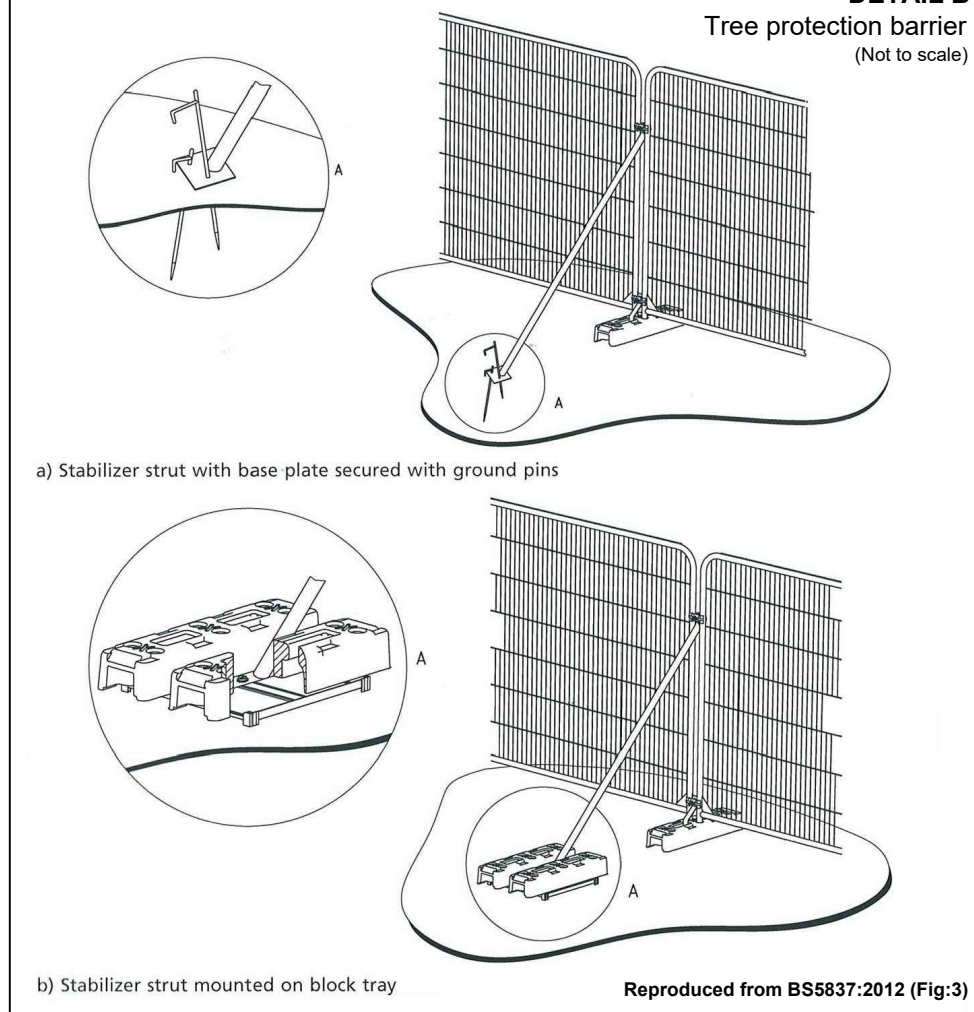

© 2019 RPS Group
Notes
1. This drawing has been prepared in accordance with the scope of RPS's appointment with its client and is subject to the terms and conditions of that appointment. RPS accepts no liability for any use of this document other than by its client and only for the purposes for which it was prepared and provided.
2. If received electronically it is the recipient's responsibility to print to correct scale. Only written dimensions should be used.
3. Where applicable Ordnance Survey (c) Crown Copyright 2019
All rights reserved. Licence number 0100031673

Key

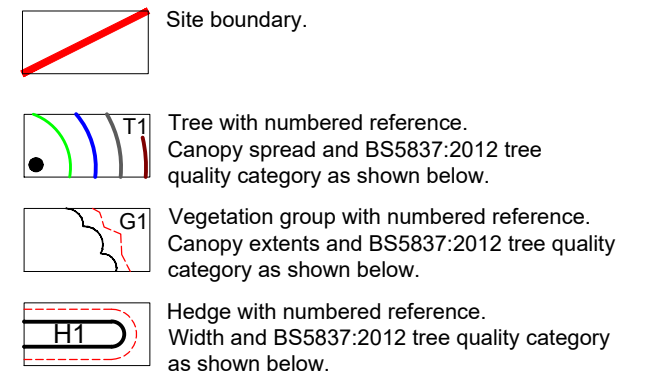

BS 5837:2012 Tree Quality Categories - Table 1

- Category A - High quality
- Category B - Moderate quality
- Category C - Low quality
- Category U - Unsuitable for retention

Trees protected by Arun DC - Tree Preservation Order reference - TPO/BN/1/10.

Root protection area (RPA) Calculated in accordance with Section 4.6 - BS5837:2012

Tree to be removed with numbered reference. Canopy spread and BS5837:2012 tree quality category.


Vegetation group or hedge to be removed with numbered reference. Canopy spread and BS5837:2012 tree quality category.

Temporary protective fencing in accordance with Section 6.2 - BS5837:2012. See inset details for example barriers.

- NOTES:
- Refer to RPS Tree Survey Report & Schedule for further details.
 - Survey based on a visual inspection from the ground and is not intended as a full arboricultural inspection.
 - Plan produced in accordance with recommendations set out in BS 5837:2012 - 'Trees in Relation to design, demolition and construction'.
 - Due to the legal protection afforded to breeding birds vegetation removal should not take place during the bird nesting period, generally, although not restricted to, March - August inclusive.
 - Survey based upon topographic survey produced by MK Surveys in Horsesham, July 2019.
 - Pedestrian/vehicular emergency access routes to be maintained at all times.
 - All protective fencing to be completed and approved by LPA / CA prior to commencement of any site works.
 - All works to conform with requirements of: BS 5837:2012 - 'Trees in relation to design, demolition and construction'

Scale Bar
0m 25m 50m

Rev	Description	By	CB	Date
-----	-------------	----	----	------

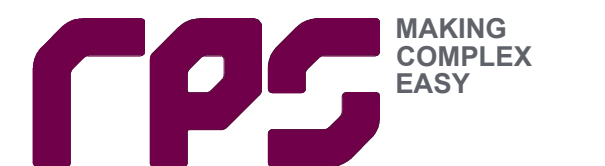

Lakesbury House, Hittingbury Road, Chandlers Ford, Hampshire SO53 5SS
T: 02380 810 440 E: rpssso@rpsgroup.com

Client **Redrow Homes**

Project **Angels Nursery Barnham**

Title **Tree Protection & Removal Plan**

Status	Drawn By	PM/Checked by
For Information	JMB	DC

Job Ref	Scale @ A1	Date Created
JSL3362	1:500	January 2020

RPS Drawing / Figure Number	Rev
701	-

rpsgroup.com