
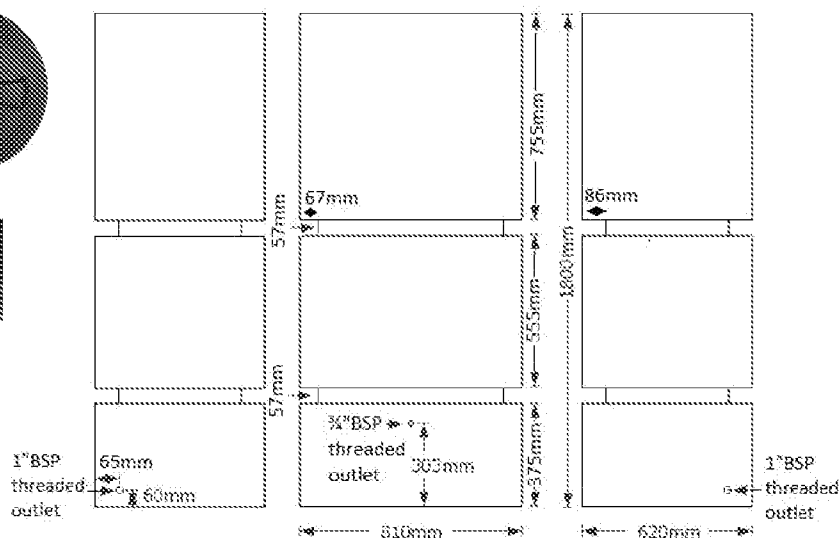




RWH-800PIL

Product description: 800 litre pillar tank with multiple outlets, suitable for internal or external use

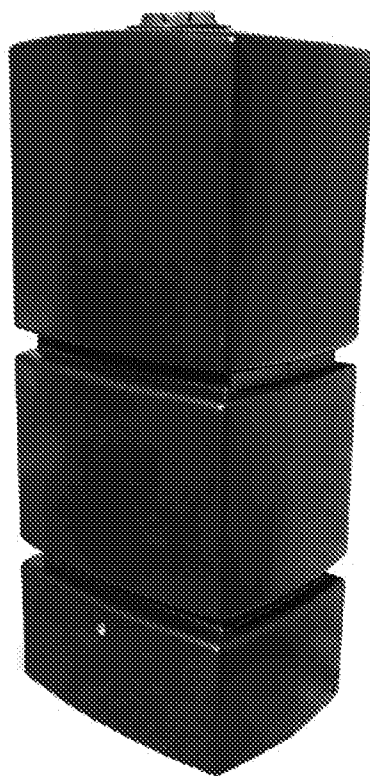

Product Information					
Height	Width	Depth	Weight	Outlets	Lid
1800mm	810mm	620mm	40kg	1 x 3/4" & 2 x 1" BSP	9" screw-down

PRODUCT NOTES:

Sizes approximate, owing to shrinkage

- Tank must be sited on a level, fully supportive base leaving a gap of at least 50mm from walls or other tanks
- Multiple outlets. Raised tap connection allows containers to be filled. Lower outlets allow tank to be completely drained
- Fixing brackets and instructions supplied
- Outlets not drilled unless requested

PRODUCT DETAILS:

- Made from virgin polymer
- Approximate wall thickness: 6-7mm
- Vented 9" screw-down lid as standard
- 3/4" raised brass threaded outlet
- 2 x 1" brass threaded outlets – one on each side
- Fixing brackets

OPTIONAL EXTRAS:

- Brass tap
- Brass isolation valve with hose connector
- Upgrade to 14" or 16" screw-down lid
- Tank connectors
- Stainless steel inserts
- Heavy duty restraining kit
- Non vented lid

BENEFITS:

- Suitable for internal and external use
- Frost proof; will not crack in the cold
- Robust, heavy duty product; industrial strength
- Modern, minimalist pillar design
- Small footprint maximises capacity when space is limited
- Tanks can be connected together using bottom outlets
- Opaque plastic reduces algae growth in sunlight
- Rotationally moulded for strength and durability
- 2 year warranty against manufacturing defects

Rainwater Harvesting Limited
Unit A Harrier Park
Southgate Way
Orton Southgate
Peterborough
PE2 6YQ

