


Rain Activ maintenance schedule.

Filter: *Warranty 2 years. Expected service life 100 years.*

Self cleaning filter with 1000 micron screen.


Every 6 months. Visually check the filter for larger blockages.

1. Release child locks on the lid. (13mm bolt).




2. Inspect filter for visible large blockage.

If large or non moving debris is found refer to stage 3. If none is found refer to stage 6.




NB: Small debris will be periodically self cleaned during storms. Leaves, moss and other smaller debris will self clean and do not require removing unless obvious they are causing a blockage.


3. (If a blockage has been found) Remove filter lid.




4. Remove debris, wash filter head under a tap.

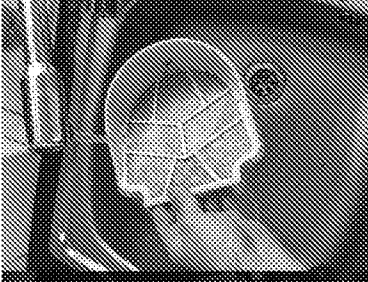


5. Replace filter head.

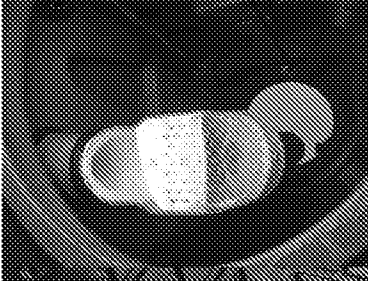

6. Replace lid, ensure 13mm child safe locks are tight.

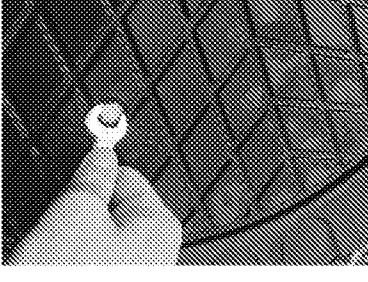

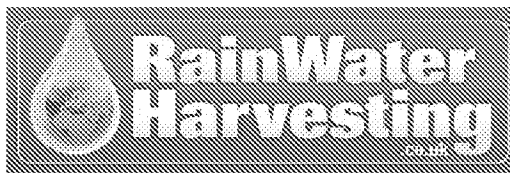


Risk if neglected: Very low, possible reduction of filter efficiency. Reduction in quality of water for rainwater harvesting.

NB: the filter is fully self cleaning under normal conditions. Only abnormal or large debris from gutters can cause a blockage.

Maintenance frequency can be reduced by adding additional leaf and debris guards to gutters. Dependant on the quality of guarding and location, maintenance intervals can be reduced to 12, 18, or 24 months.


Examples of gutter guarding systems.

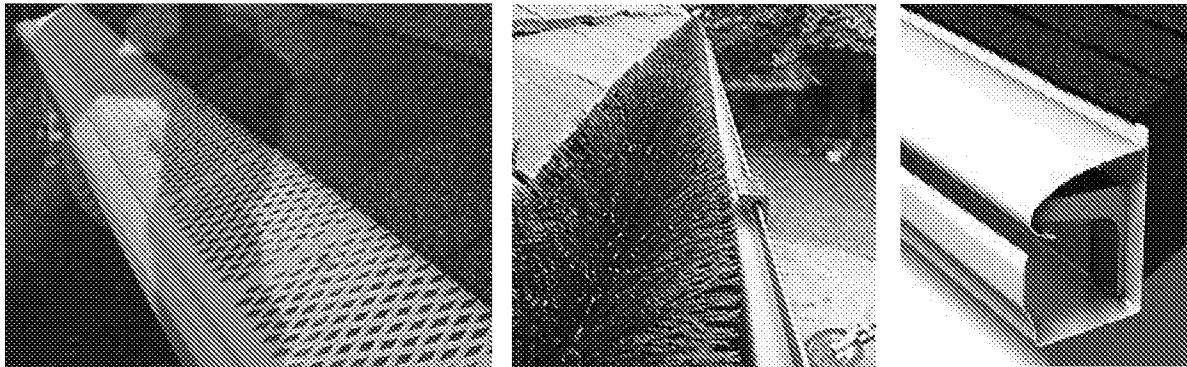

F-Line Tank. *Warranty 25 years. Expected service life 100 years.*

Every 10 years. Pump out completely and clean sidewalls with pressure washer, pump out using dirty water pump. (Around 0.5cm of very fine silt builds per year.)

Risk if missed: Low, potential reduction in water quality for rainwater harvesting. If missed multiple times (circa 50 years), potential blockage of outlet orifice.

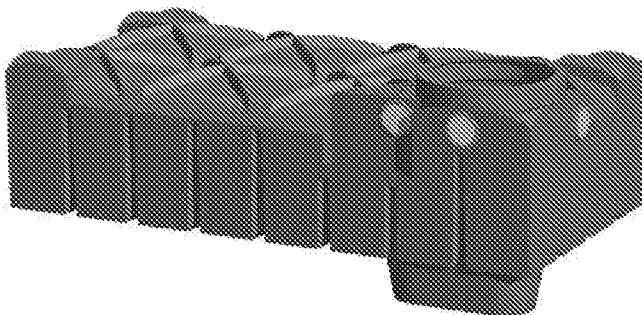

Gutters: N/A

Clean every 10 years to reduce strain on self cleaning filter. Remove all leaf matter, moss, debris. Wash through.

Risk if missed: Very low, increased fine sediment entering the tank.