

CircLED Single Grey Top Adjustable 5-17° 1640lm 4000K Ra>80


On/Off

Article code:

8246084468

EAN:

5703821165822



Light technic

Type of light source:	LED
Wattage:	14W
System wattage:	14W
Luminous flux:	1640lm
Efficacy:	117 lm/W
Voltage:	230V
Colour temperature:	4000K
Colour rendering (CRI):	Ra>80
MacAdams factor:	SDCM: 2
Lifetime:	L90/B10>100,000
Light distribution:	Single Lens
Optic:	Lens

Control/Dimming

Type:	On/Off
-------	--------

Protection

Luminaire class:	Class II
Ingress protection rating:	IP66
Vandal class:	IK09
Ta nominel:	Ta=25°C
Lightning protection:	Integrated surge protection (min. 4 kV)

Energy and approvals

Energy class:	A++
Approval:	CE

Materials and finish

Housing:	Die-cast aluminium
Colour:	Grey (structure 2150 sablé)
Optics:	Glass

Mounting/Connection




Mounting:	Post - adjustable head 5-17°, Outdoor
Cable:	Cable 2x1mm² 6m
Wind projected area:	415cm² - Max 6,2 kg
Max. luminaires per circuit breaker:	B10: 32, B16: 50, C10: 52, C16: 85

Dimensions (mm)

Length (L):	460
Width (W):	390
Height (H):	185
Weight (brutto/netto):	8.2 / 8

Packaging

Packing dimensions:	525 x 395 x 210
---------------------	-----------------

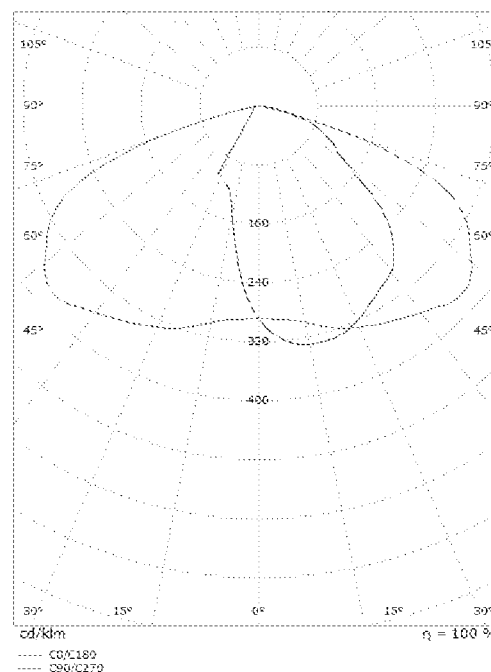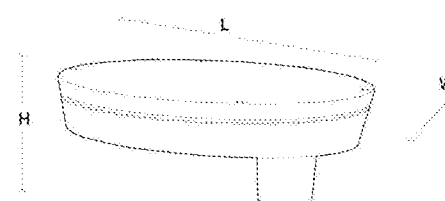

5 7 0 3 8 2 1 1 6 5 8 2 2